


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
			℃


/ Electrical Characteristics(Ta=25)

						μ
						μ
						μ
						μ
						μ

/ Electrical Characteristic Curve

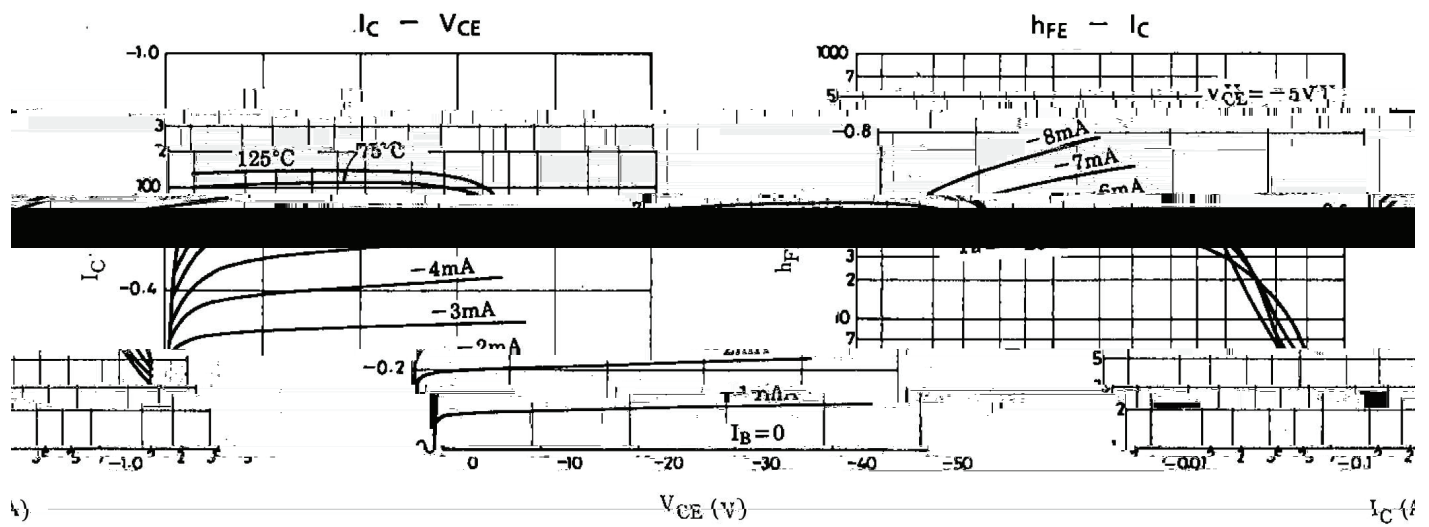


/ Package Dimensions

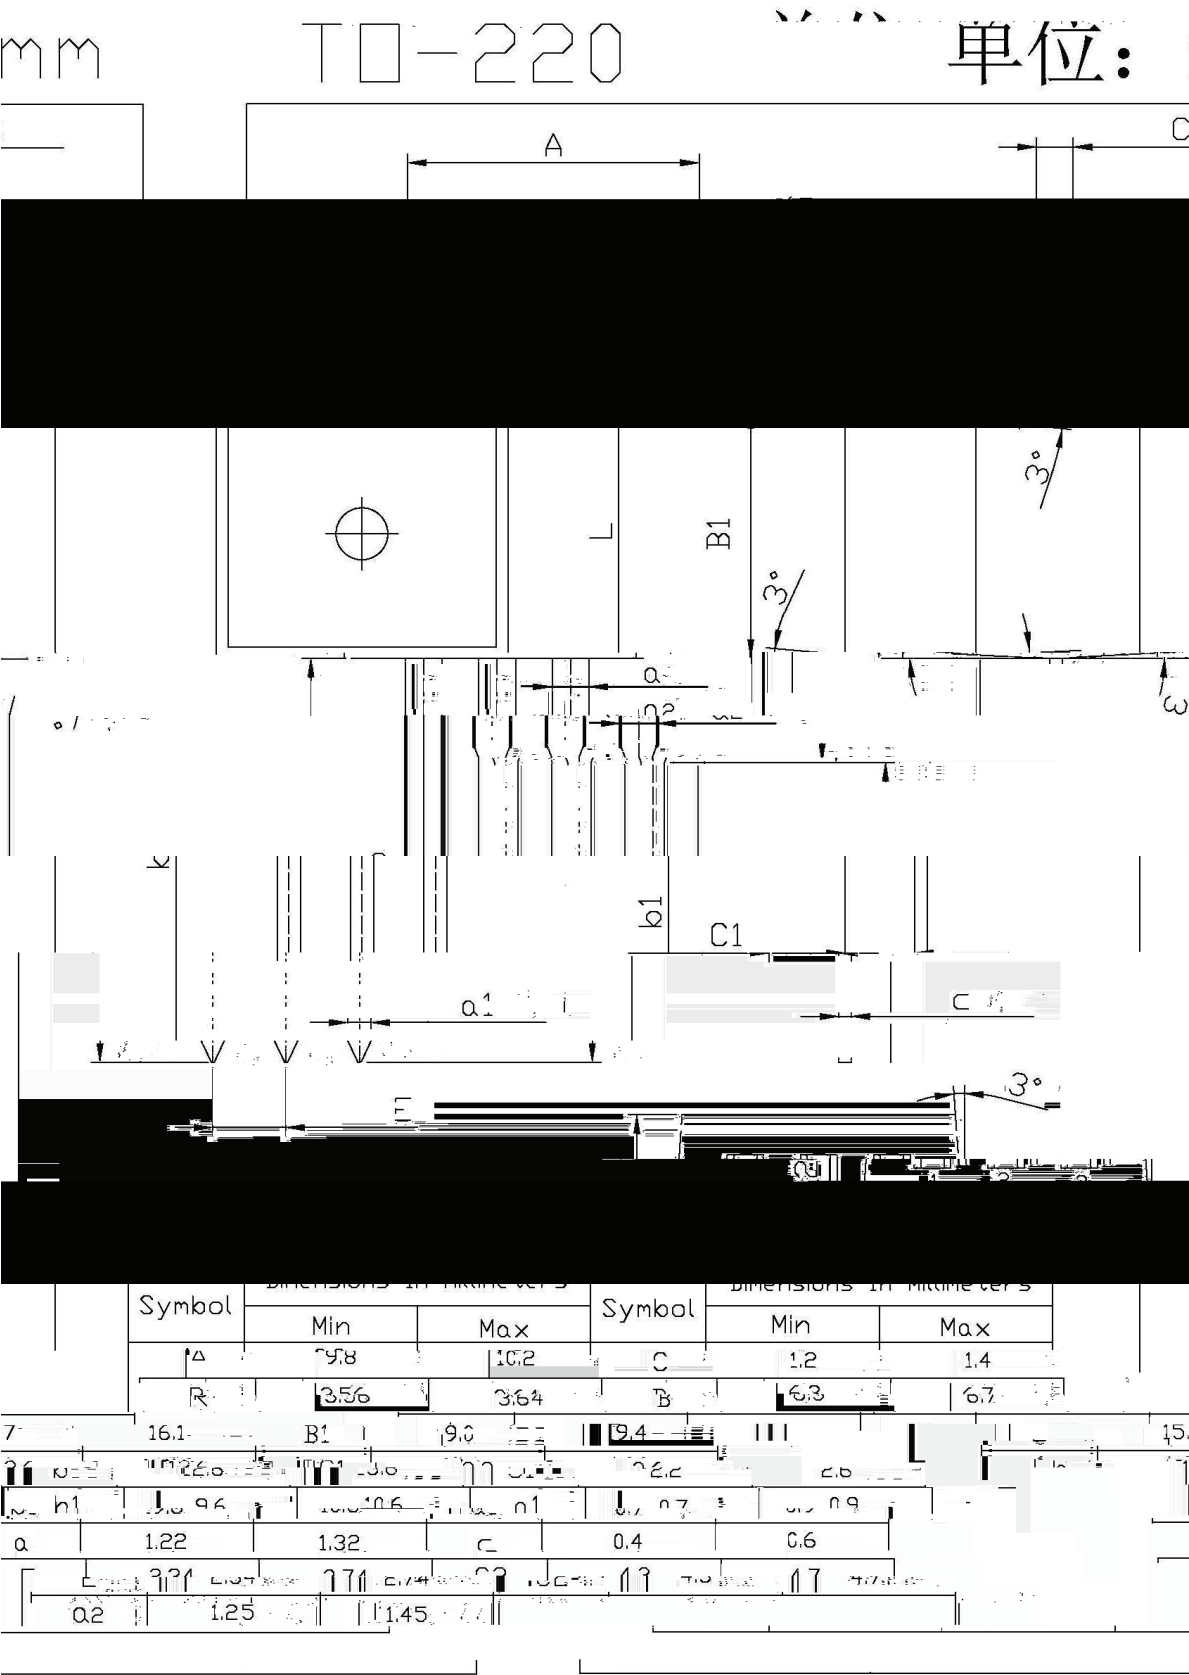

/ Marking Instructions



() / Temperature Profile for Dip Soldering(Pb-Free)

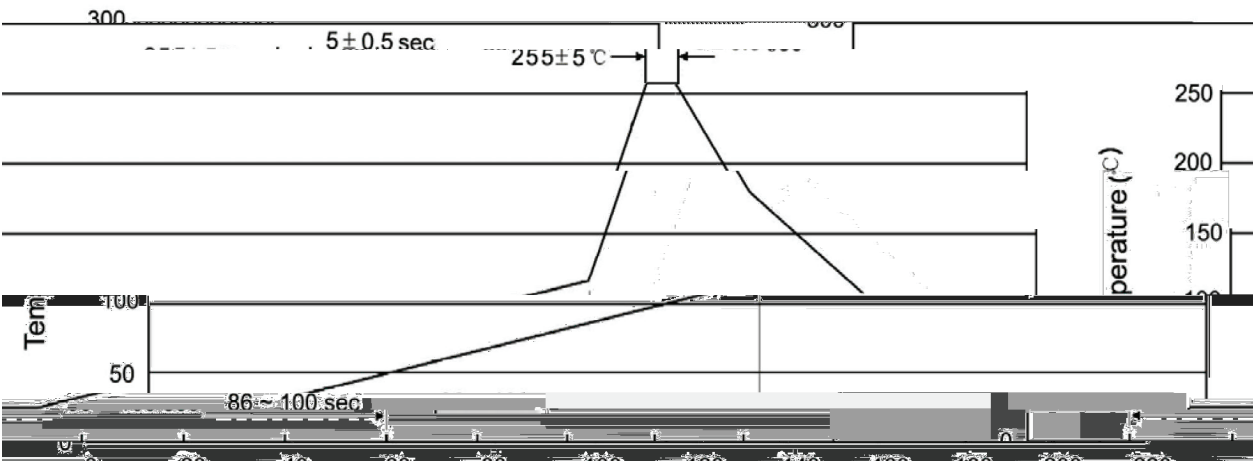

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

/ Notices