

/ Descriptions


SOT-23 PNP

/ Features


， 2SD1781K

/ Applications

/ Equivalent Circuit



/ Pinning








/ h_{FE} Classifications & Marking

	~	~

			℃
		~	℃


/ Electrical Characteristic Curve

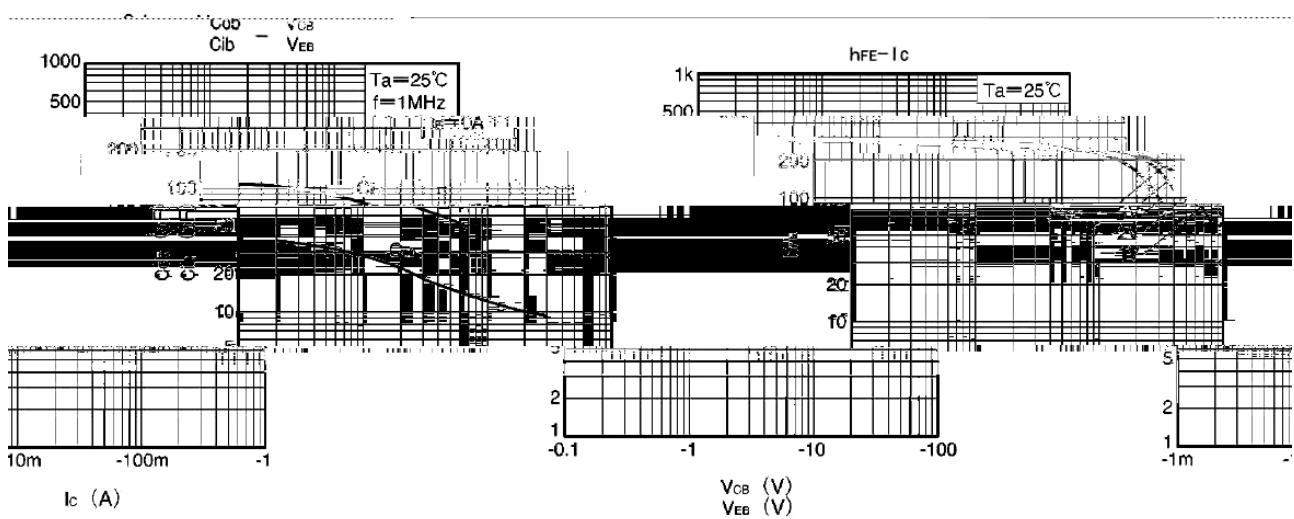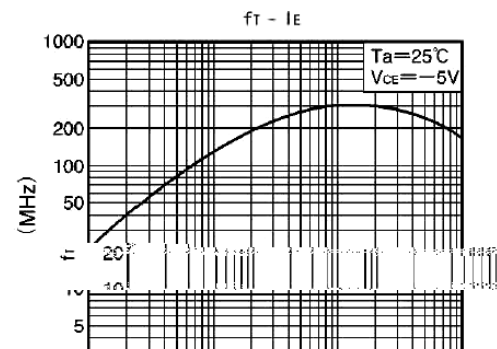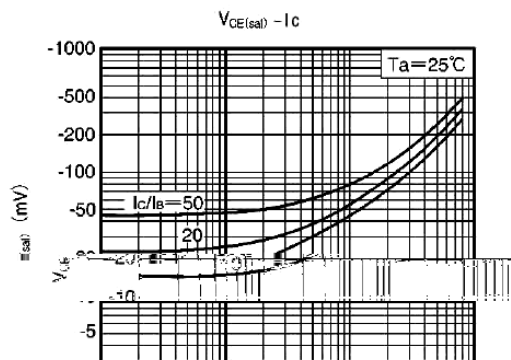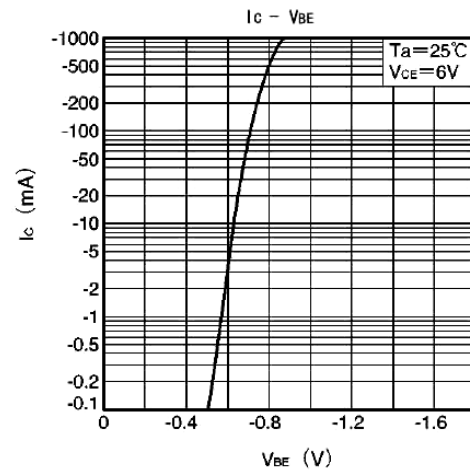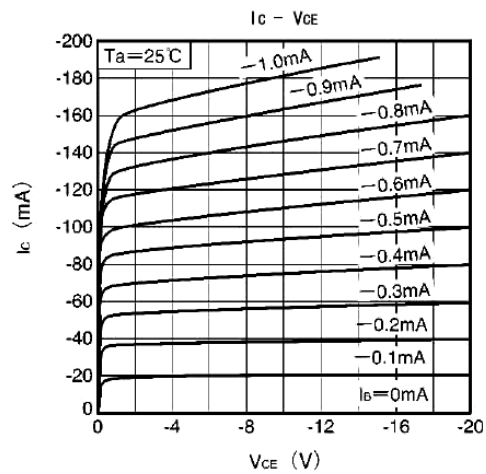


/ Package Dimensions

SOT-23

单位: mm

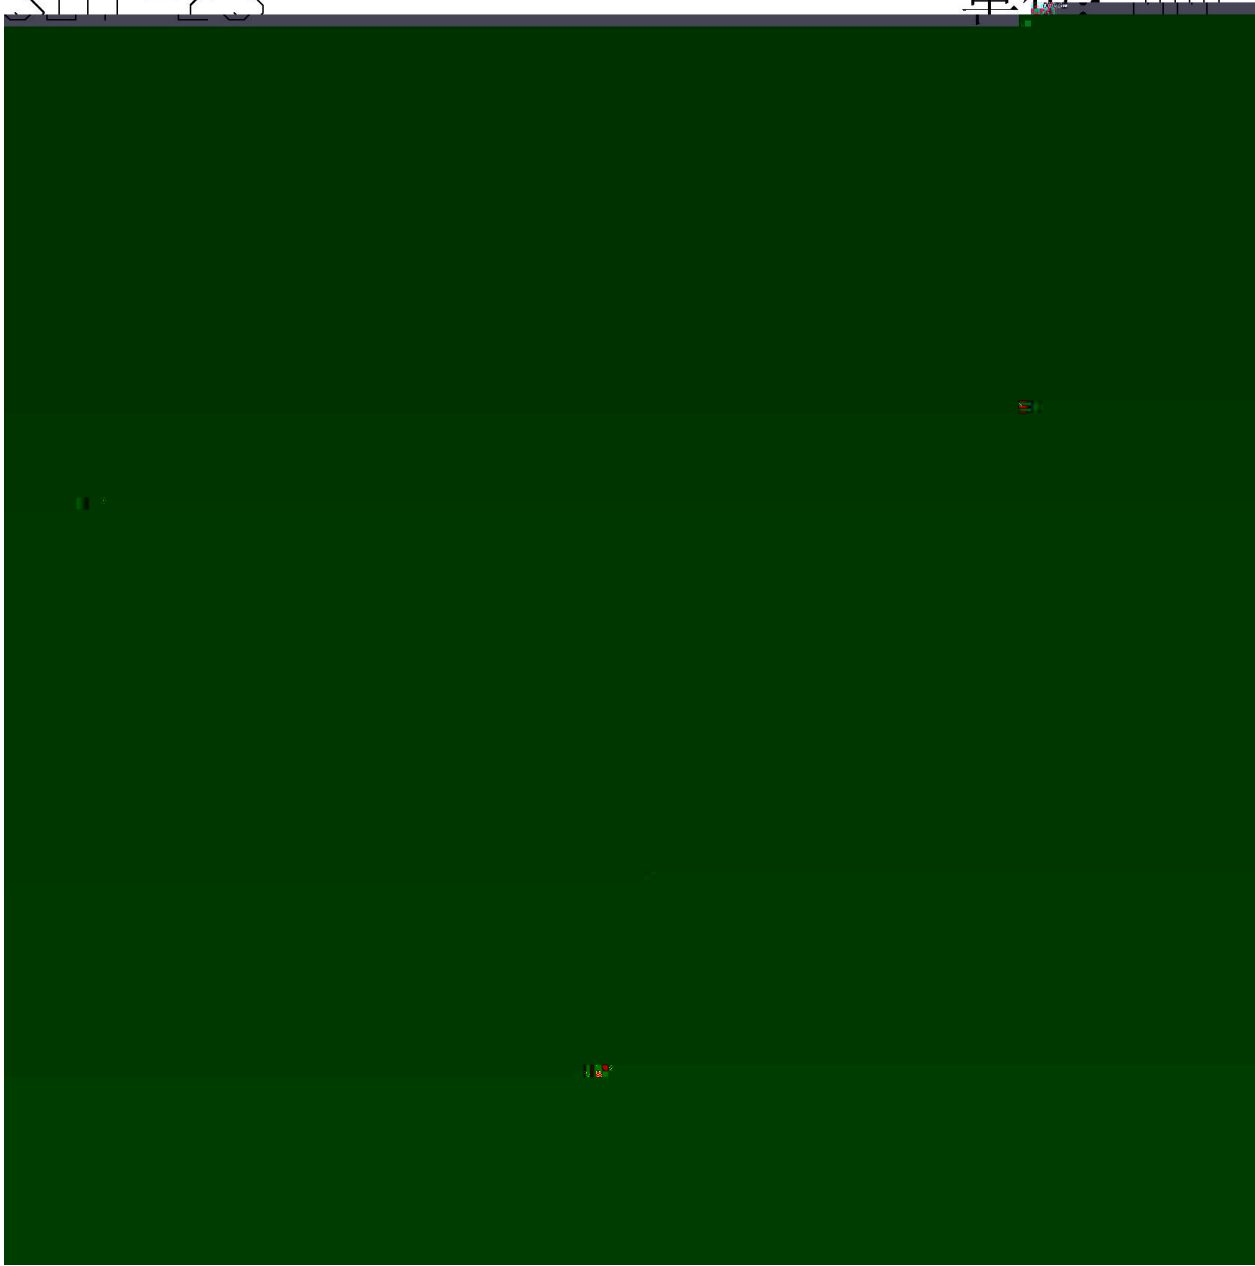


/ Marking Instructions

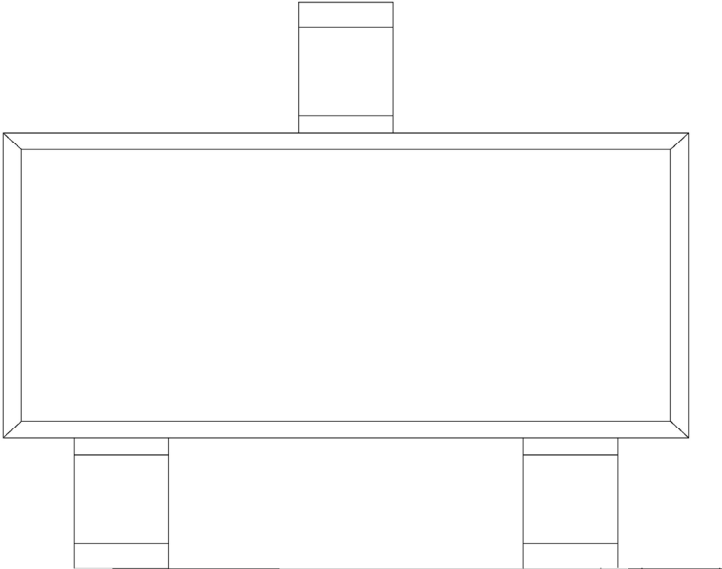

H
AH
Q:

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

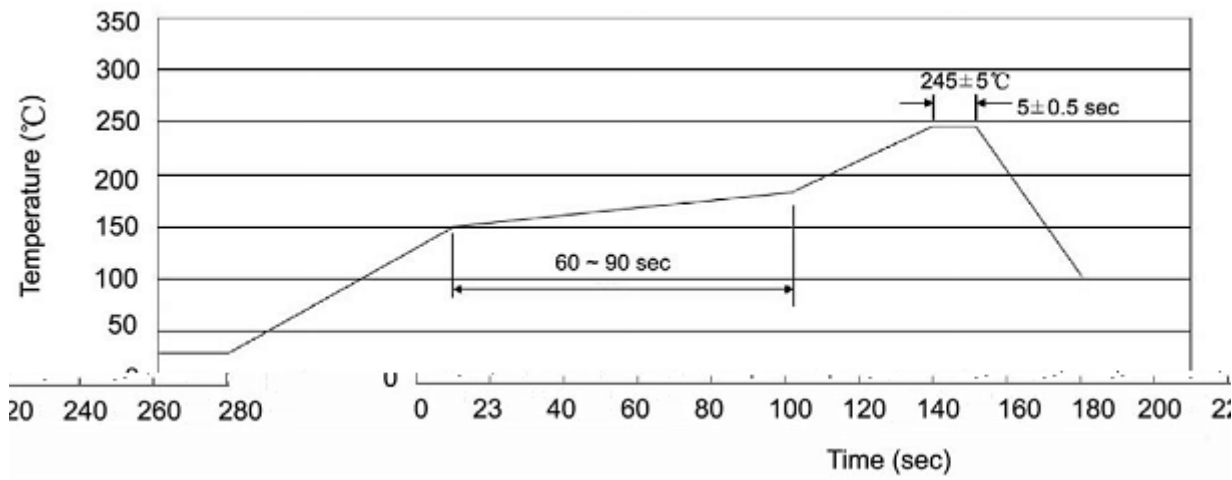

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

℃ ℃

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ Notices