


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

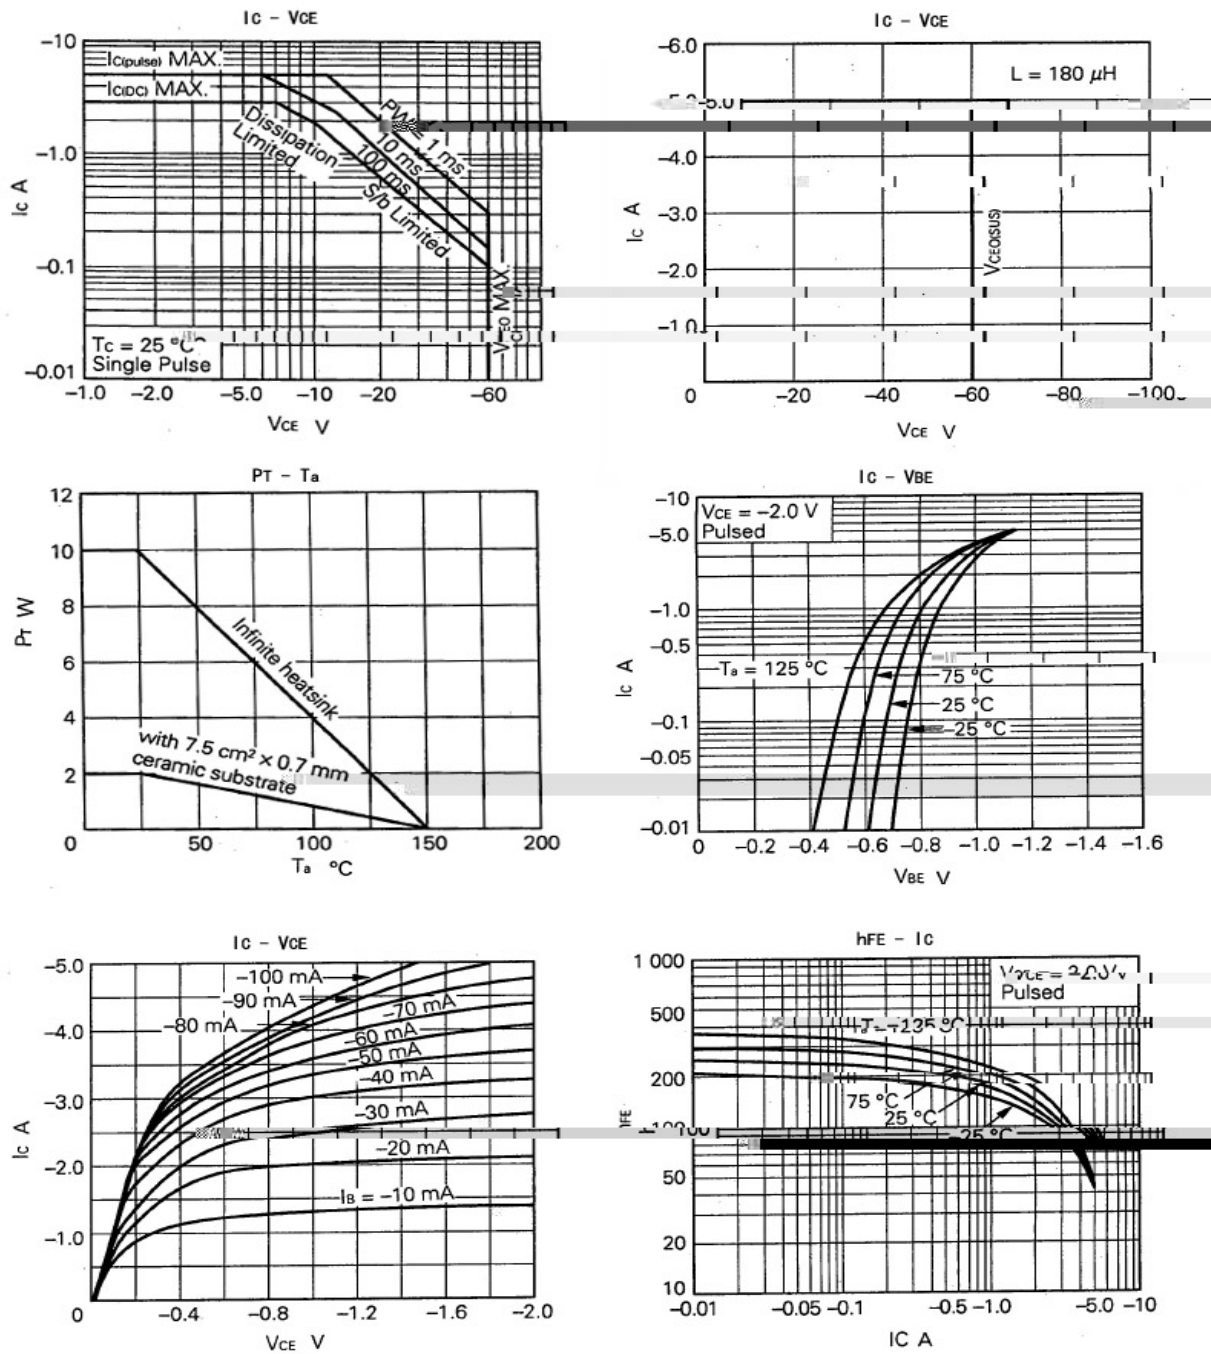

/ Package Dimensions

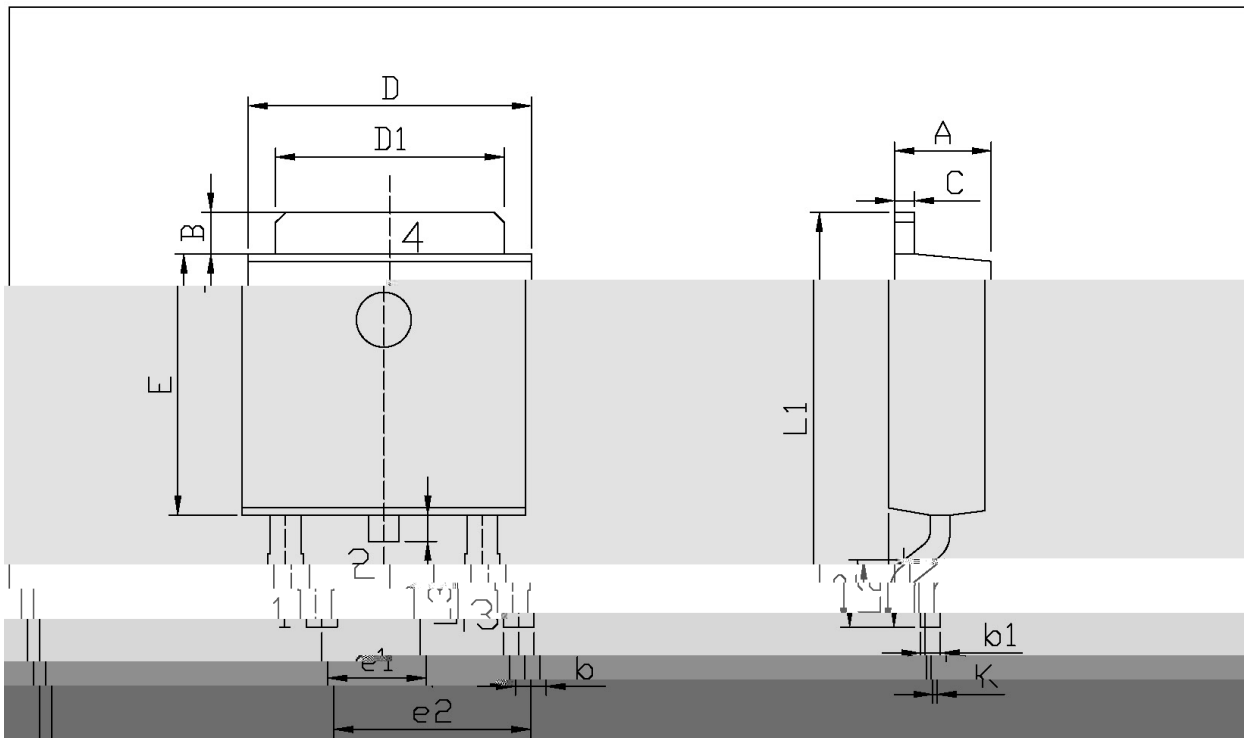


单位: mm


		Dimensions In Millimeters			Dimensions In Millimeters		
		Symbol	Min	Max	Symbol	Min	Max
			A ₁	2.20		2.40	E ₁
		B	0.95	1.25	e1	2.24	2.34
		b	0.50	0.70	e2	4.43	4.73
		b1	0.45	0.55	L1	9.45	9.95
		C	0.45	0.55	L2	1.25	1.75
		D	6.45	6.75	L3	0.60	0.90
		D1	5.10	5.50	K	0.00	0.10

T0-252

/ Marking Instructions

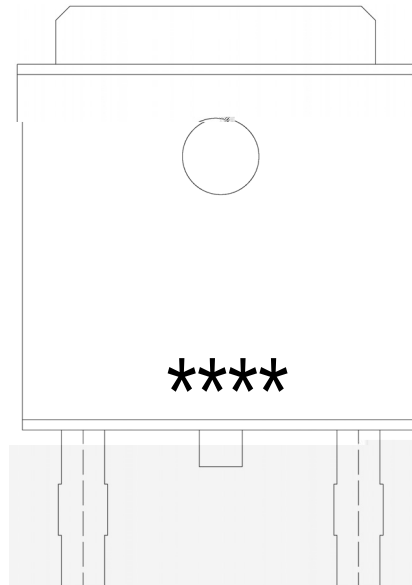

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

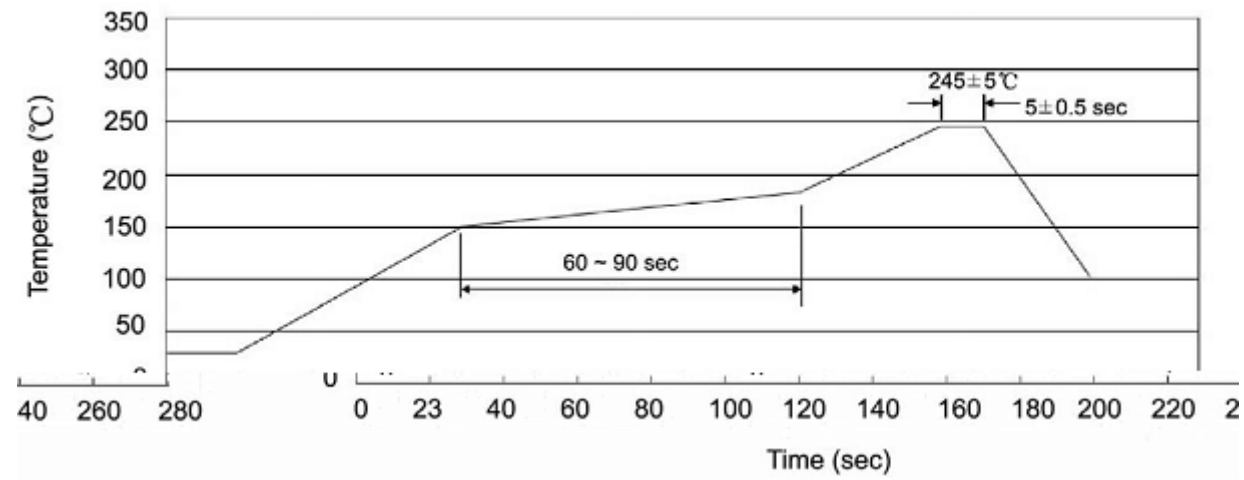

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	5	25,000	13 ×16	360×360×50	385×257×392

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

/ Notices