


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning




/ h_{FE} Classifications & Marking

	℃		℃

/ Electrical Characteristic Curve

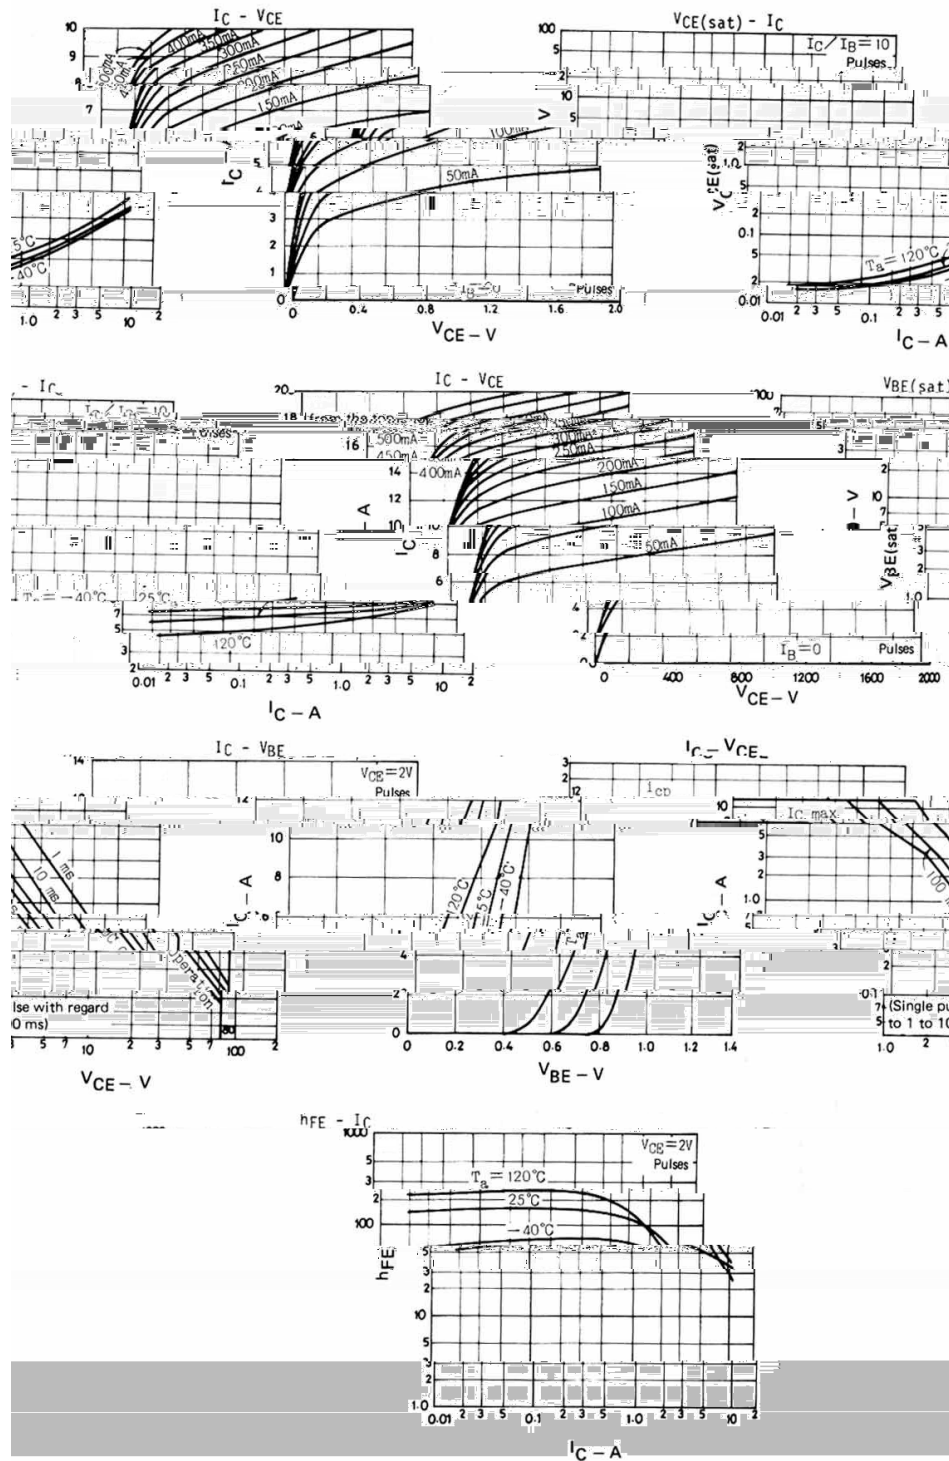


/ Package Dimensions

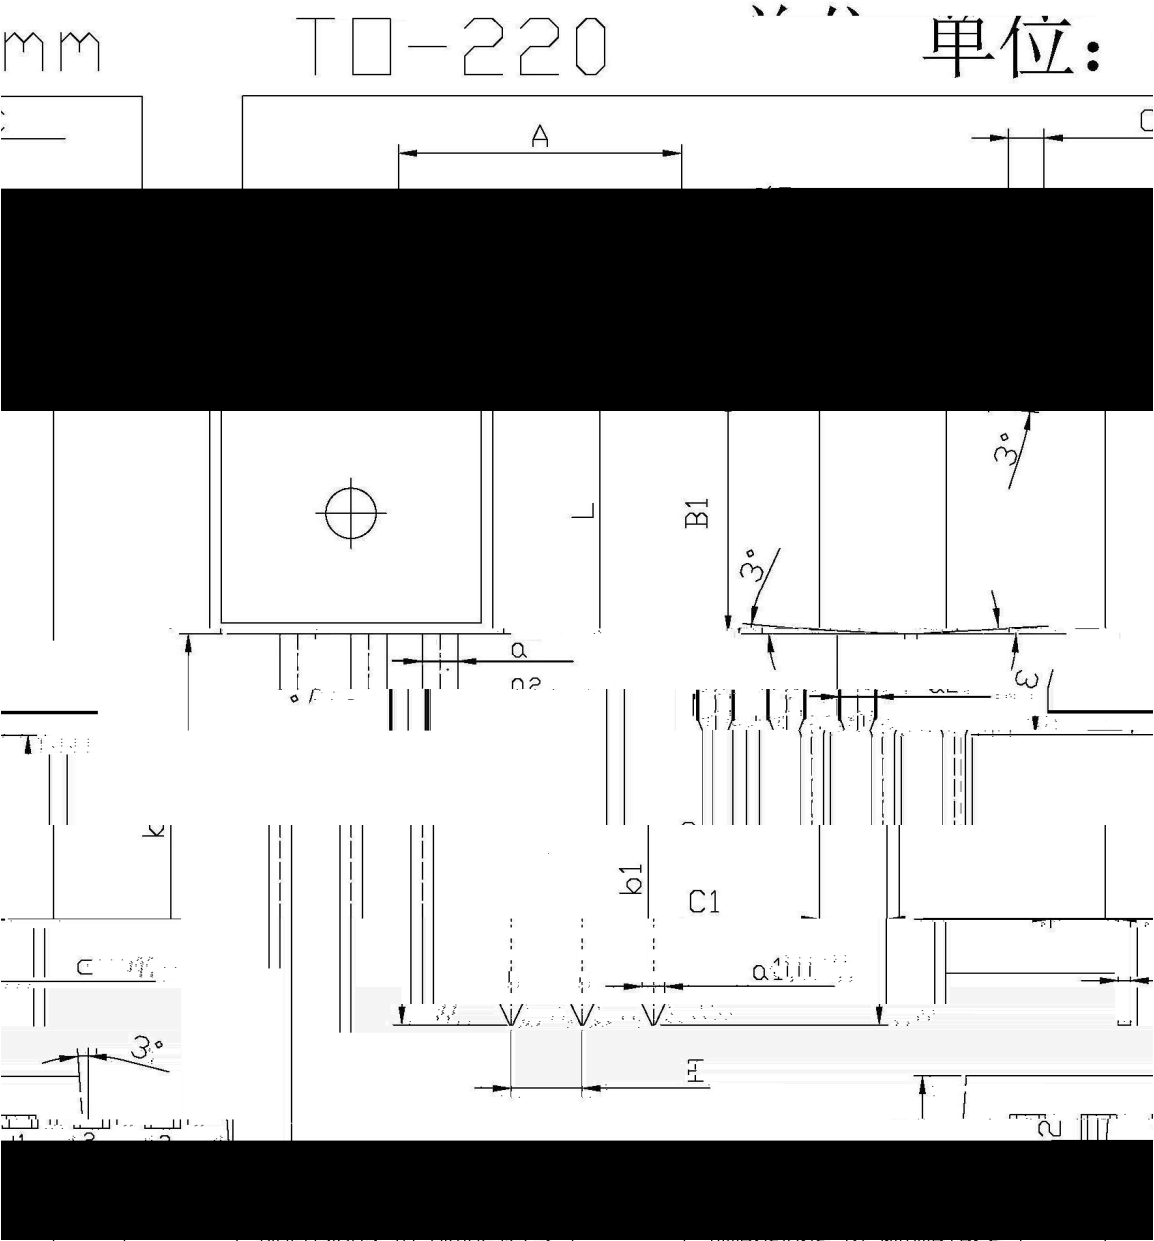


Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters	
	Min	Max		Min	Max
A	9.8	10.2	C	1.2	1.4
B1	3.56	3.64	C1	0.2	0.7
C	16.1	16.5	e	9.0	9.4
C1	13.6	14.0	h	1.1	1.5
e	10.5	10.9	b1	12.6	13.0
h	1.32	1.36	h1	9.6	10.0
a	2.74	2.78	a1	0.4	0.6
a1	1.53	1.57	c	1.2	1.4
c	1.45	1.49	c1	0.2	1.6

/ Marking Instructions

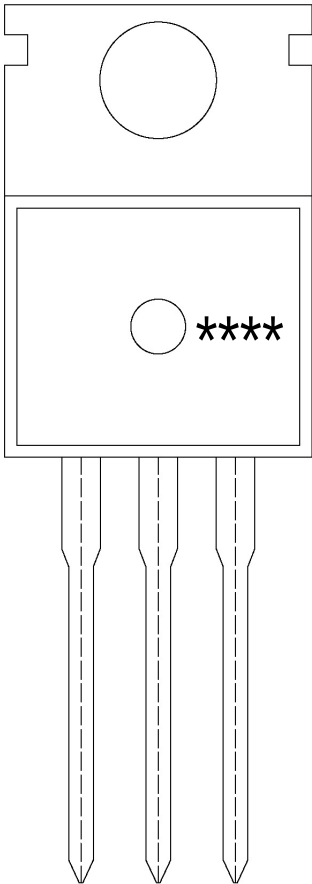

() / Temperature Profile for Dip Soldering(Pb-Free)

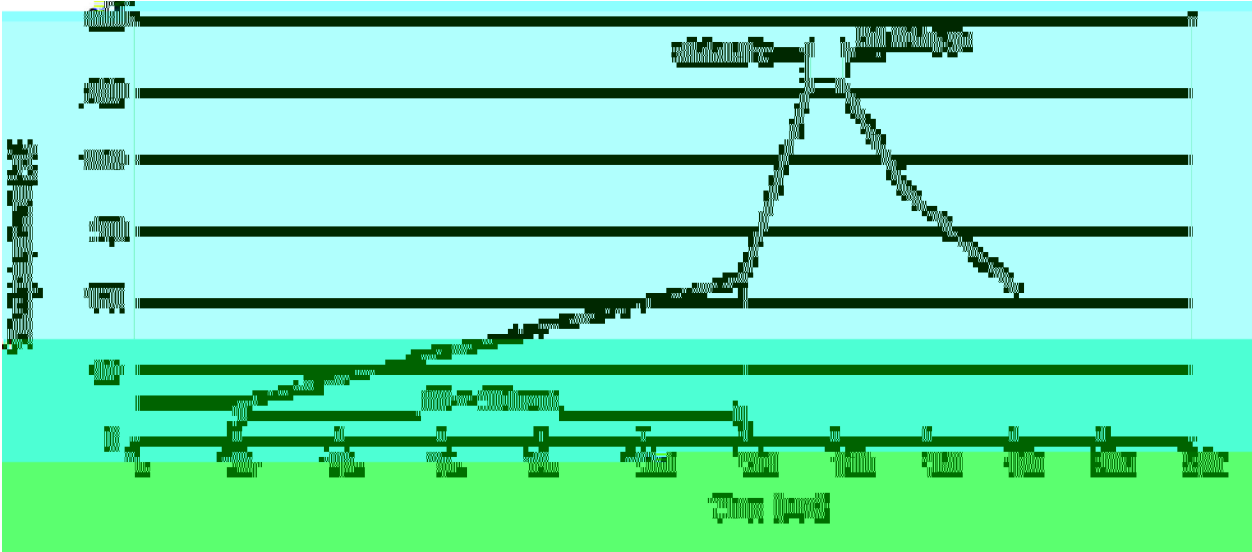

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices