

/ Descriptions

SOT-23

NPN


Silicon NPN transistor in a SOT-23 Plastic Package.

/ Features

Low current, high voltage.

/ Applications

Telephony and professional communication equipment.

/ Equivalent Circuit**/ Pinning**

PIN1 Base

PIN 2 Emitter

PIN 3 Collector




/ h_{FE} Classifications & Marking

h_{FE} Range	>50
Marking	H1V

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	300	V
Collector to Emitter Voltage	V_{CEO}	300	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	50	mA
Peak Collector Current - Continuous	I_{CM}	100	mA
Base Current	I_B	50	mA
Collector Power Dissipation	P_C	250	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=100\mu A$ $I_E=0$	300			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=1.0mA$ $I_B=0$	300			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=100\mu A$ I_C				


/ Electrical Characteristic Curve

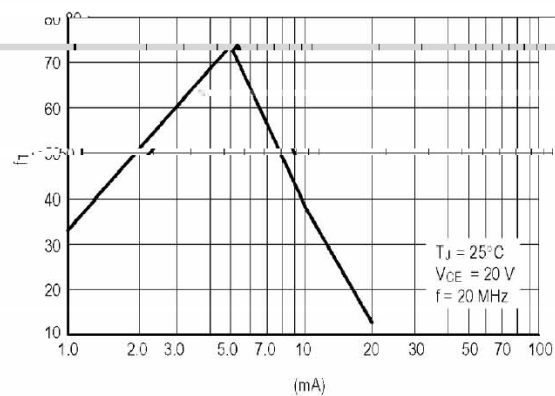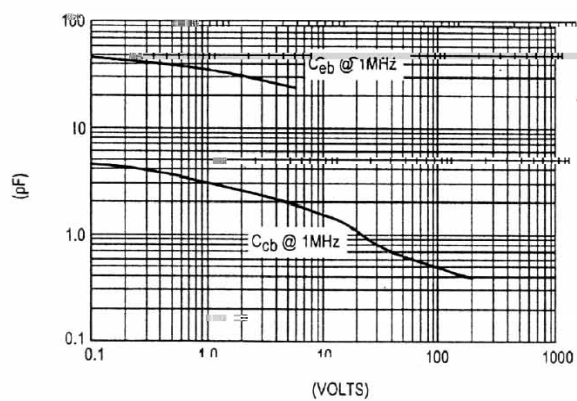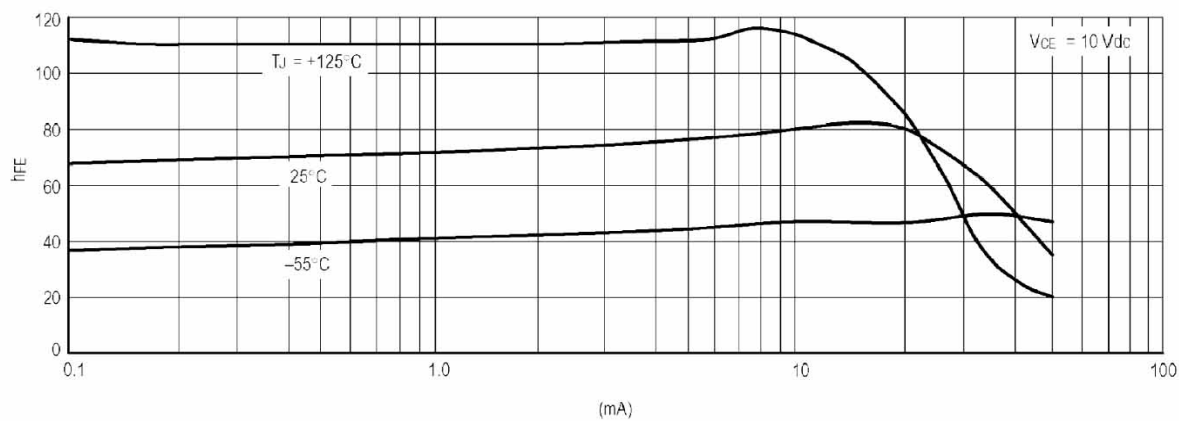

/ Package Dimensions


SOT-23

单位: mm

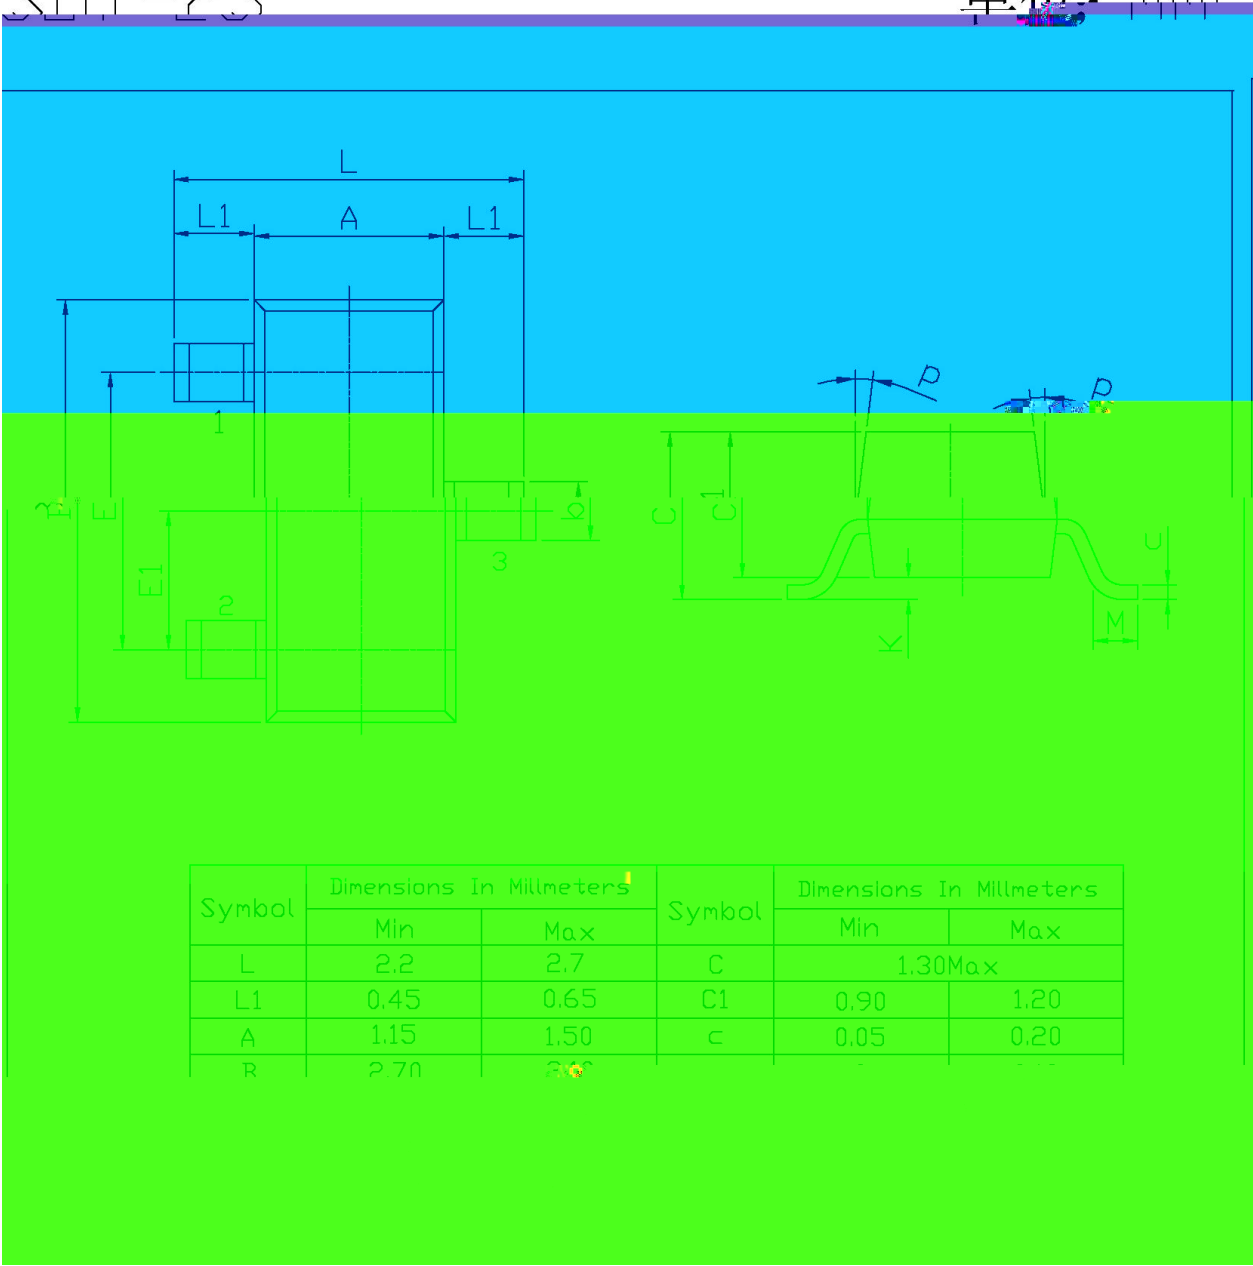

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
R	2.70	3.60			

/ Marking Instructions

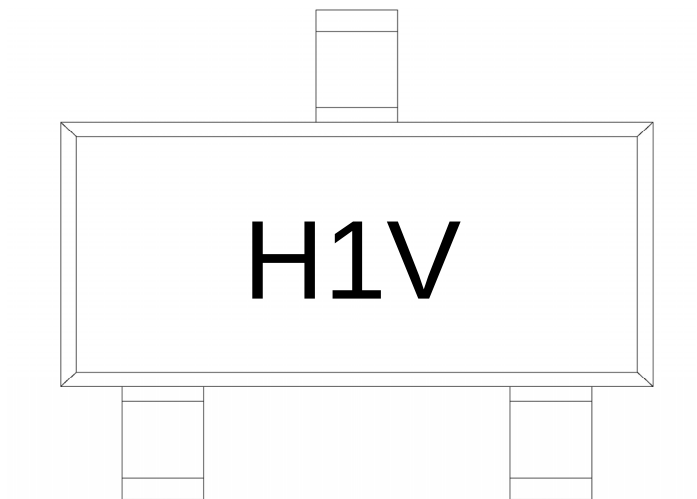

H

1V


Note:

H: Company Code.

1V: Product Type Code.



() /

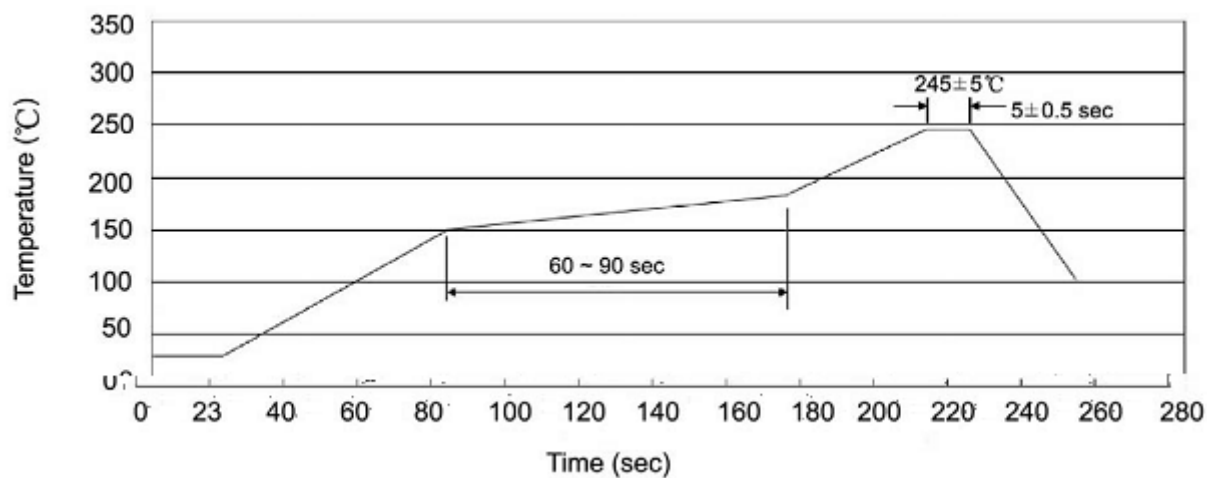

Note:

- | | | | | | |
|---|-------|-----|----|-----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ Notices