

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

BR2SD718B




DATA SHEET

/ Electrical Characteristic Curve

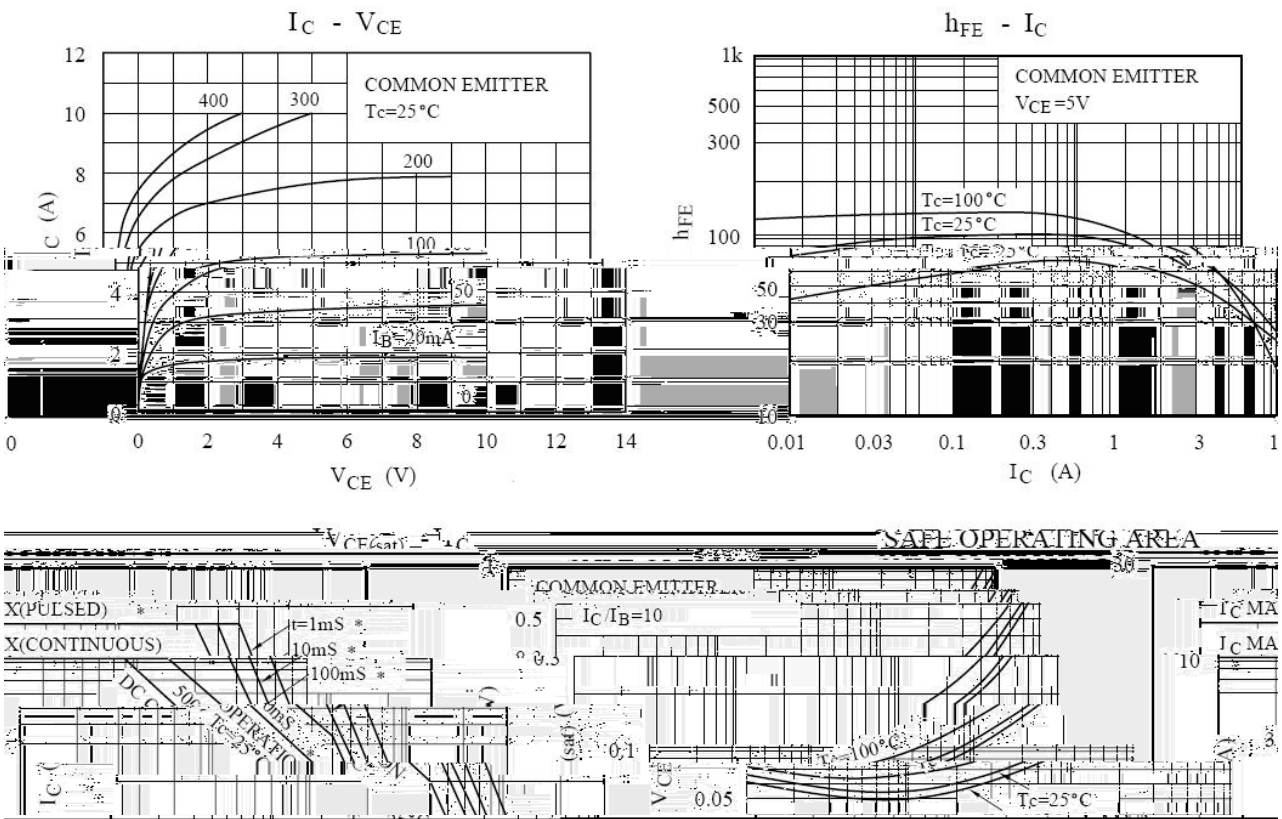


/ Package Dimensions

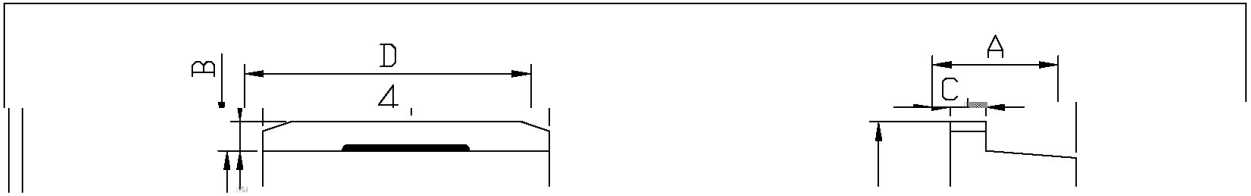


单位: mm							
	Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters		
		Min	Max		Min		Max
	A	4.30	4.70	E	9.00		9.40
	B	2.00	2.40	e1	2.34		2.74
	b	0.70	0.90	e2	4.88		5.28
0	b1	1.15	1.35	L1	15.00		16.0
4	b2	0.40	0.60	L2	2.24		2.8
0	C	1.20	1.40	L3	1.20		1.6
	D	9.80	10.20				

TD-263

/ Marking Instructions

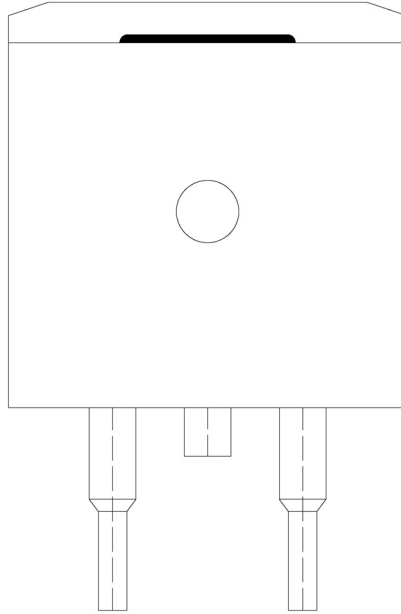

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

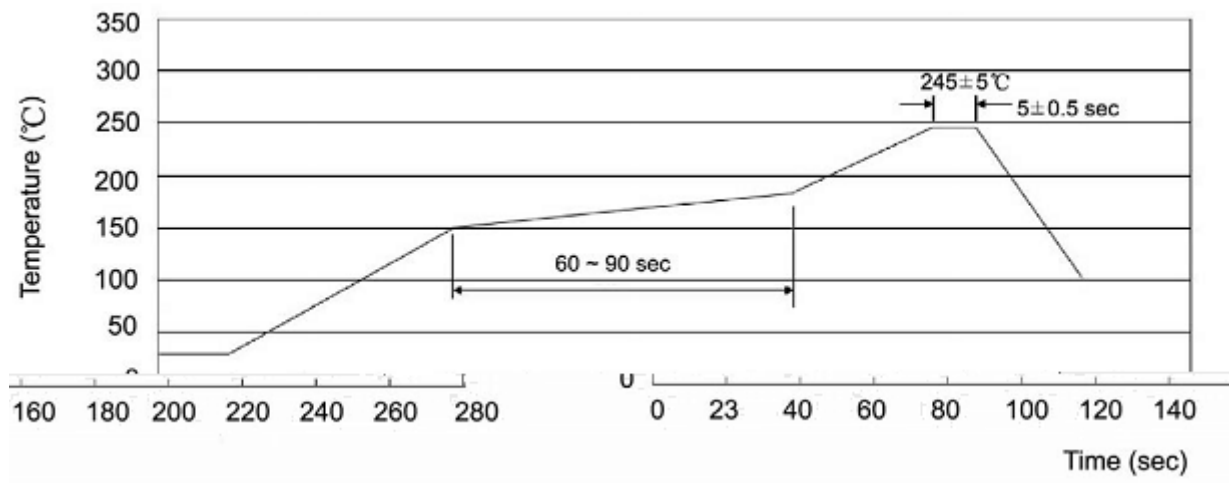

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices