

--	--	--	--	--	--

A 2019.11

BJT

VDD

CV/CC


Fb


PWM/PFM

Level6

Eur2.0

◆◆

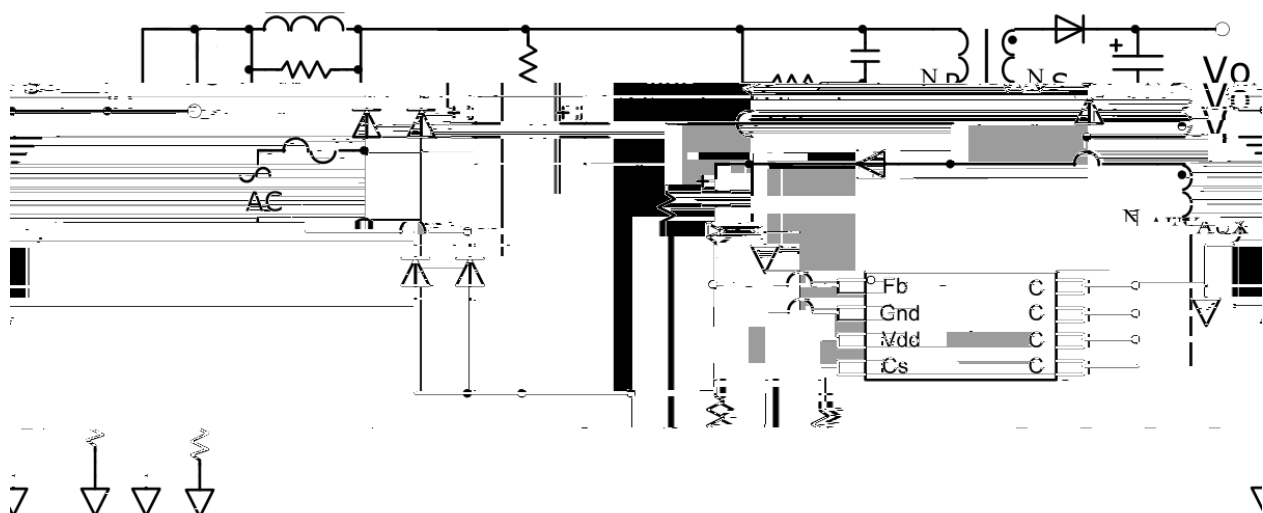



Rev.A Nov.-2019


	BJT VCBO	90~264V
BRAD6255ASC	700V	12W
BRAD6255BSC	700V	10W





1	Fb	
2	Gnd	
3	Vdd	
4	Cs	
5 6 7 8	C	BJT C



See Marking Instructions



Parameter	Symbol	Rating	Unit
Vdd	Vdd	-0.3~26	V
Fb	Fb	-0.3~6	V
CS	Cs	-0.3~6	V
C	C	450	V
10s	T _L	260	
	T _{opr}	-40~150	
	T _{stg}	-65~150	°C



Parameter	Symbol
-----------	--------

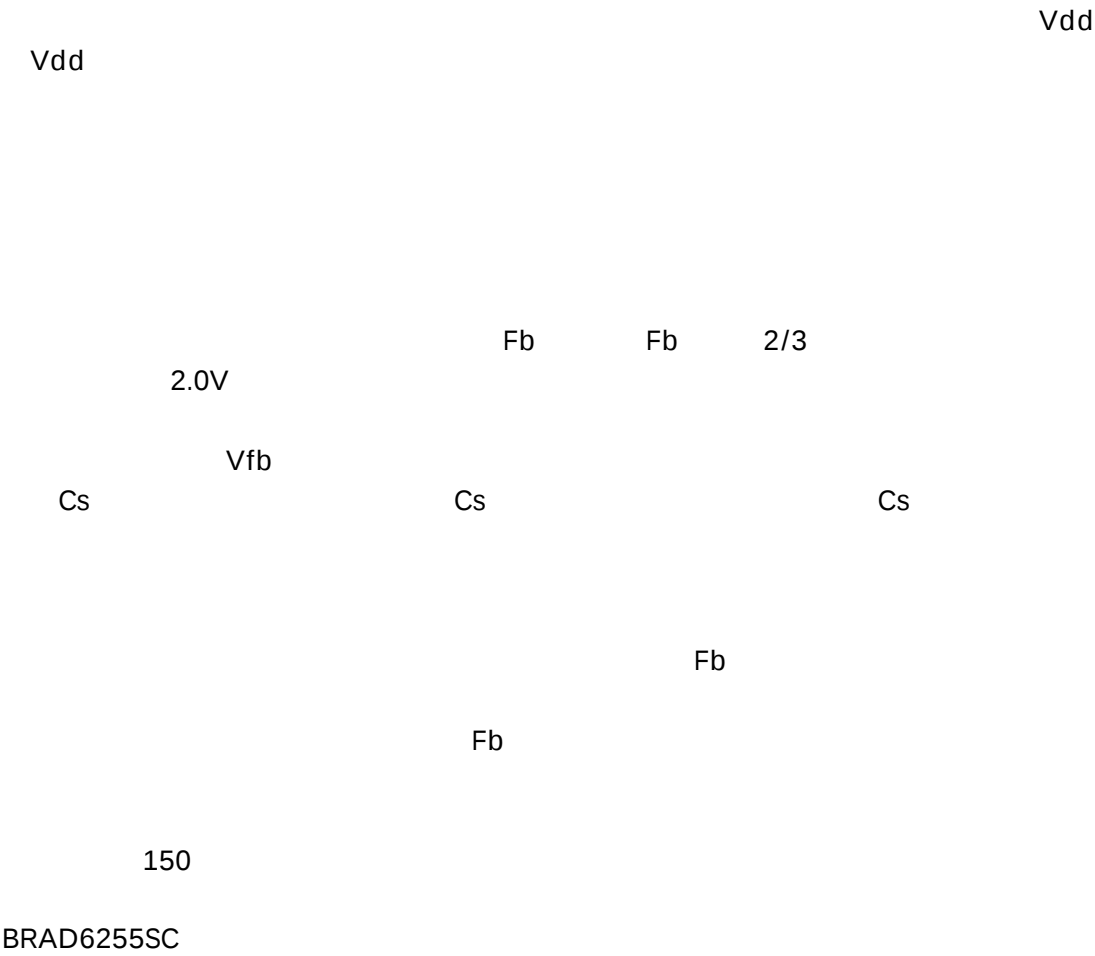

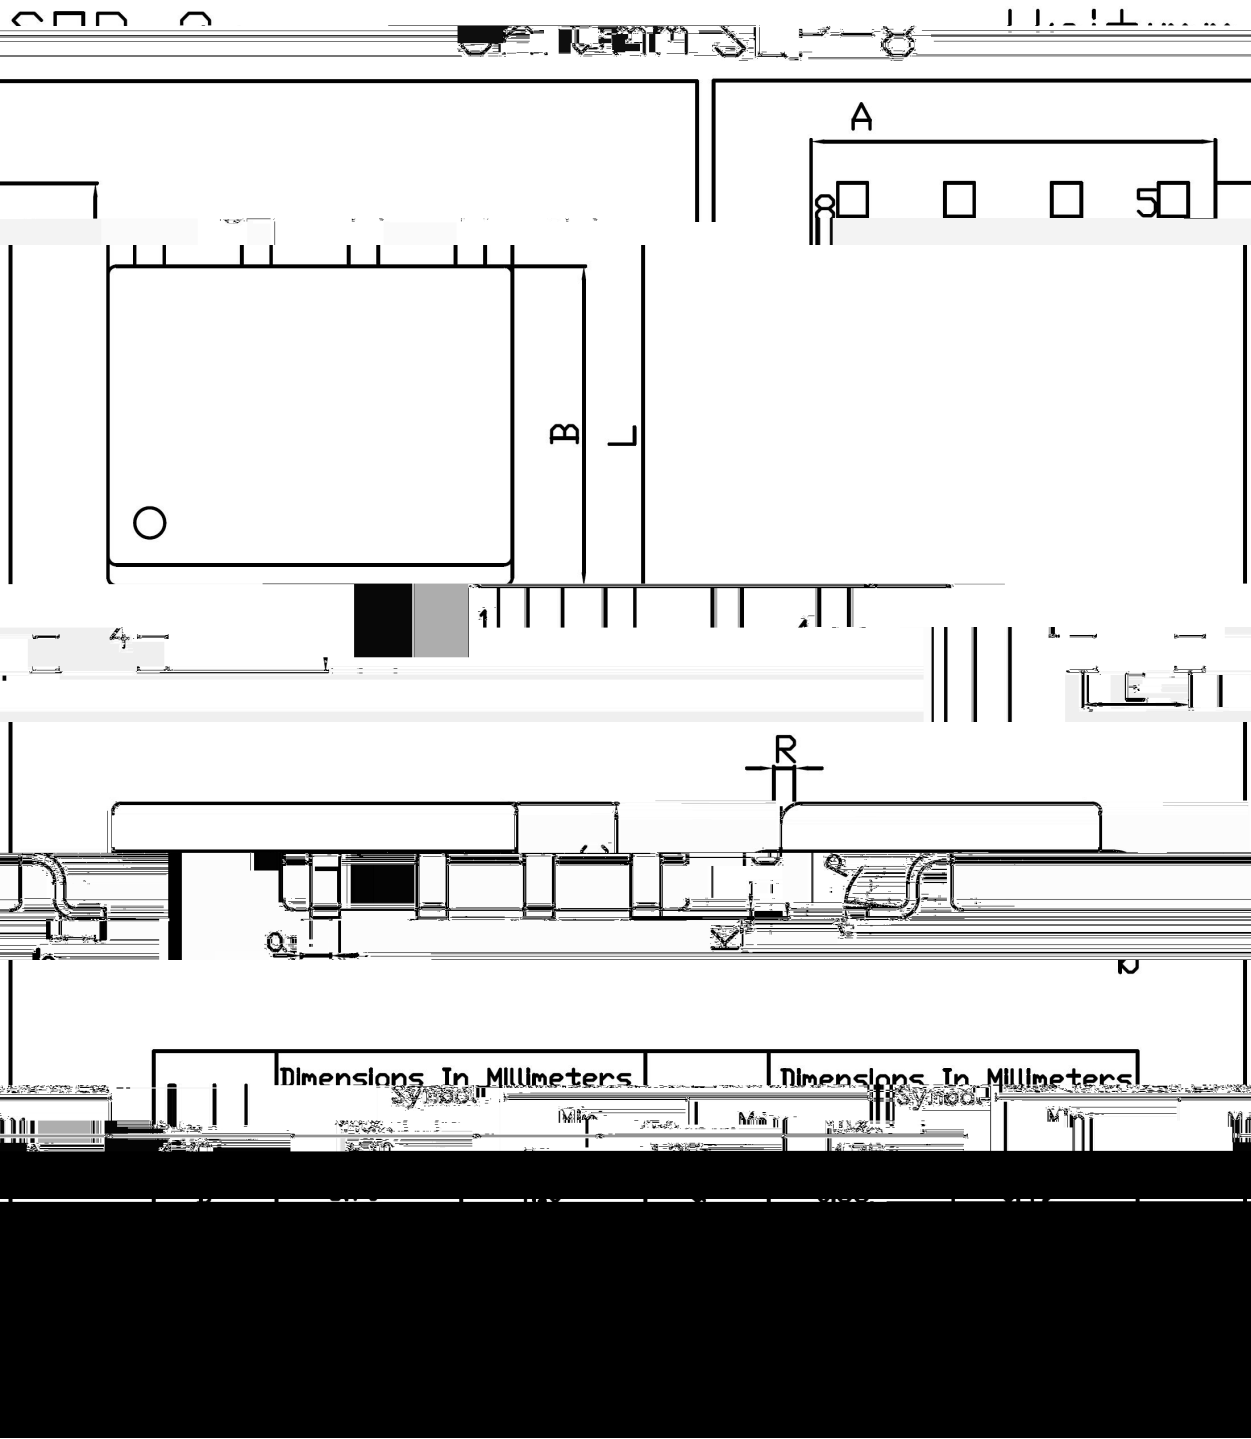


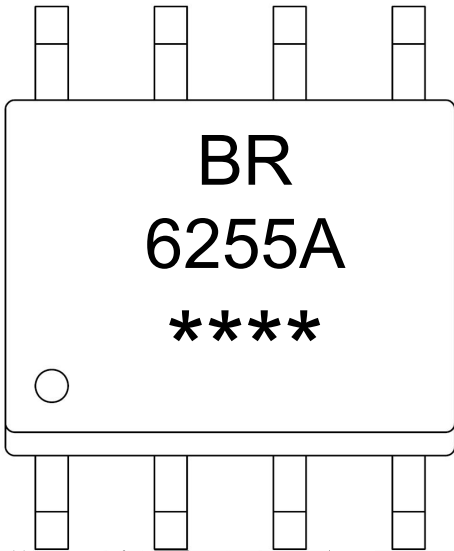

BR		
6255A	6255A	6255B

Note

BR	Company Code
6255A	Product Type 6255A or 6255B
****	Lot No.Code,code change with Lot No.

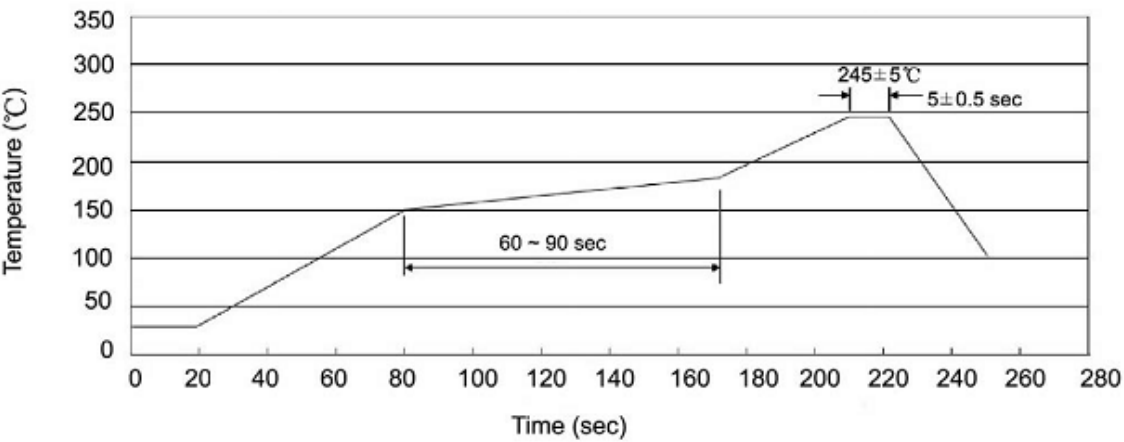

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260±5 10±1 sec. Temp.:260±5℃ Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm) Reel
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	