



BRAD66225SA

/ Typical Application Circuit

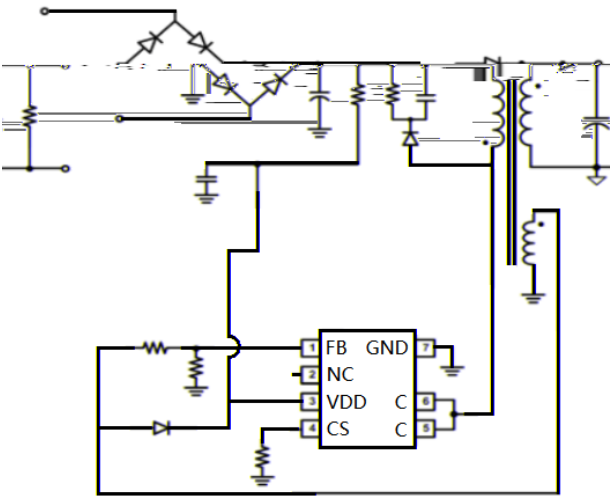


/ Pinning & Description

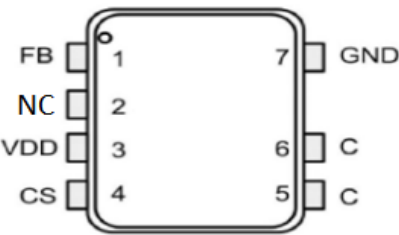

Pin Number	Pin Name	Description
1	FB	
2	NC	
	VDD	
	CS	
	C	BJT
	GND	

/ Block Diagram

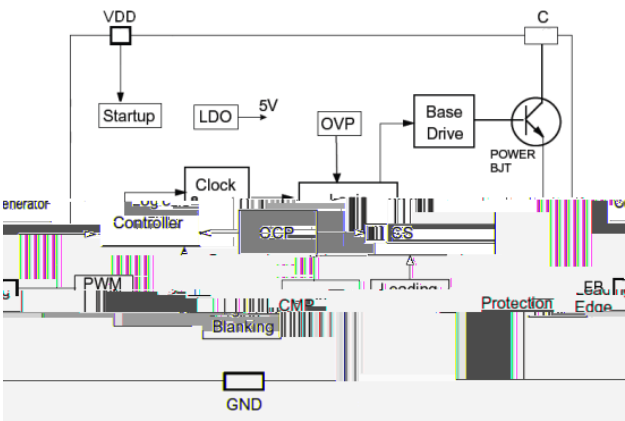

/ Absolute Maximum Ratings(Ta=25)

Parameter	Value	Unit
		℃
		℃
		℃
		℃
		℃

1


/ Electrical Characteristics(Ta=25 VDD=20V if not otherwise noted)

Supply Voltage Section(VDD Pin)						
		()				
Control Function Section (FB Pin)						


CPIN_{CS}max

Current Sense Input Section (CS Pin)						
Power BJT Section (C Pin)						


/ Functional Description

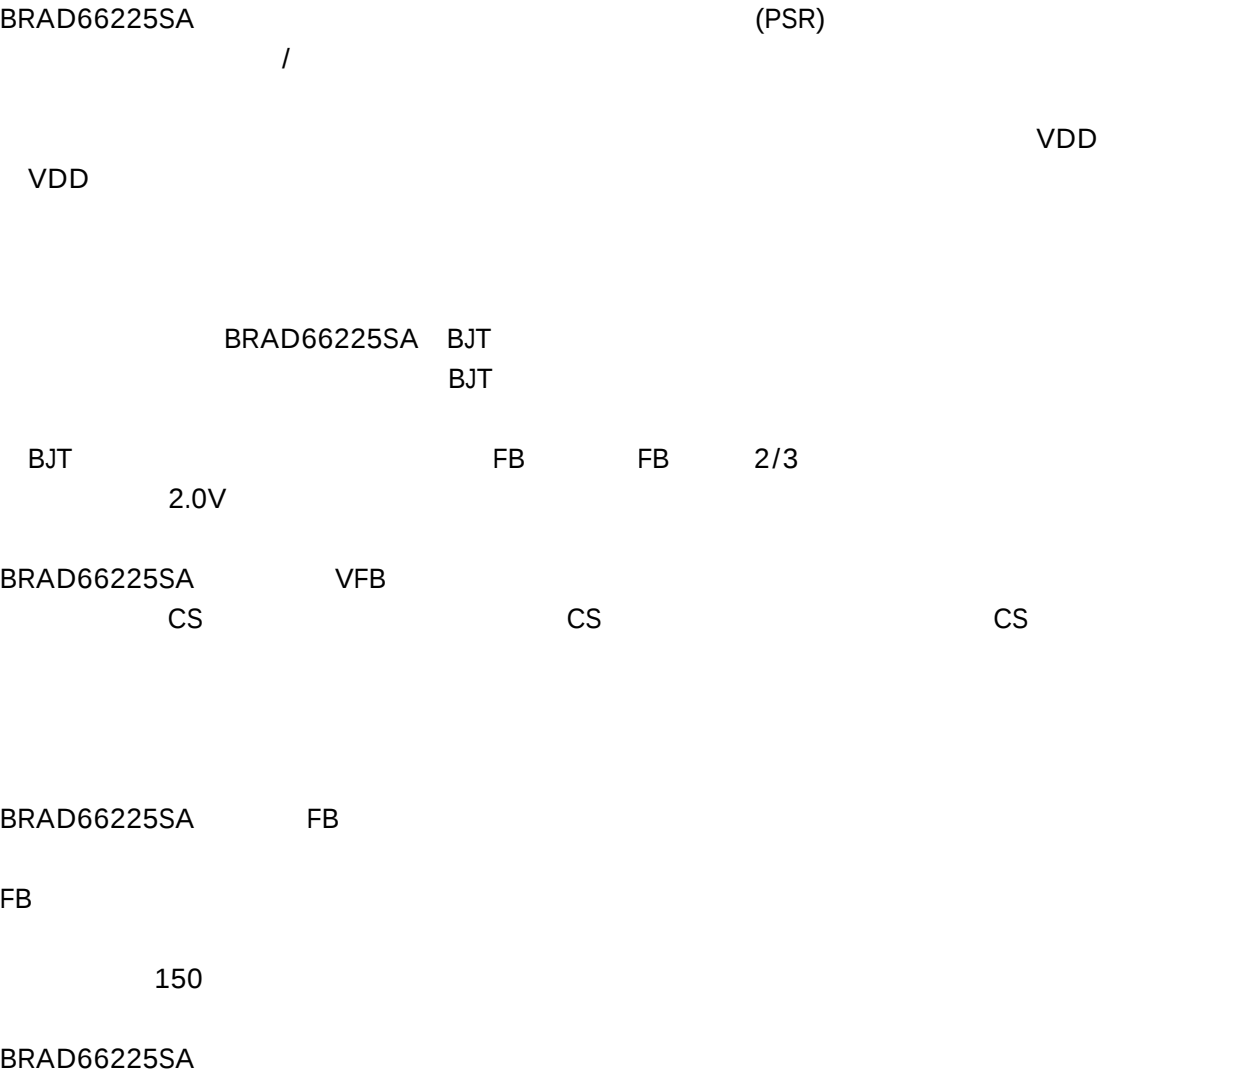

/ Package Dimensions

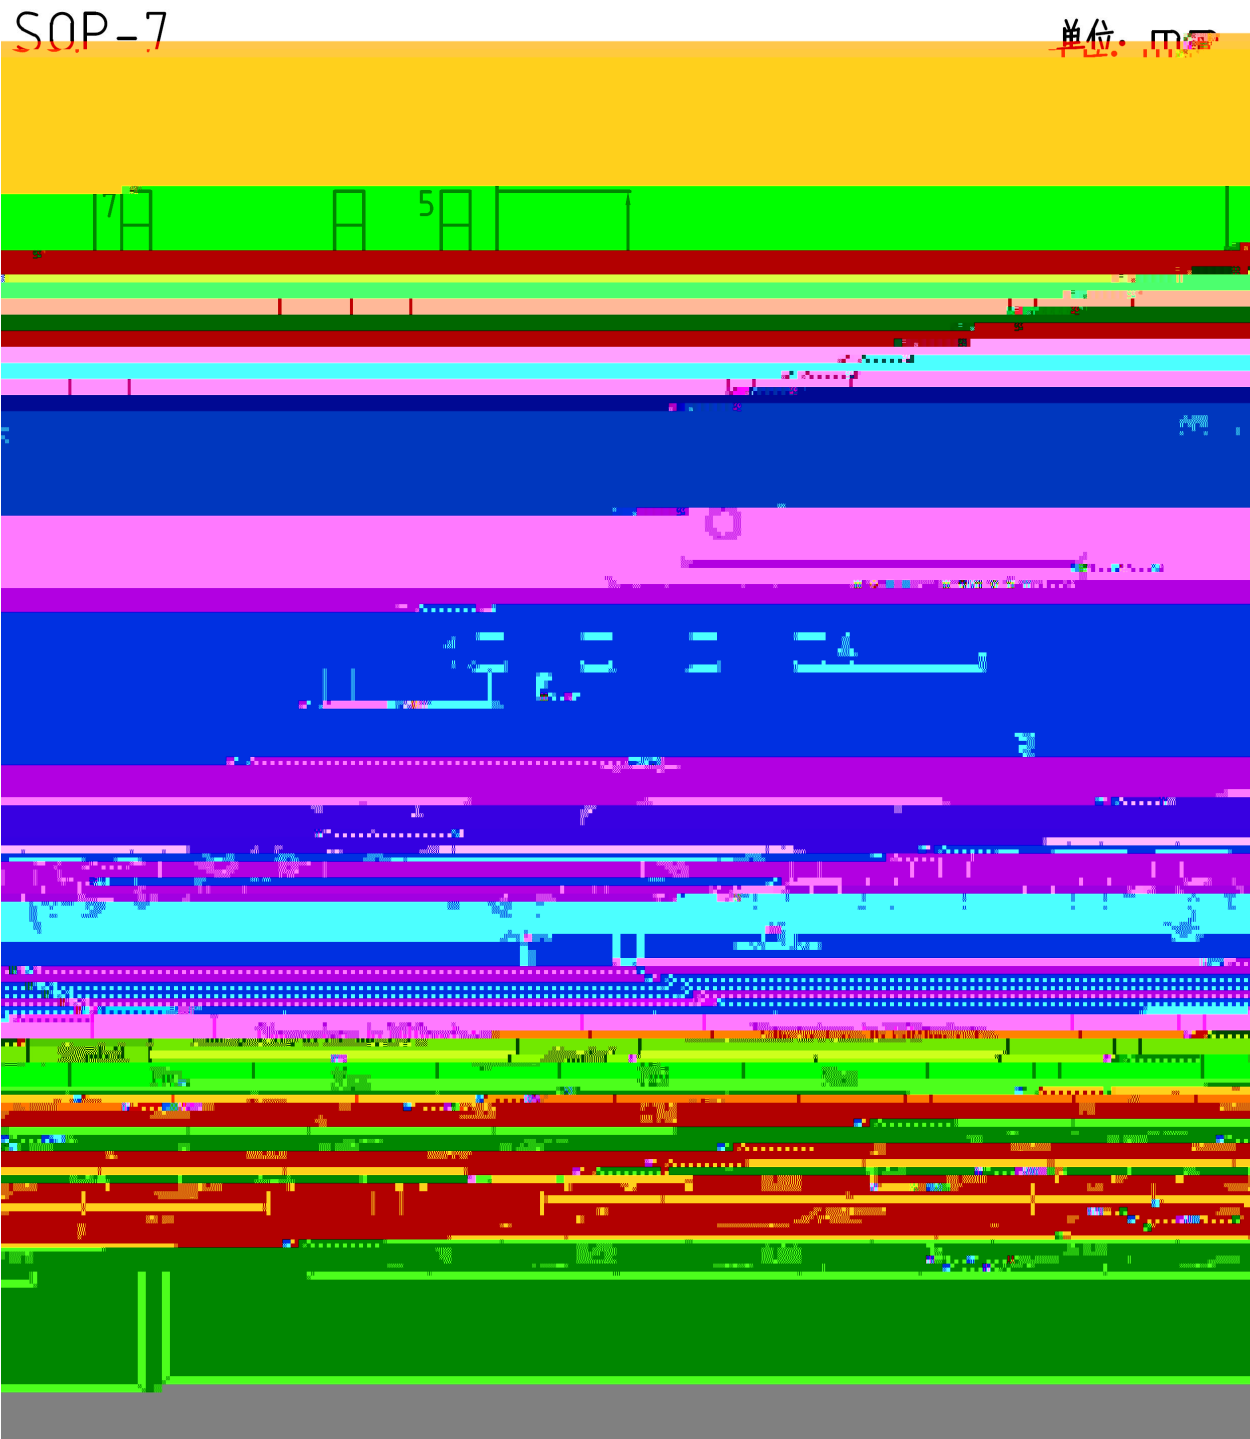

/ Marking Instructions

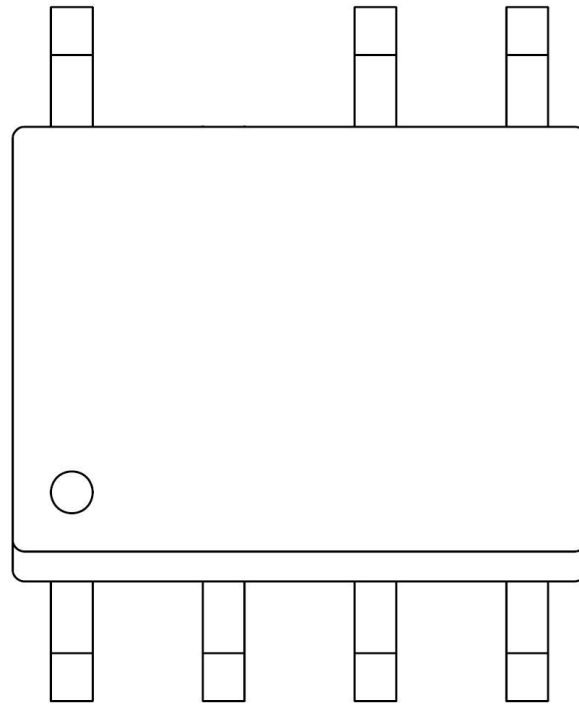


BR

66225C

66225D

66225E

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

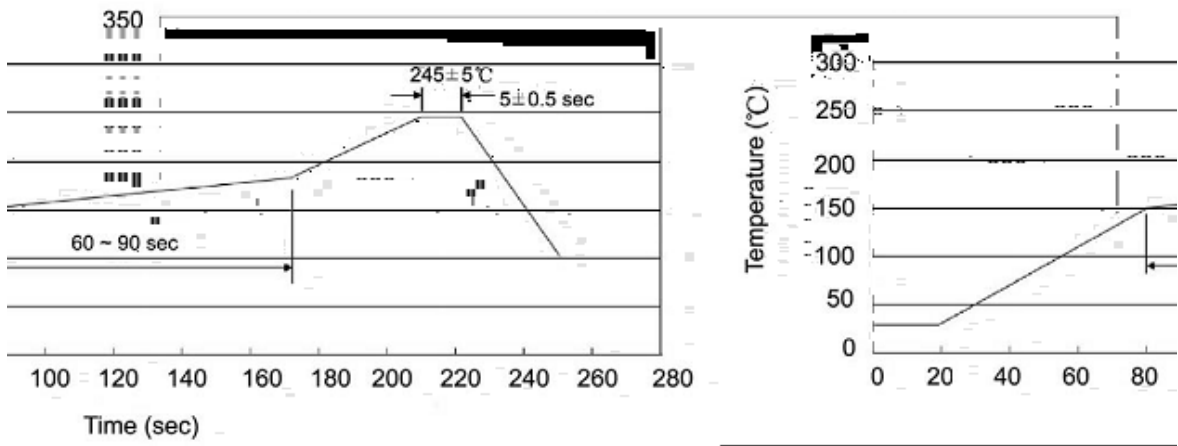

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
	4,000	2	8,000	6	48,000	13"		

/ Notices