


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking







/ Absolute Maximum Ratings(Ta=25)

	℃		
	℃		


/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω
		Ω				

/ Electrical Characteristic Curve

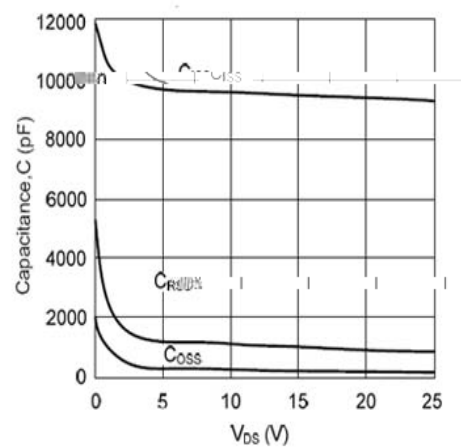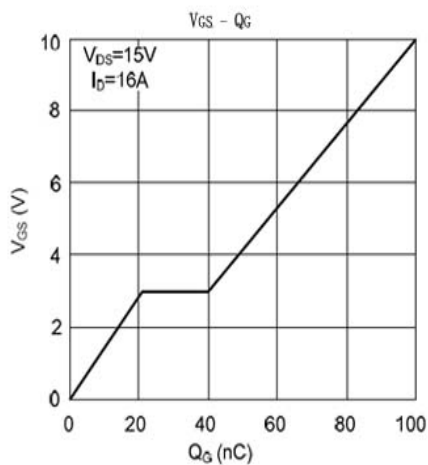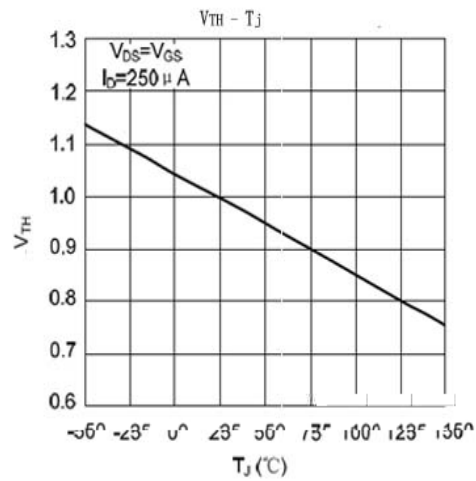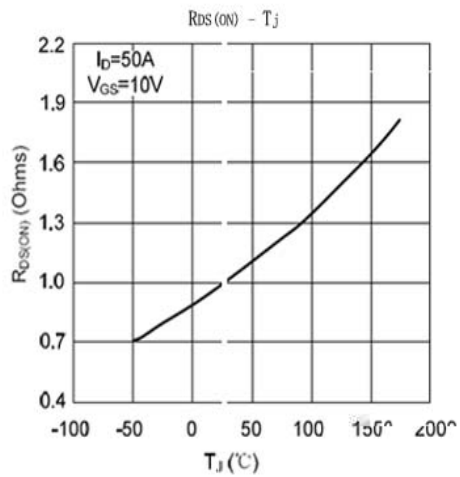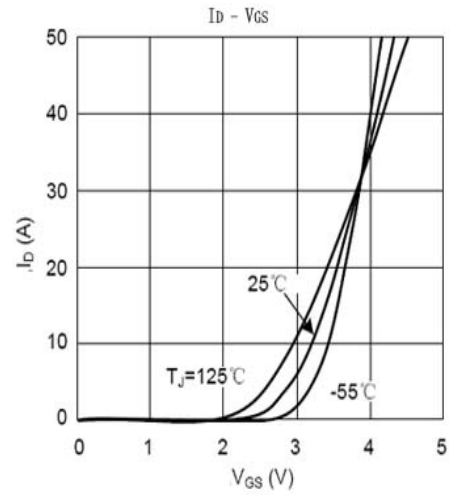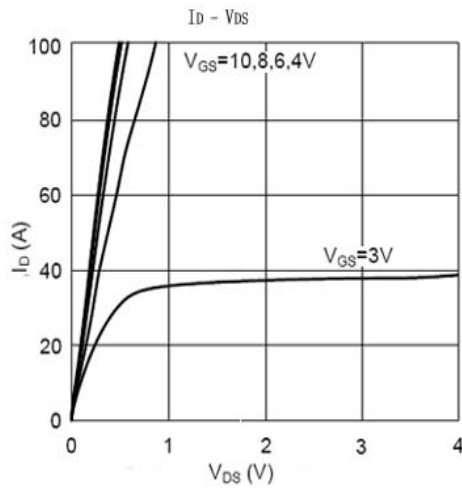


/ Package Dimensions

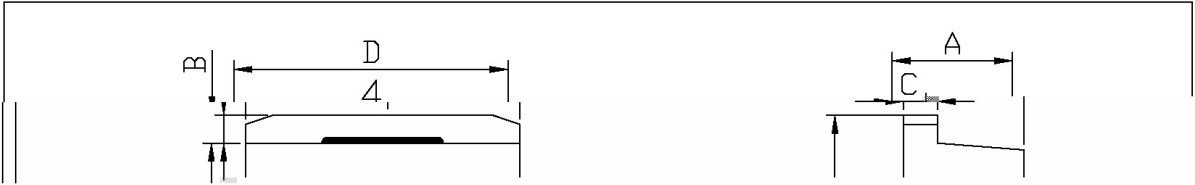

单位: mm						
Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters		
	Min	Max		Min	Max	
A	4.30	4.70	E _L	0.00	0.10	
B	1.00	1.40	e _L	2.24	2.74	
b ₁	0.70	0.90	e ₂	4.88	5.28	
b ₂	1.15	1.35	L ₁	15.00	16.00	
b ₃	0.40	0.60	L ₂	2.24	2.74	
C	1.20	1.40	L ₃	1.20	1.60	
D	9.80	10.20				

TP-263

/ Marking Instructions

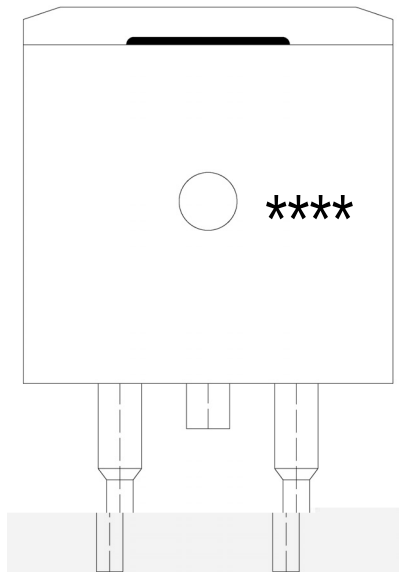

() / Temperature Profile for Dip Soldering(Pb-Free)

