

/ Descriptions


/ Features

- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆

/ Applications


- ◆
- ◆
- ◆

/ Application Circuit

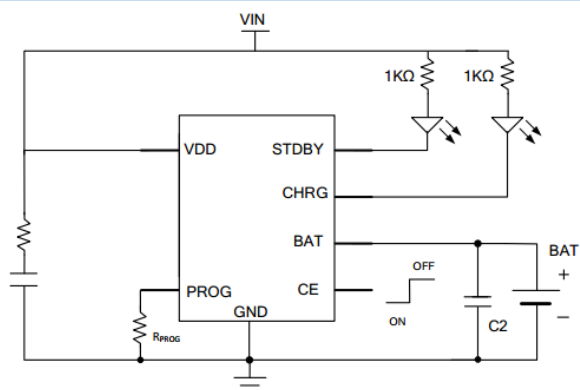

注 1: 建议取值 (C1/C2 为 1—10uF)

/ Pinning

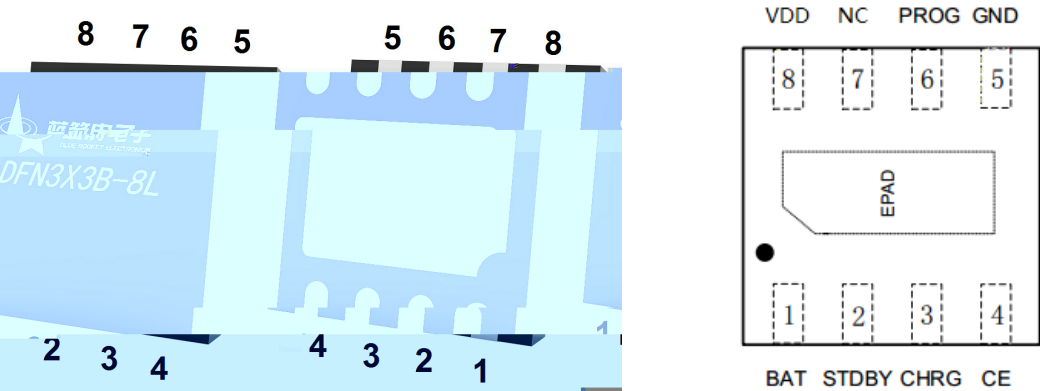


PIN Num.	Symbol	Function
	SUR J	

/ Absolute Maximum Ratings(Ta=25)

PARAMETER	SYMBOL	RATINGS	UNITS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
	Δ					
V _{CC} Under voltage	Δ					

/ Principle block diagram

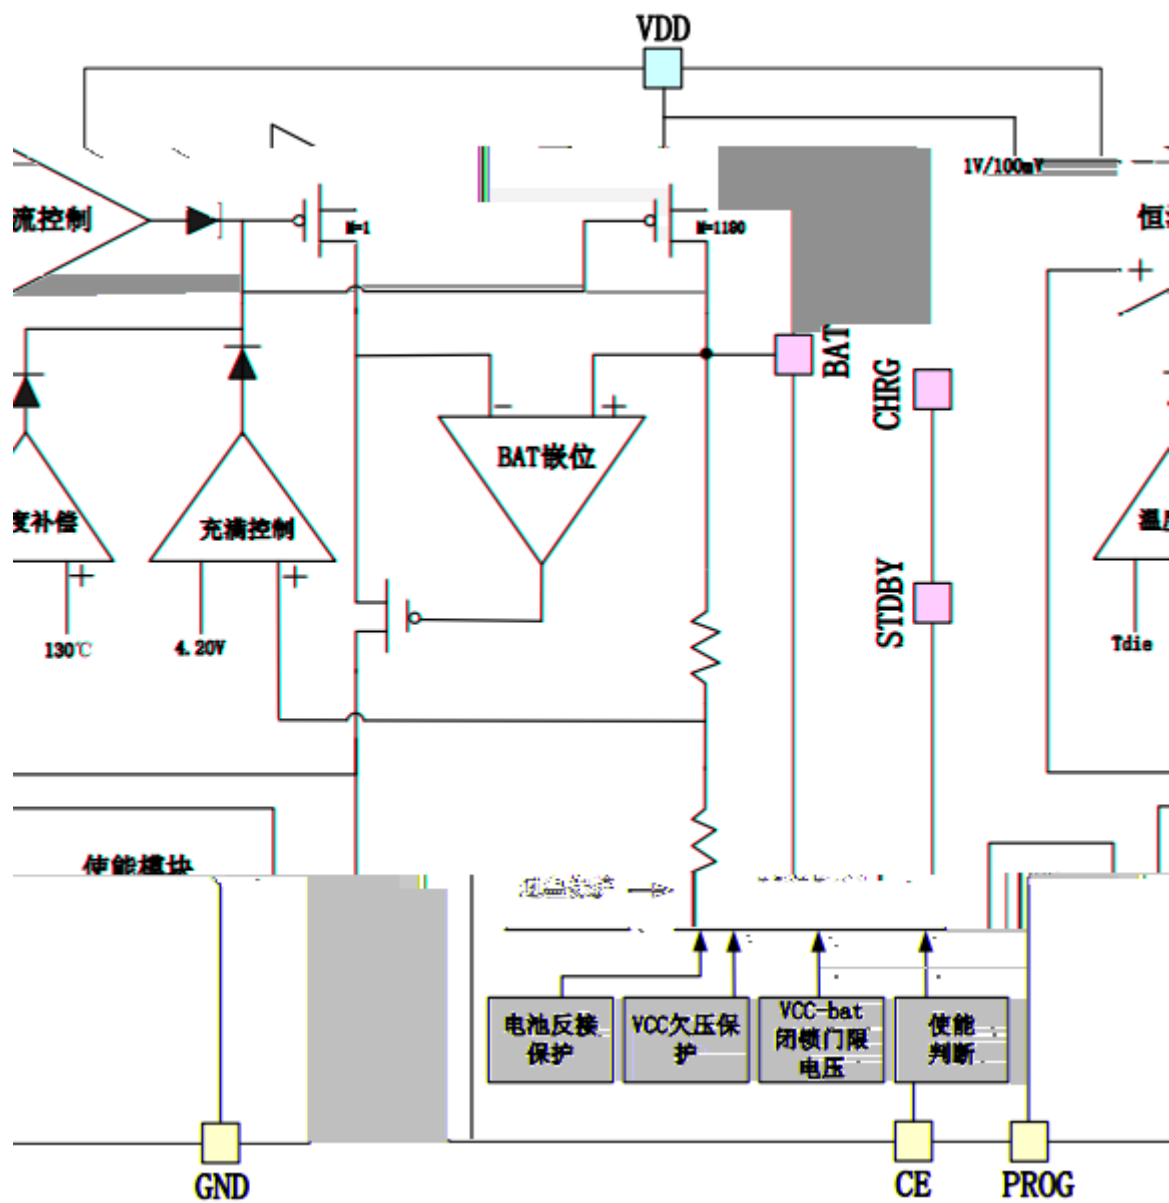

/ Function description

◆

◆

Ω

◆

◆

/ Function description


◆

3/8


◆

◆

/ Package Dimensions

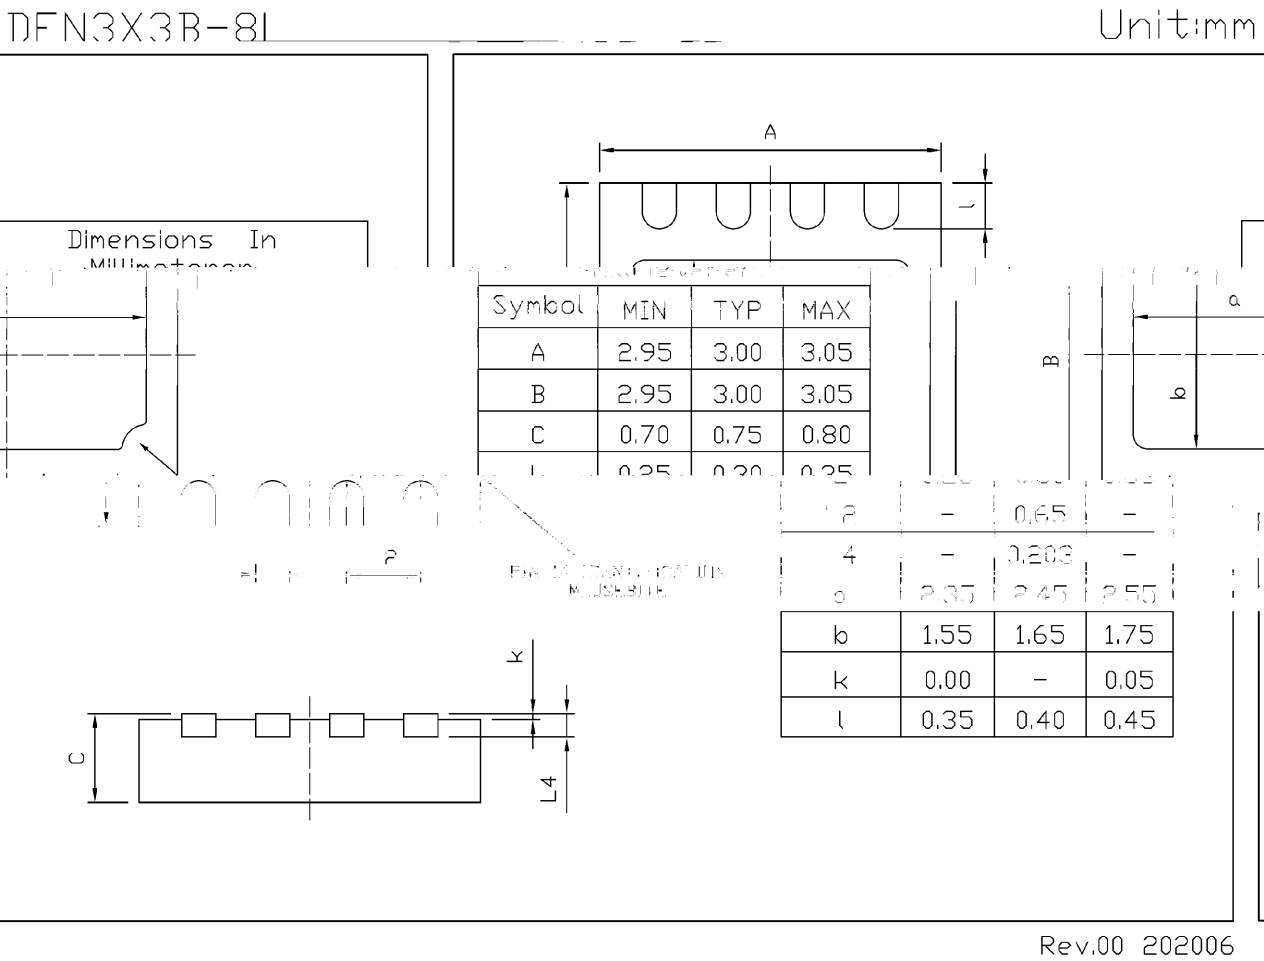


/ Marking Instructions



738;I

() /

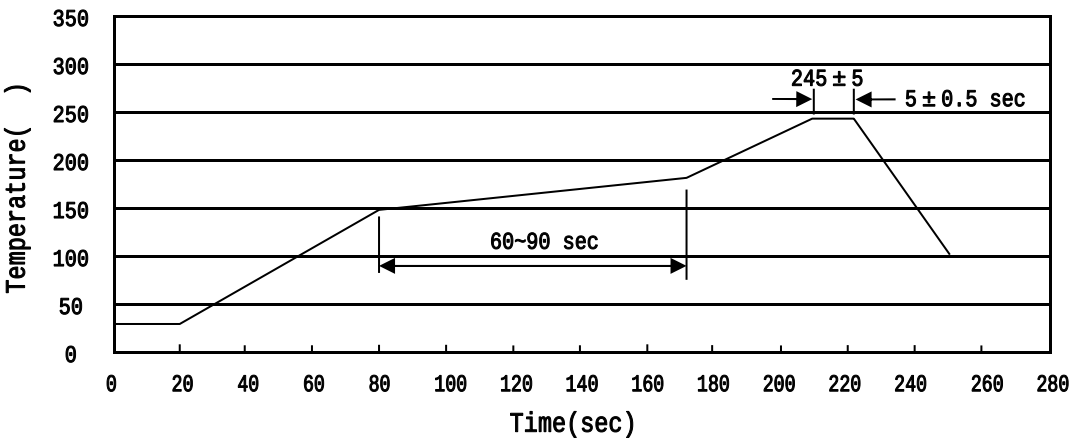

$\frac{3}{8}$ $\frac{3}{8}$
 $2 \frac{3}{8}$ 2 $2 \frac{3}{8}$ 2
 $\frac{3}{8}$ $\frac{3}{8}$

/ Resistance to Soldering Heat Test Conditions

$2 \frac{3}{8}$ 2 $2 \frac{3}{8}$ 2

/ Packaging SPEC.

/ Notices