

A	2022.6.22	ALL	AOS-AOD32326		








N MOS


VDS (V) = 30V
ID =67A (VGS = ±20V)
RDS(ON)@10V≤6mR
HF Product.

DC/DC

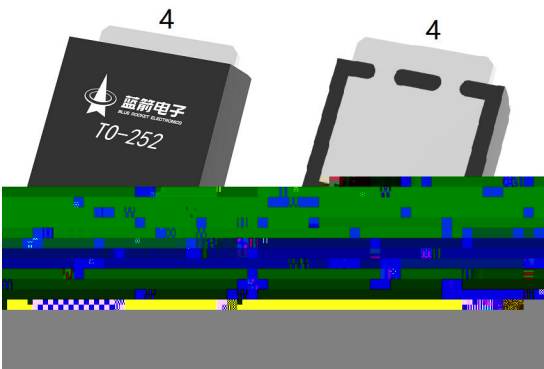



		°C		
		°C		
				°C
	≧			°C











--	--	--	--	--	--	--









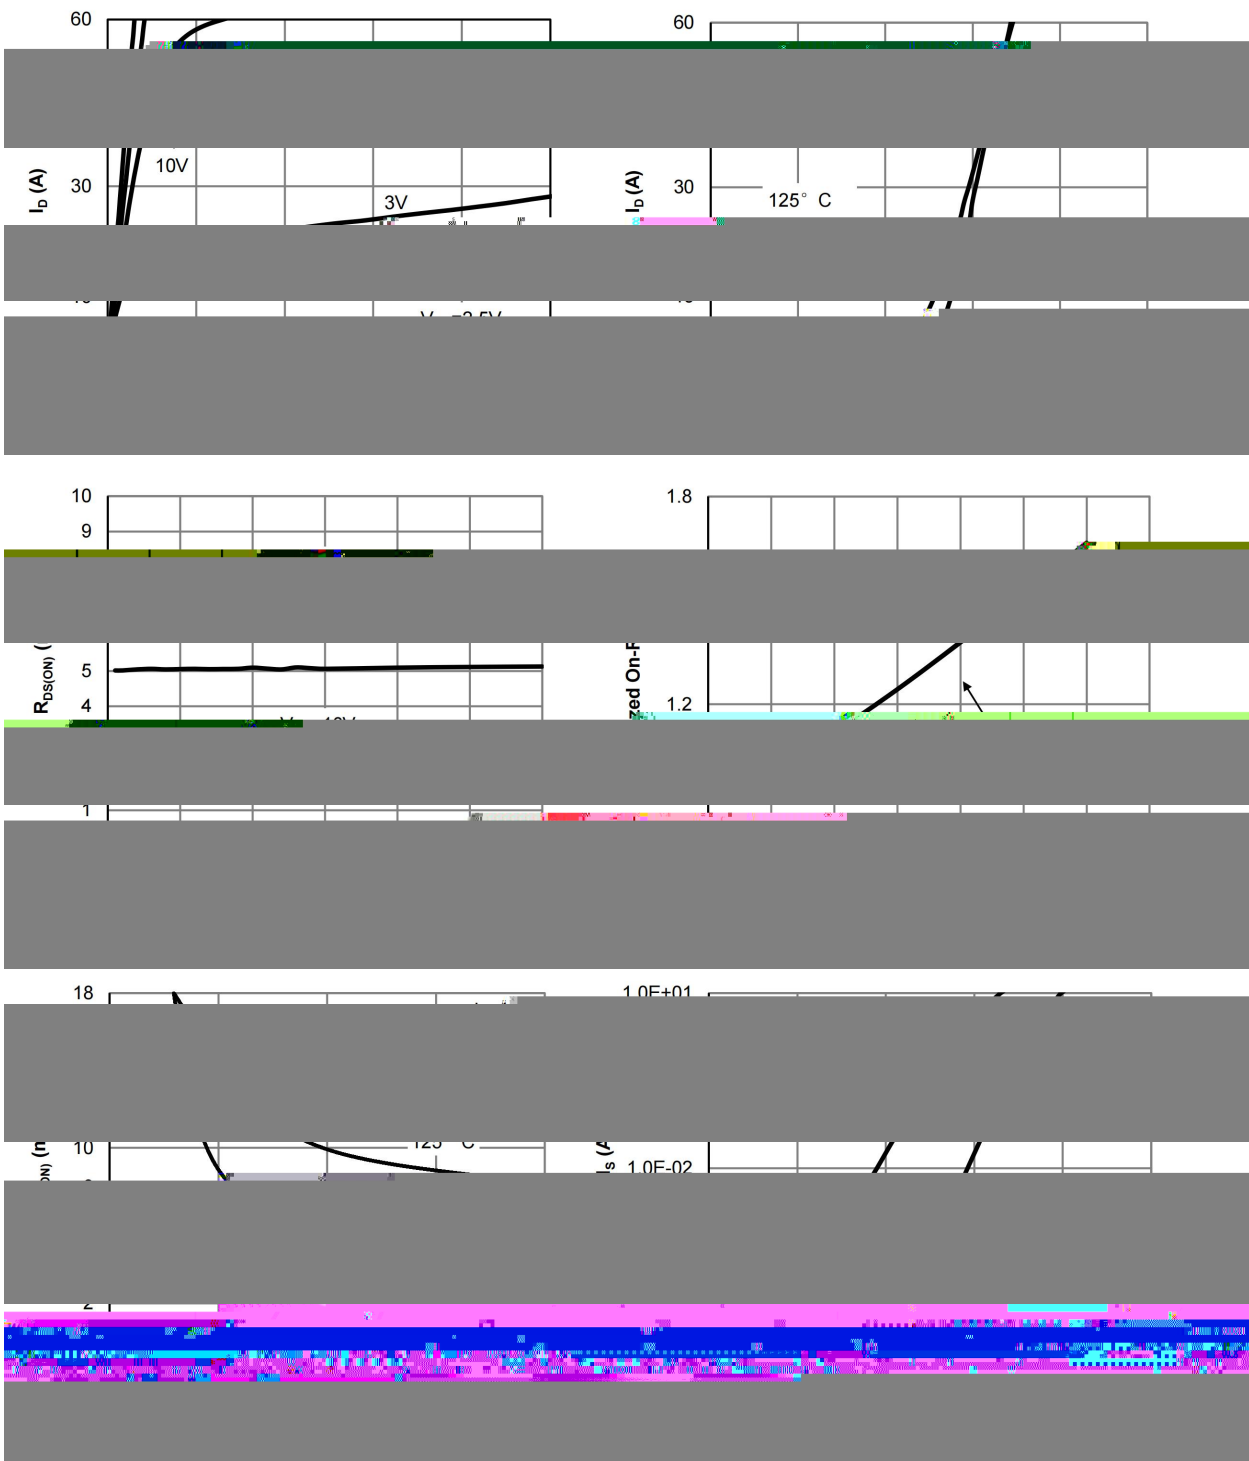


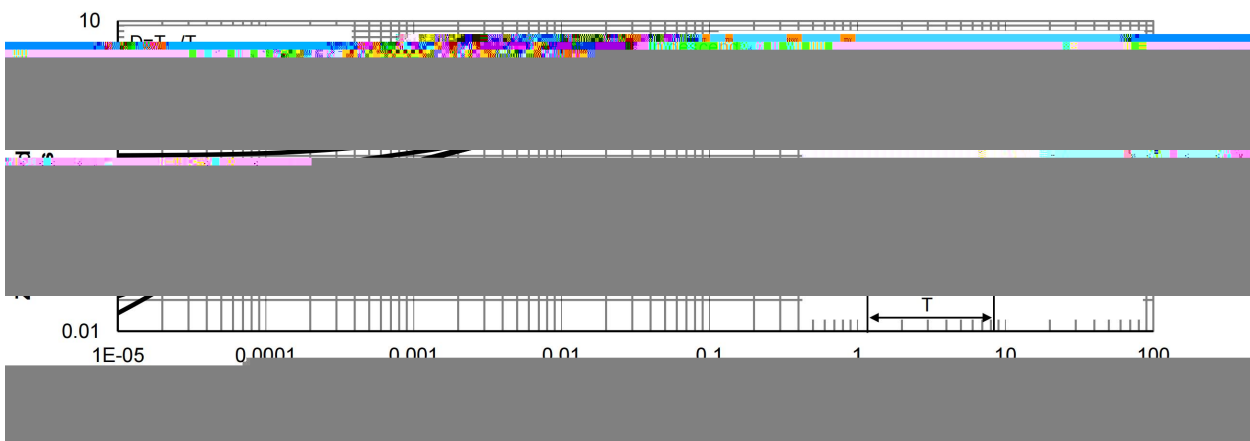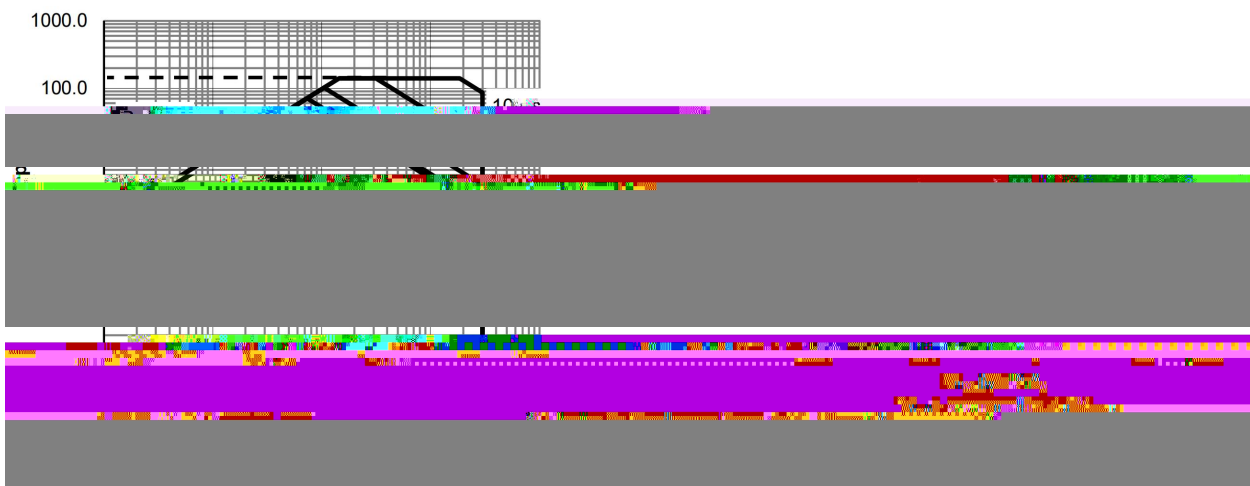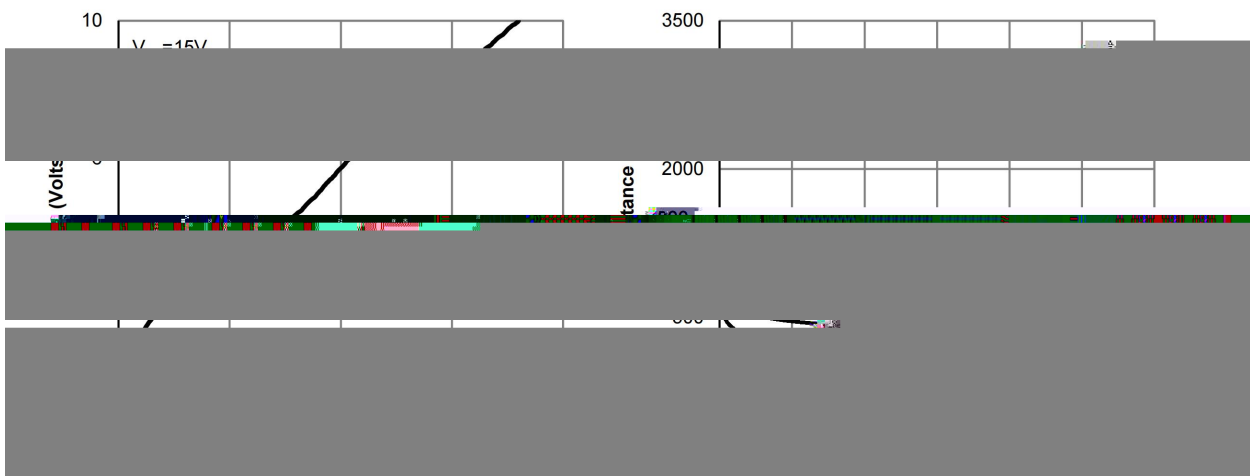




Dimensions In Millimeters				Dimensions In Millimeters					
Min.		Max.		Symbol	Min.		Max.		Symbol
5.95	6.25				2.20	2.40			
2.24	2.34			B	0.95	1.25			6D
4.43	4.73			b	0.70	0.90			6E
9.85	10.35			61	0.45	0.55			L1
1.70		2.00		C	0.45		0.55		L2
6.75	L3	0.60	0.90		D		6.45		
5.40	5.70	0.40	0.60	0.30	0.40	0.50	0.60		


TN-252



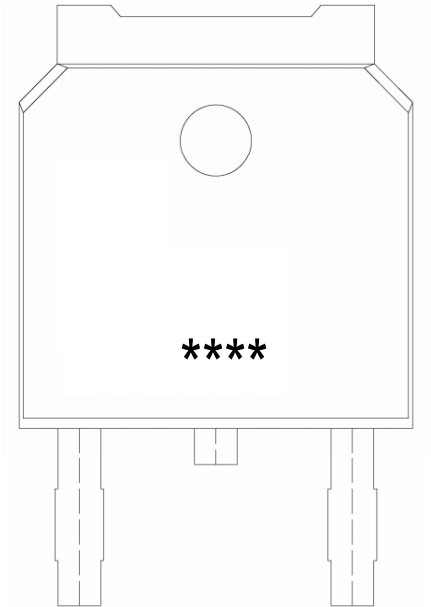

060N03



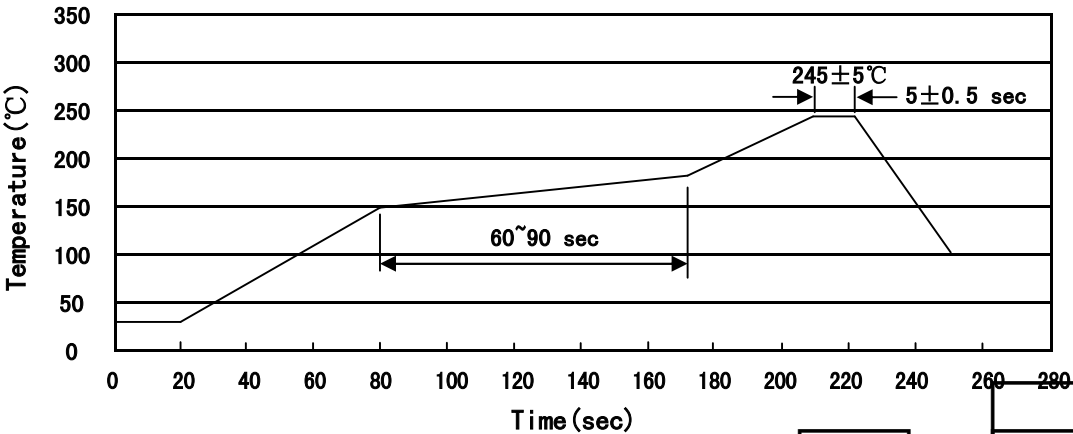

±

°C

±

°C

±

°C

± °C

±

°C

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

