

5 é / Descriptions

:5 .> / / x Õ € ı E , ≥ }foû


¤ ª / Features

z ı , >ou3i Ü © Éou z ' y 9 èou8U.9 D }ou


Đ ÷ / Applications

" J ouò J » ouò MCäou ç õou

Ã W] Ô · / Equivalent Circuit



• Û - æ / Pinning

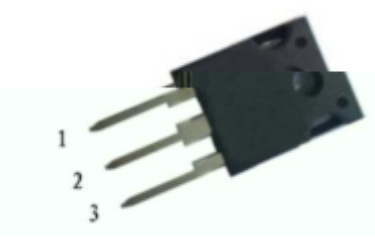

y

y

y

Z Ü B , M V / h_{FE} Classifications & Marking

- ~ ™ ¢ou

Absolute Maximum Ratings(Ta=25 ;)


@ É	Ö Z	É ð	% y
			-

Electrical Characteristics(Ta=25 ;)


@ É	Ö Z	y ° / ^	¬ 4	õ i j õ ¬ >	õ % y
	»				
	»				
		-			
		Ø -			

@ É	Ö Z	y ° / ^	¬ 4	õ ¡ ∫	ö ¬ >	õ % y


Electrical Characteristic Curve

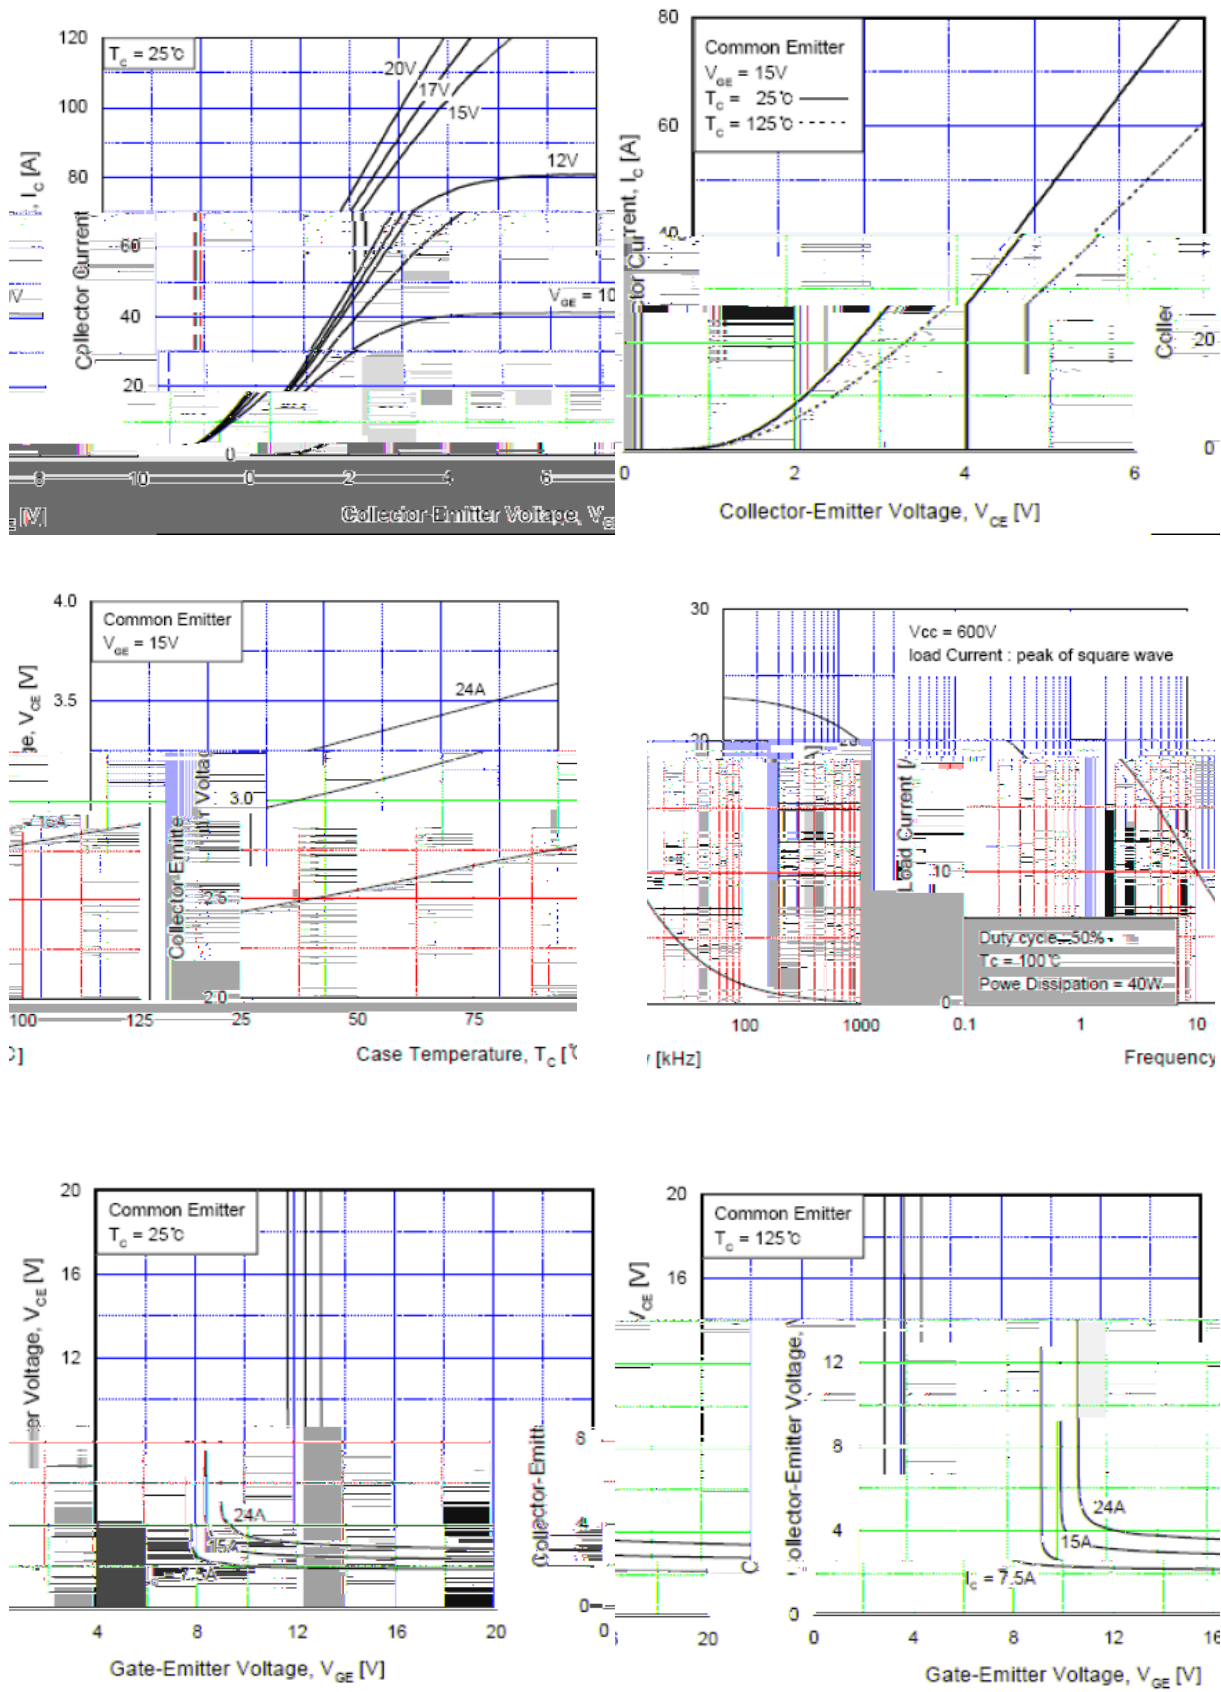

〇 ? d • Ž ċ / Electrical Characteristic Curve

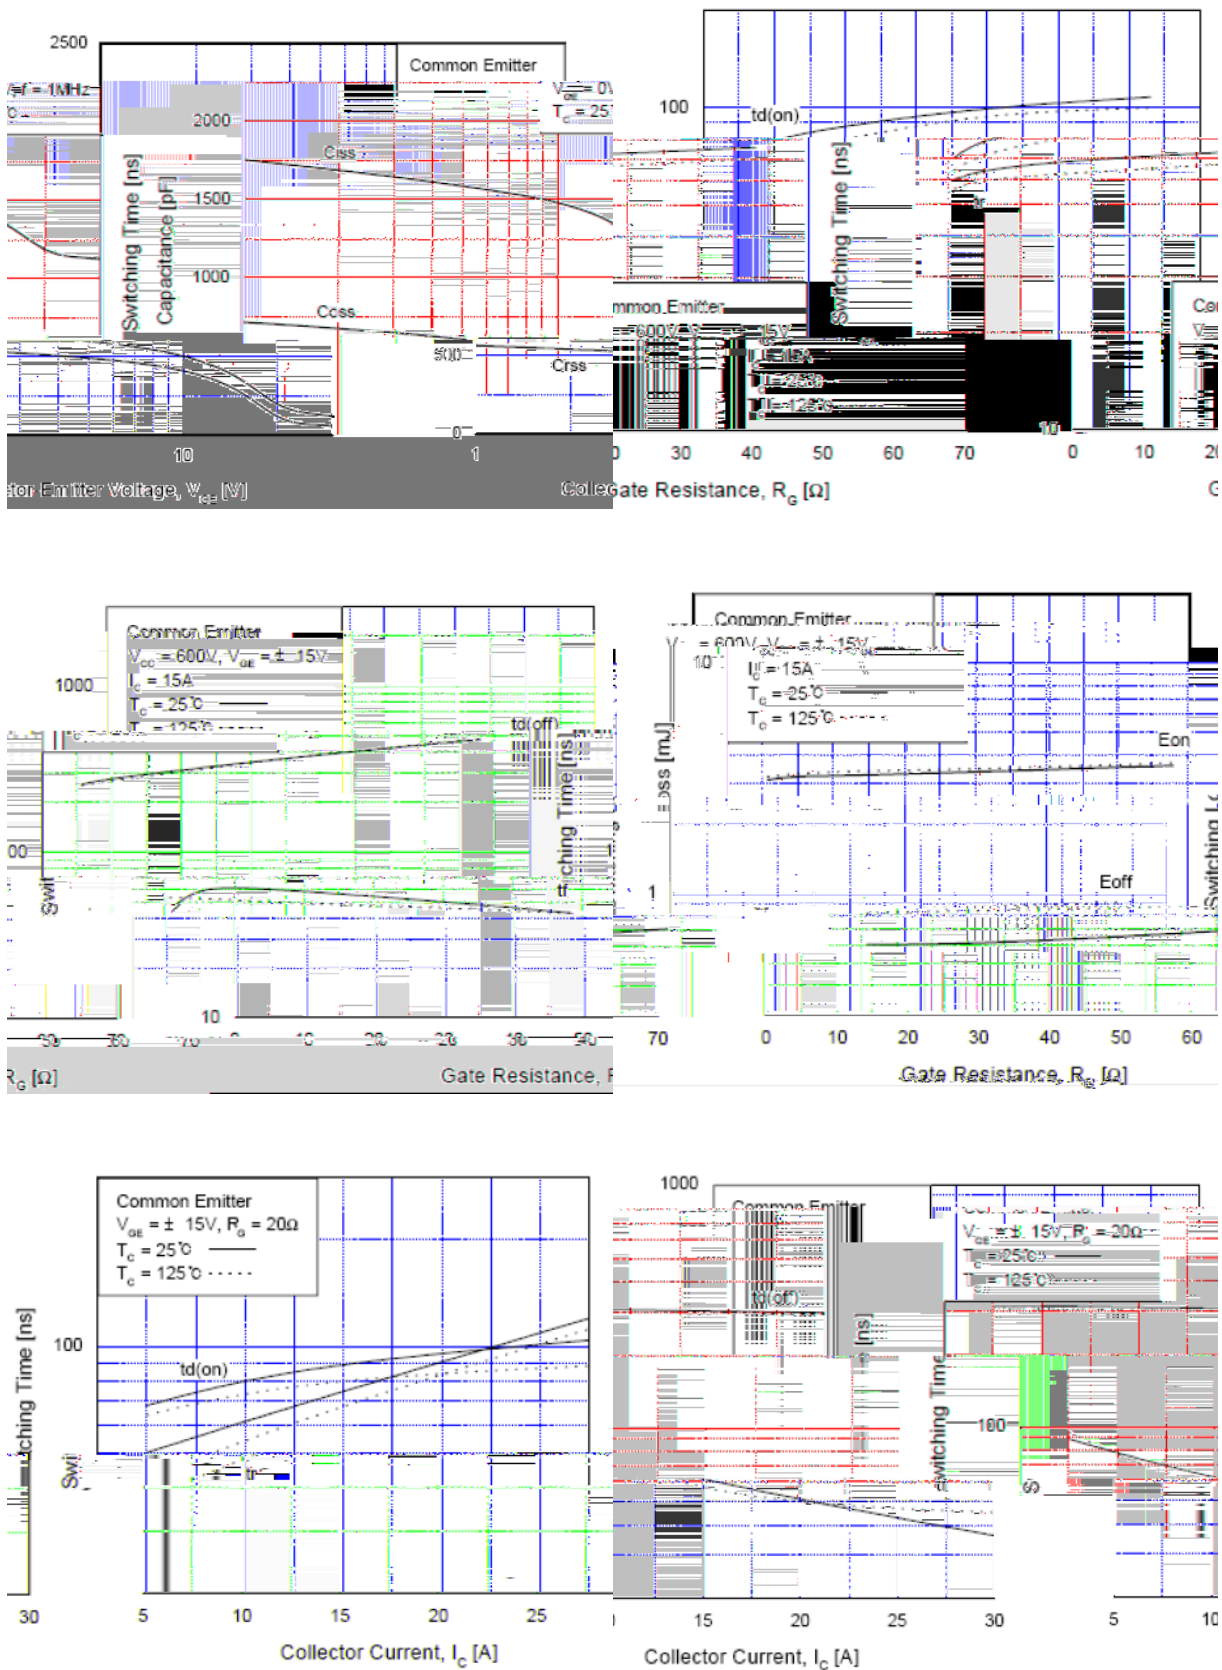

Electrical Characteristic Curve

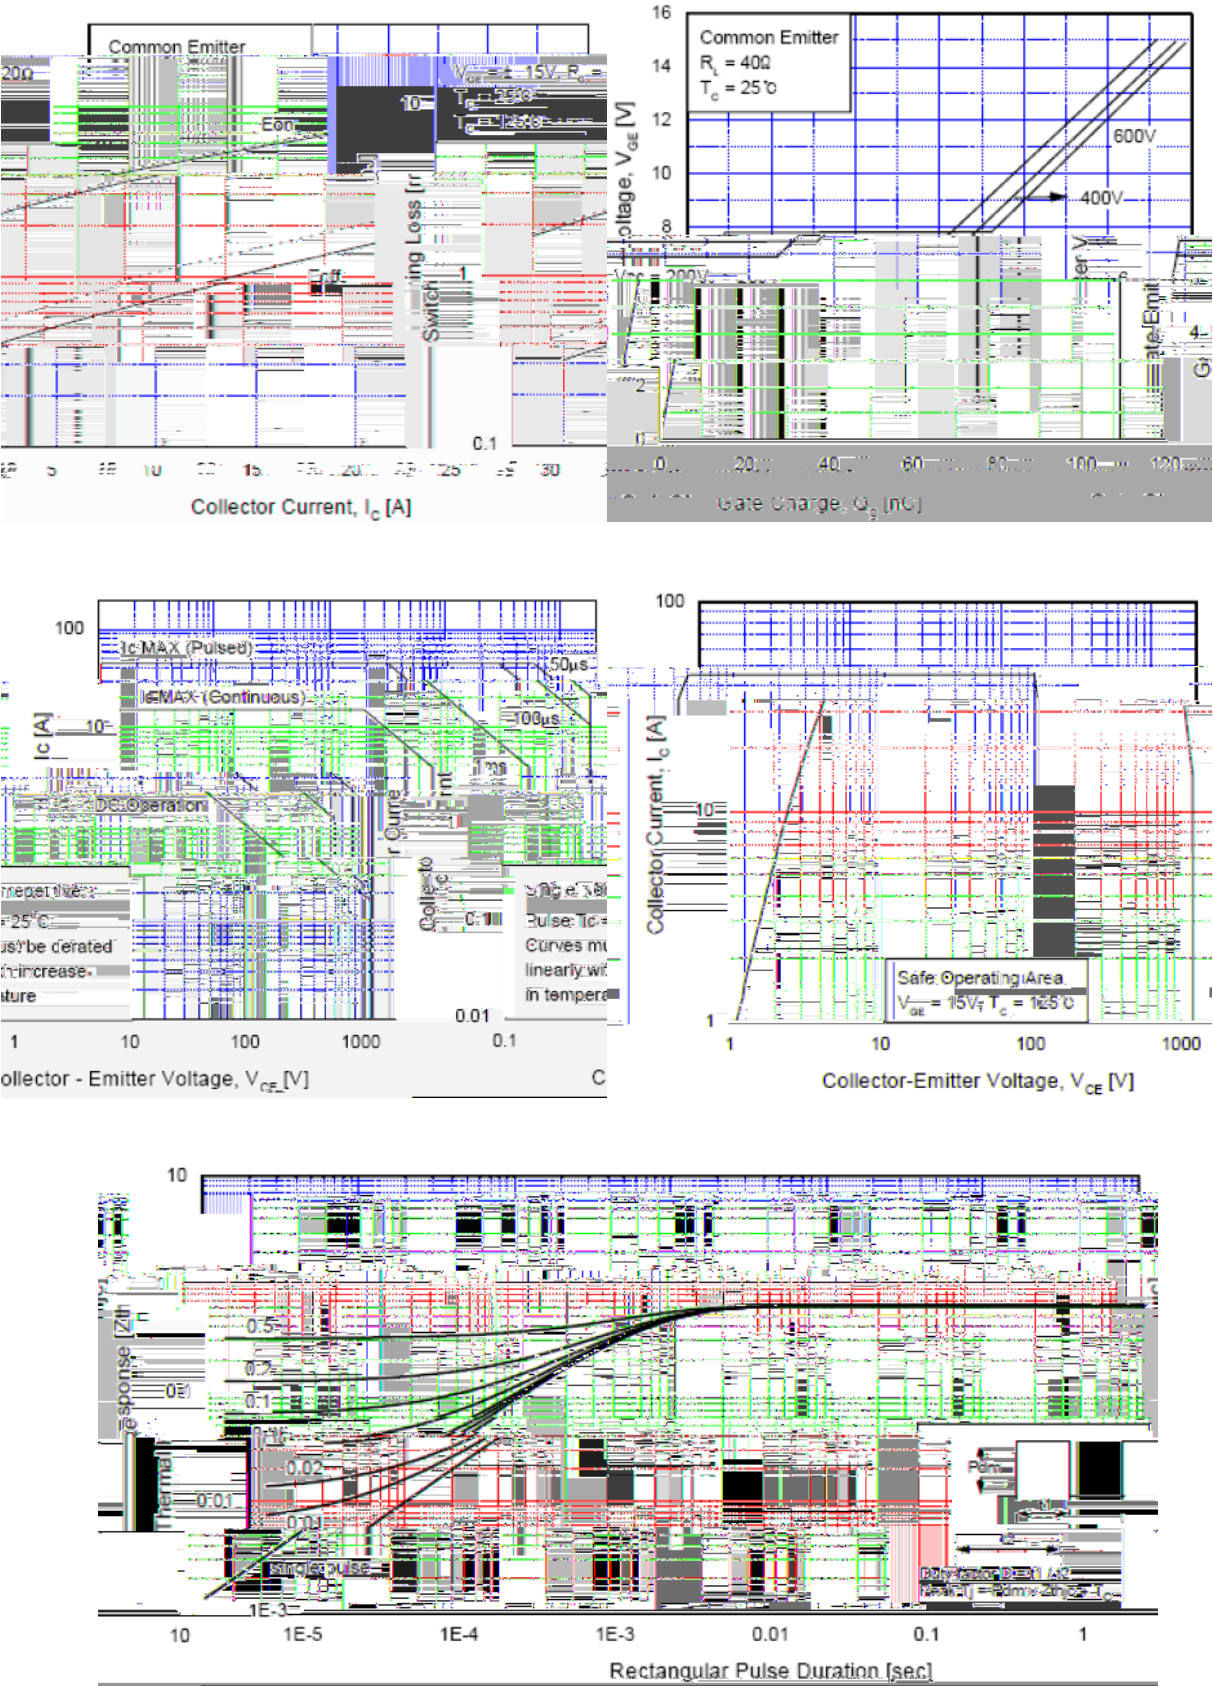


BRGH15N120D



DATA SHEET




Ø □ =) ⌀ / Package Dimensions

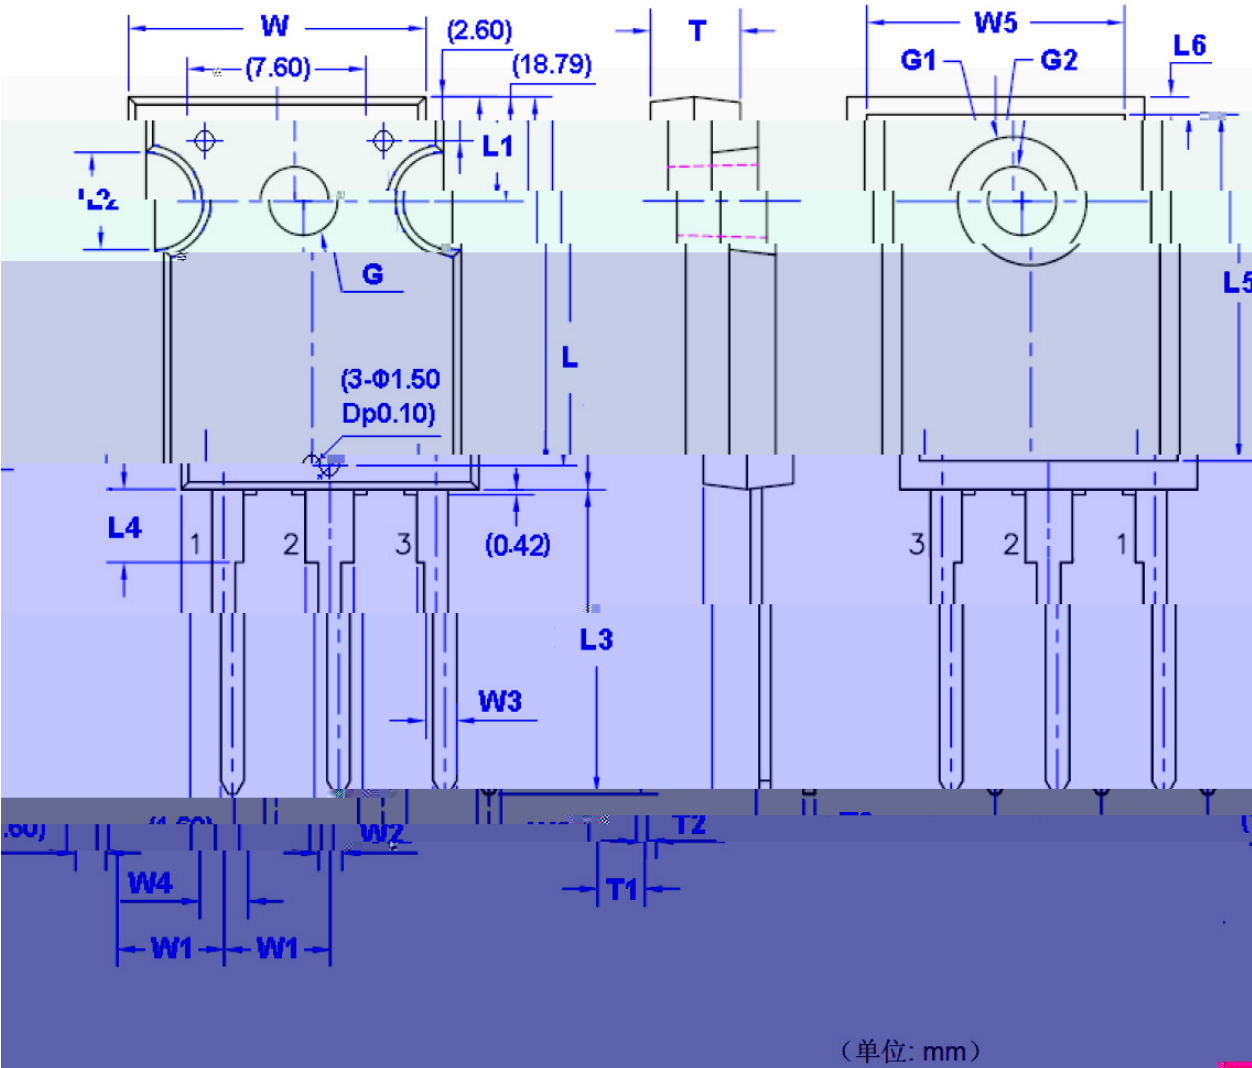

尺寸		尺寸		尺寸		尺寸	
符号	Max	符号	Max	符号	Max	符号	Max
W	10.37	W5	12.80	L4	3.09	L5	0.50
L1	5.55(TYP)	L2	2.23	L3	1.52	L6	3.51

, My f / Marking Instructions

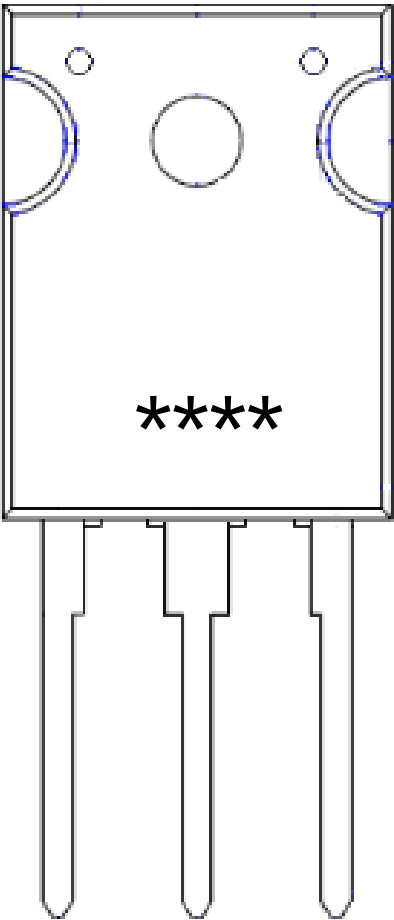

TM ¢ y

(8

- 4 * y


y

Π [W A

D } ∫ Z

˘ D Z W A k ö˘ D Z J oû

G PD t... • Ž ¢ (x /) / Temperature Profile for Dip Soldering(Pb-Free)

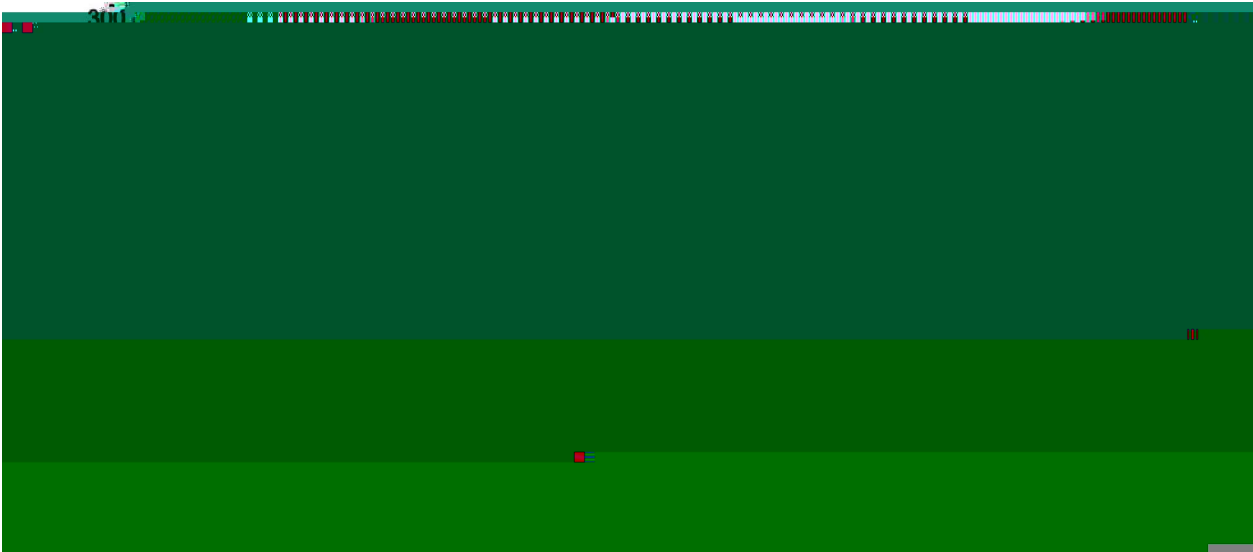

™ ¢ y
où fΩì Ü Ω - k û Ω -
où Q òì Ü r - k û 4“ r r - r
oùD N Úi “ 0 , Ü Ω -

ÂD /Cã p ¯ »] / Resistance to Soldering Heat Test Conditions

ì Ü y r - û yr

G P á / Packaging SPEC.

ï í x

ß m ù ´	g m ô h					g m d Ê !		
	Units/Tube /Š •	Tubes/Inner Box Š • / ¢	Units/Inner Box / ¢	Inner Boxes/Outer Box ¢ / ±	Units/Outer Box / ±	TubeŠ •	Inner Box¢	Outer Box±
TO-247	30	15	450	5	2250	497.5×46×8	555×164×50	575×290×180

„ Ð y f / Notices