

[illegible]


/ Descriptions

SOT-363 NPN+PNP
Double NPN PNP


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



Pin 1: E2	Pin 4: E1
Pin 2: B2	Pin 5: B1
Pin 3: C1	Pin 6: C2

/ h_{FE} Classifications & Marking

/ Maximum Ratings, Total Device -

参数	符号	数值	单位
	θ		℃
		~	℃

/ Absolute Maximum Ratings(Ta=25) (NPN 2222A)

参数	符号	数值	单位



/ Absolute Maximum Ratings(Ta=25) (PNP 2907A)

参数	符号	数值	单位


--	--	--	--	--	--	--

°C


/ Electrical Characteristic Curve

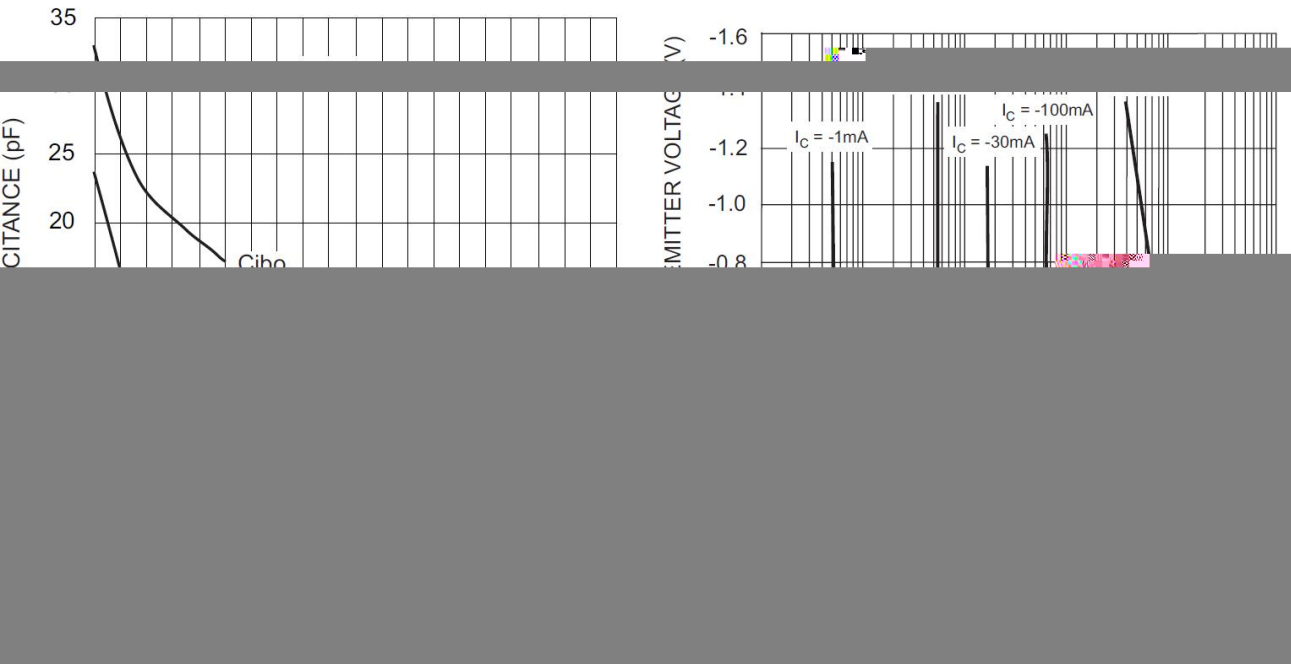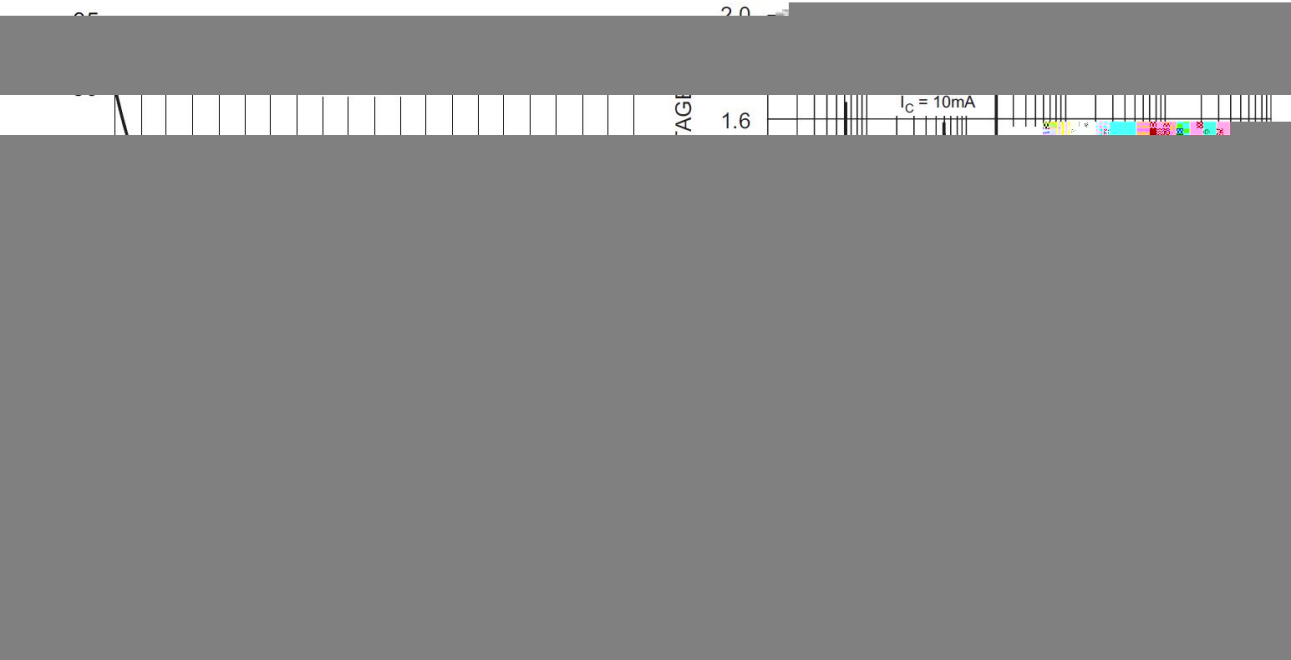

/ Package Dimensions

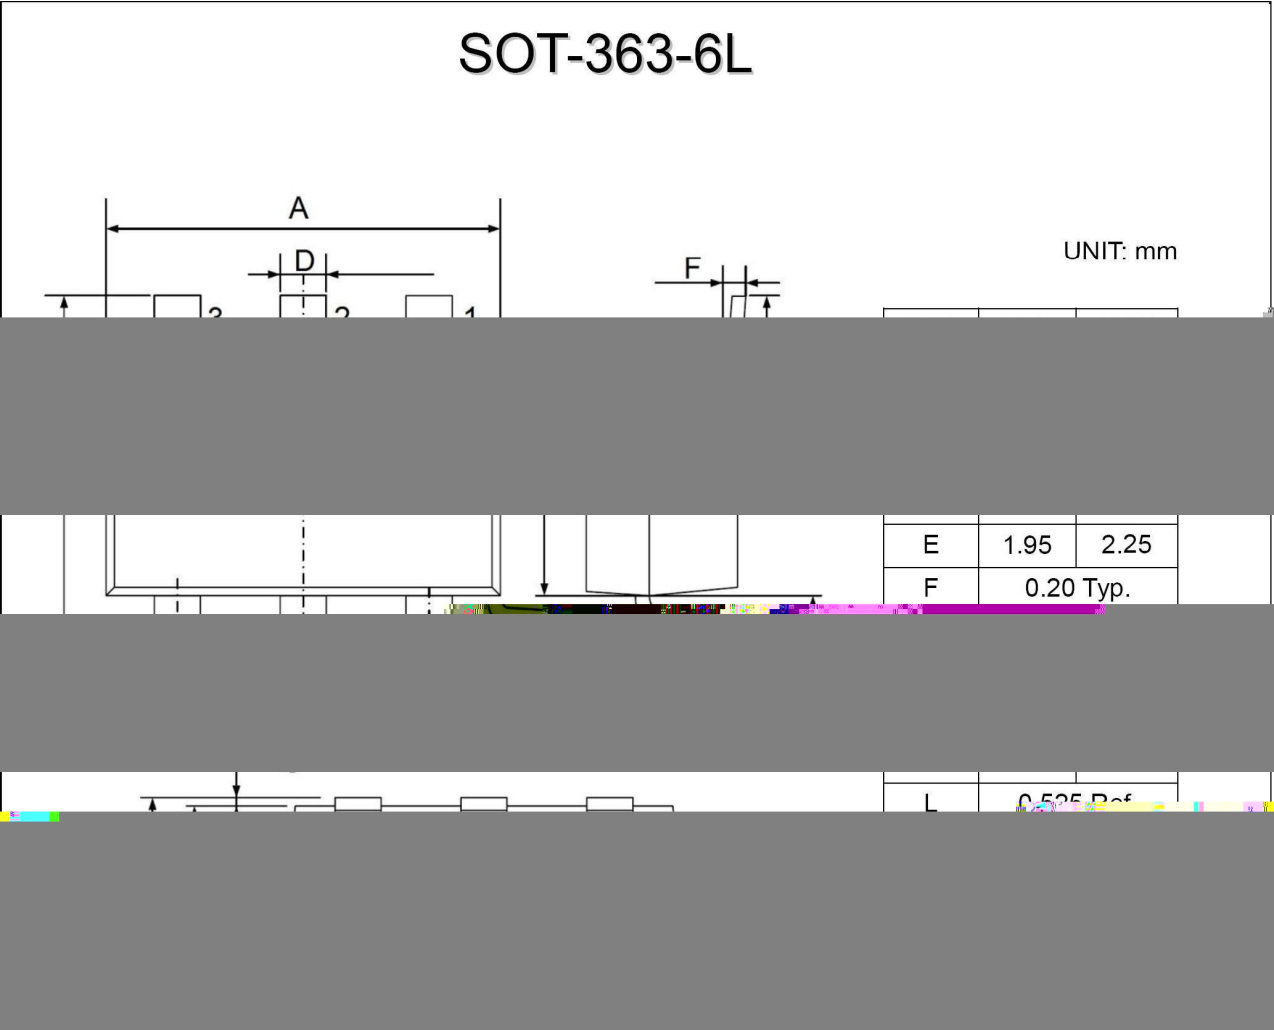

/ Marking Instructions

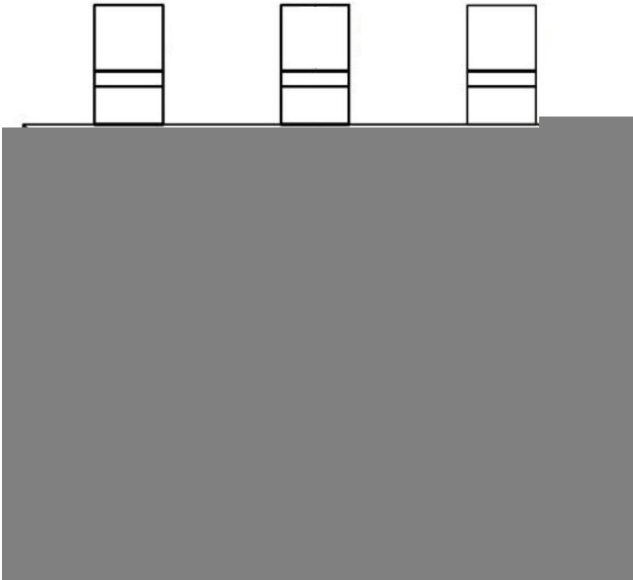

•

•

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

±

°C

±

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

±

°C

±

°C

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	只/卷盘	卷盘/盒	只/盒	盒/箱	只/箱			
SOT-363	3,000	10	30,000	6	180000	7" ×8	180×120×180	390×385×205