



NPN PNP

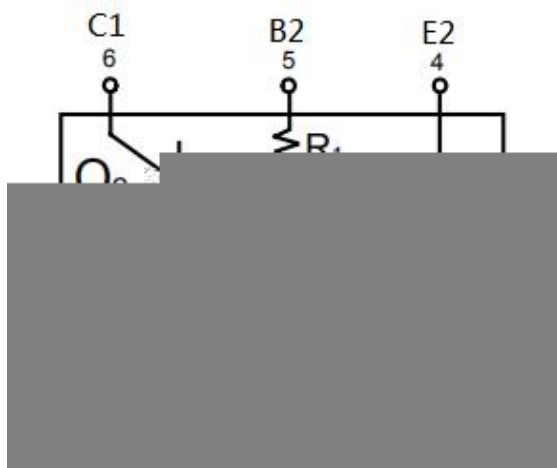


Q1:PNP
Q2:NPN

--	--











			°C
		~	°C

[illegible]





			°C
		~	°C

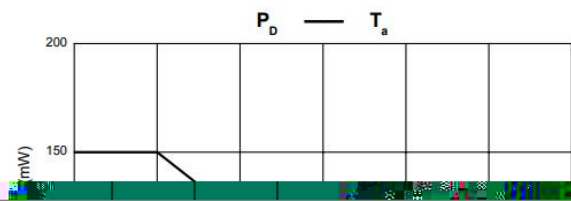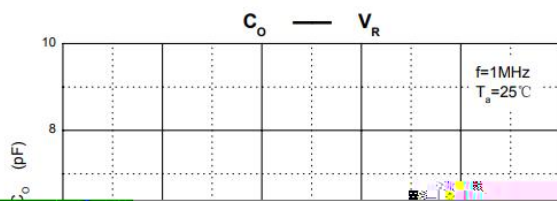

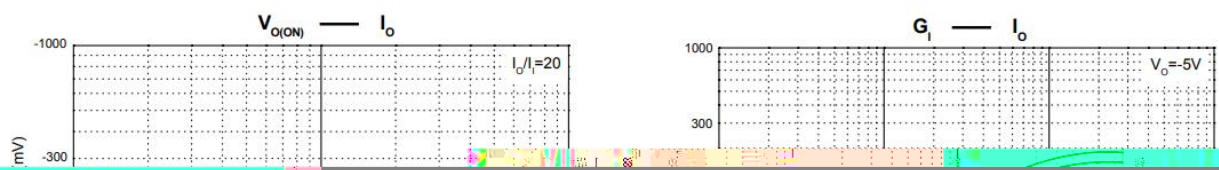




OFF Characteristics

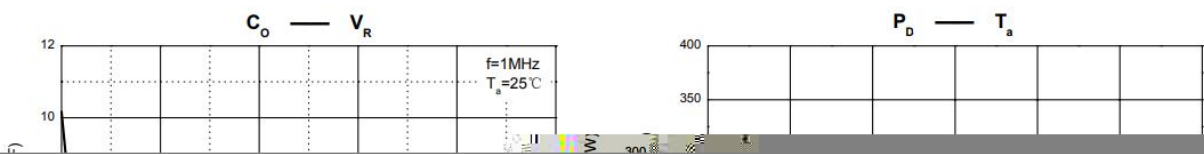



SOT-363-6L

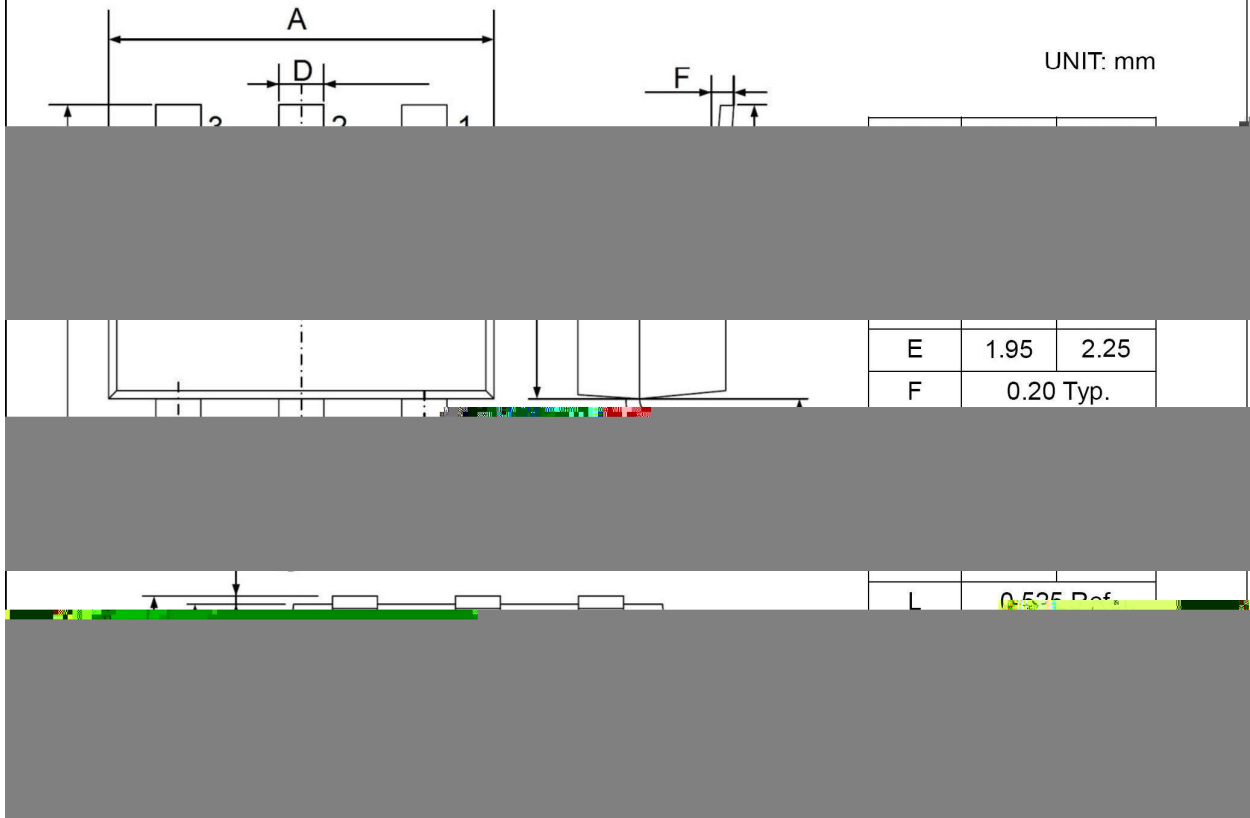

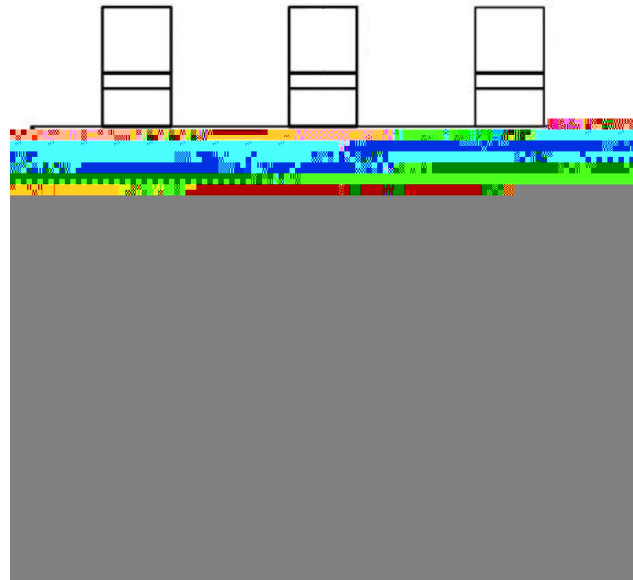

● " 1 "


H311

***.


● "1" Pin

H311

***.



Temperature Profile for IR Reflow Soldering(Pb-Free)

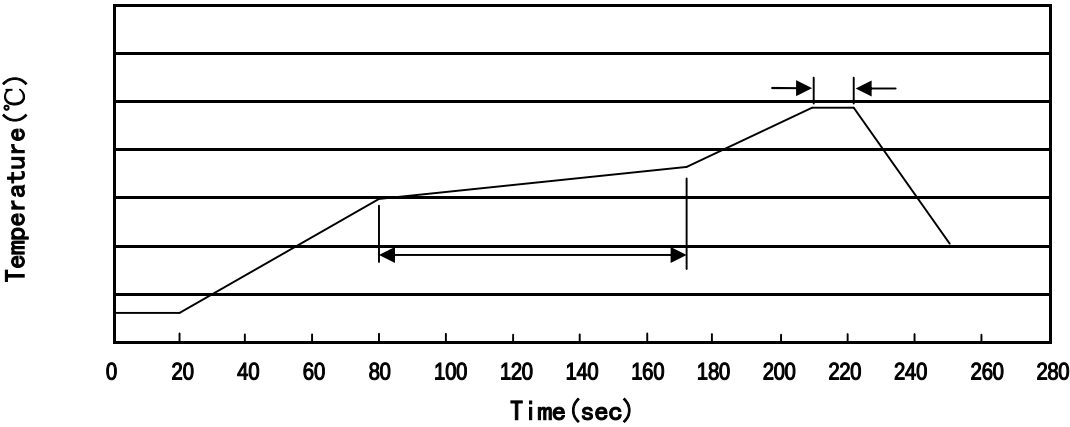

± ± ± ±

± ± °C

	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOT-363	3,000	10	30,000	6	180000	7" ×8	180×120×180	390×385×205