

/ Descriptions

WR0596


Ultrafast Recovery Diode in a TO-263 Plastic Package.

/ Features

Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.

/ Applications

For high frequency, high voltage, high current rectifier diode, freewheeling diode.

/ Equivalent Circuit**/ Pinning**

PIN1 Anode

PIN 2 4 Cathode

PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
RMS Voltage	V_{RMS}	420	V
DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward Current	I_F	1 30	A
Peak forward surge current	I_{FSM}	300	A
Typical Thermal Resistance Junction to Case	$R_{\theta JC}$	2.0	/W
Junction Temperature Range	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=5.0A$ $T_C=25$			1.35	V
		$I_F=5.0A$ $T_C=150$			1.15	
		$I_F=30A$ $T_C=25$			1.65	
		$I_F=30A$ $T_C=150$			1.25	
Instantaneous Reverse Current Note1	I_R	$V_R=600V$ $T_a=25$			0.25	mA
		$V_R=420V$ $T_a=150$			1	
		$V_R=600V$ $T_a=150$			2	
Reverse Recovery Time	t_{rr}	$I_F=0.5A$ $I_R=1.0A$ $I_{RR}=0.25A$			50	ns

2Notes


1.

2.

2Short duration pulse test used to minimize self-heating

2 Unless otherwise noted, values for the parameters of a

/ Electrical Characteristic Curve

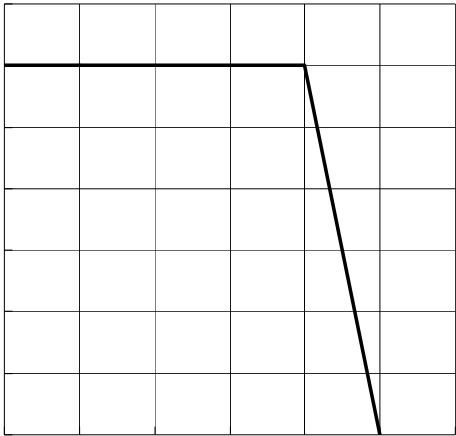

Technical drawing of a rectangular component, likely a sensor or actuator, showing two views: a front view (left) and a side view (right).

Front View (Left):

- Overall width: D
- Overall height: E
- Top flange width: B
- Top flange thickness: 4
- Central circular feature (hole or sensor): $L3$
- Bottom mounting bracket width: $b1$
- Bottom mounting bracket height: 2
- Bottom mounting bracket base width: $e1$
- Bottom mounting bracket base height: $e2$
- Bottom mounting bracket base width (right side): b


Side View (Right):

- Overall width: A
- Overall height: $L1$
- Top flange width: C
- Bottom mounting bracket width: $b2$
- Bottom mounting bracket height: 2

单位: mm

		Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
				Min	Max			Min	Max
		A		4.30	4.70	E		9.00	9.40

/ Marking Instructions

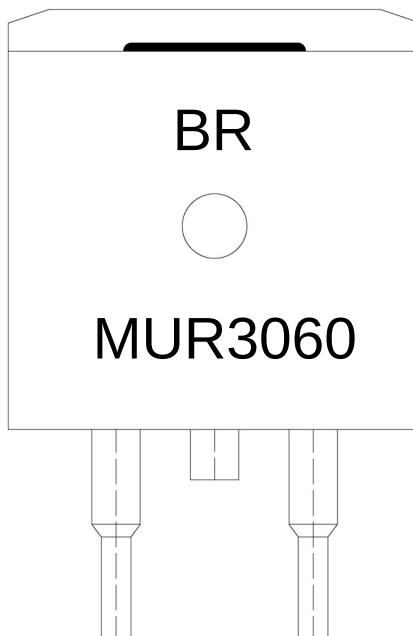

EU

P XU6393

Note:

BR: Company Code

MUR3060 Product Type.

****: Lot No. Code, code change with Lot No.

BRMUR3060BD

Rev.A Mar.-2019