

/ Descriptions

TO-220F


/ Features

/ Applications


OR-ing

DC-DC

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

		~	






/ Electrical Characteristics(Ta=25)

		℃				
		℃				
		℃				
	()					

/Notes

1.
2.

/ Electrical Characteristic Curve

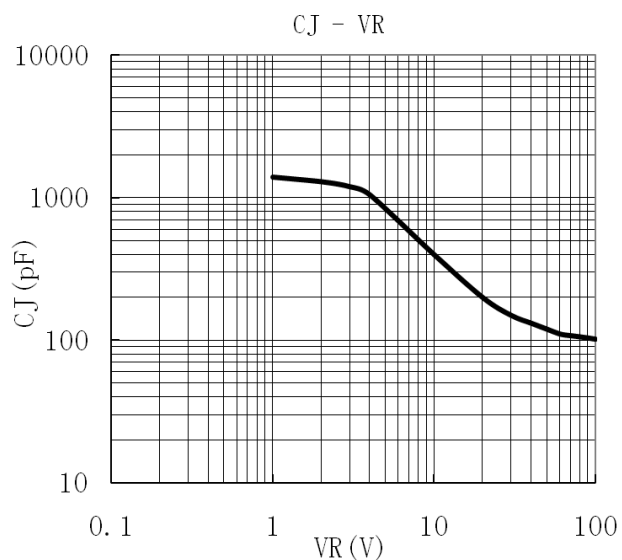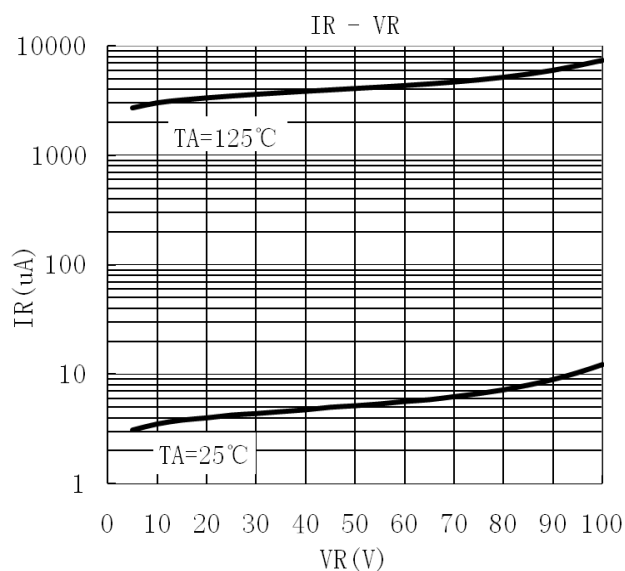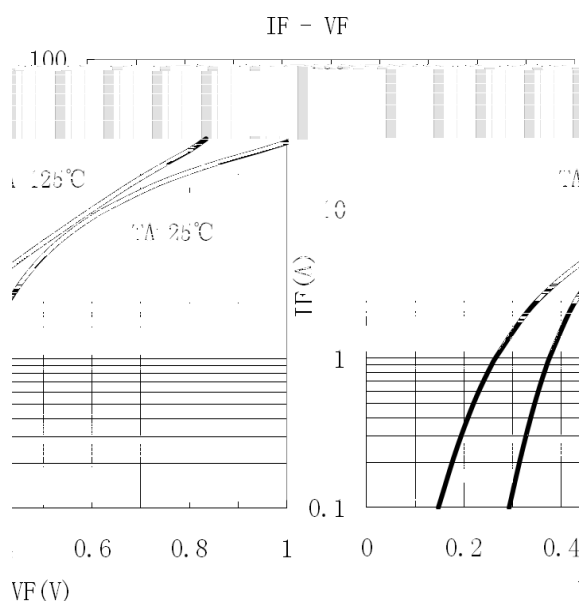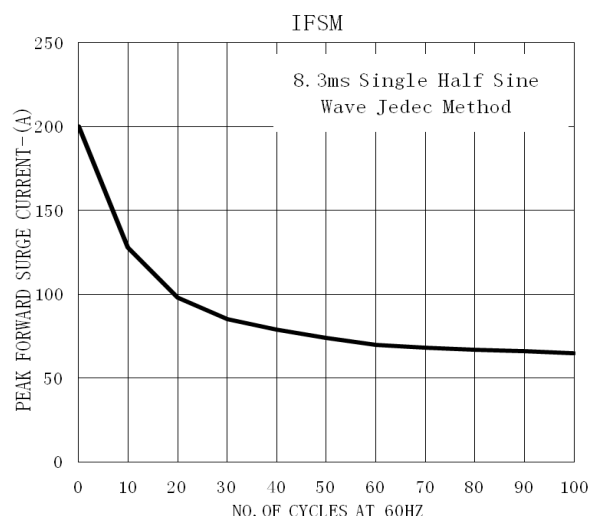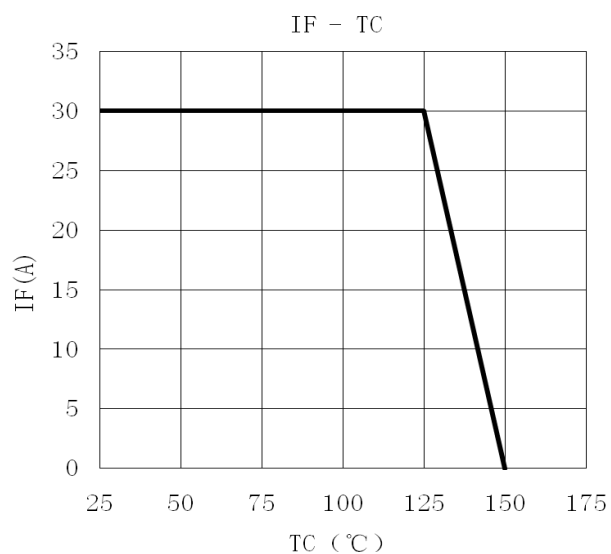


/ Package Dimensions

T0-220F

单位: 




/ Marking Instructions

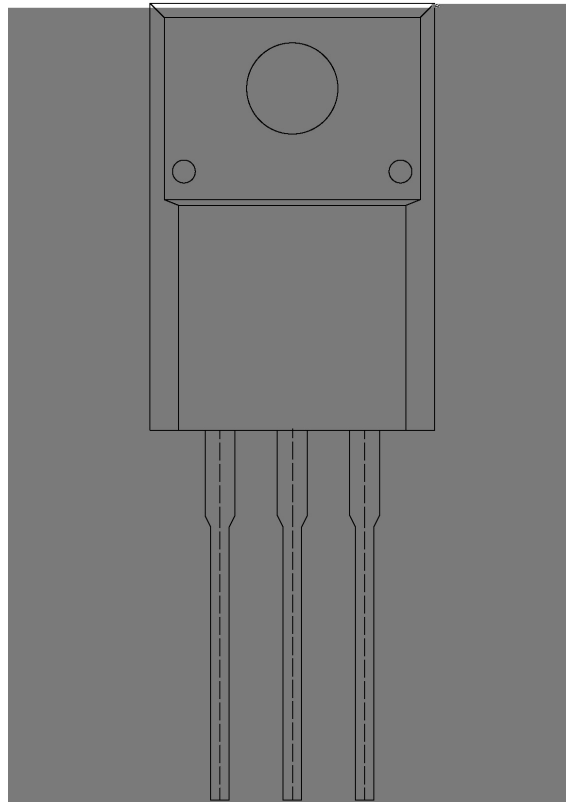

：

() / Temperature Profile for Dip Soldering(Pb-Free)

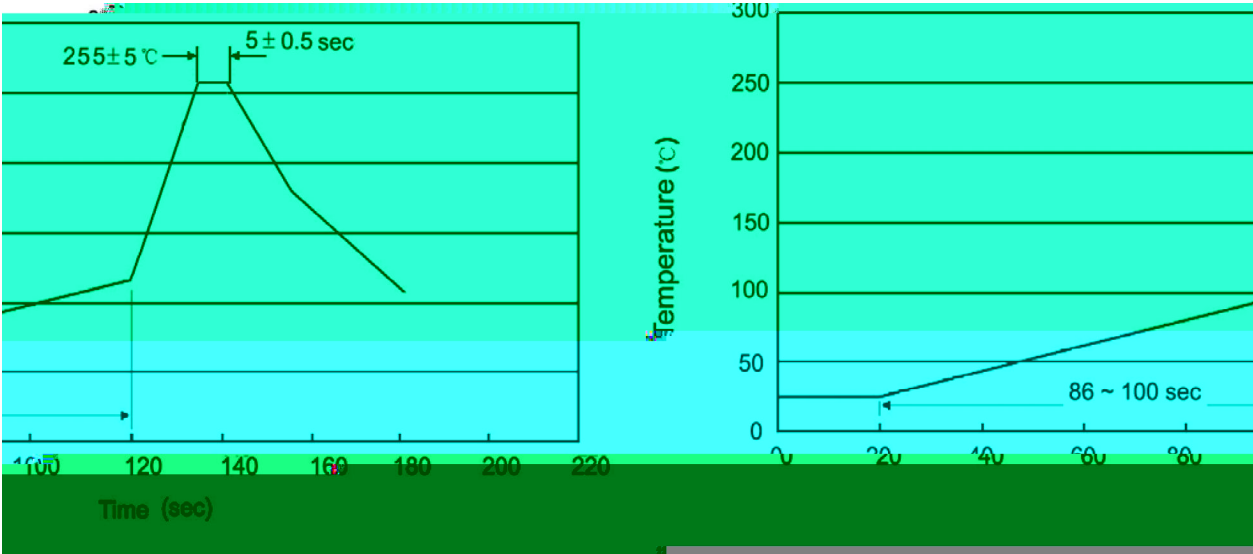

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只套管	套管盒	只盒	盒箱	只箱	套管	盒	箱

/ Notices