

MMBT5401W

/ Descriptions


SOT-323                  PNP

/ Features


，                  MMBT5551W

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |


/ Absolute Maximum Ratings(Ta=25 )

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |


/ Electrical Characteristics(Ta=25 )

|  |  |  |  |  |  |   |
|--|--|--|--|--|--|---|
|  |  |  |  |  |  |   |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  | μ |


/ Electrical Characteristic Curve

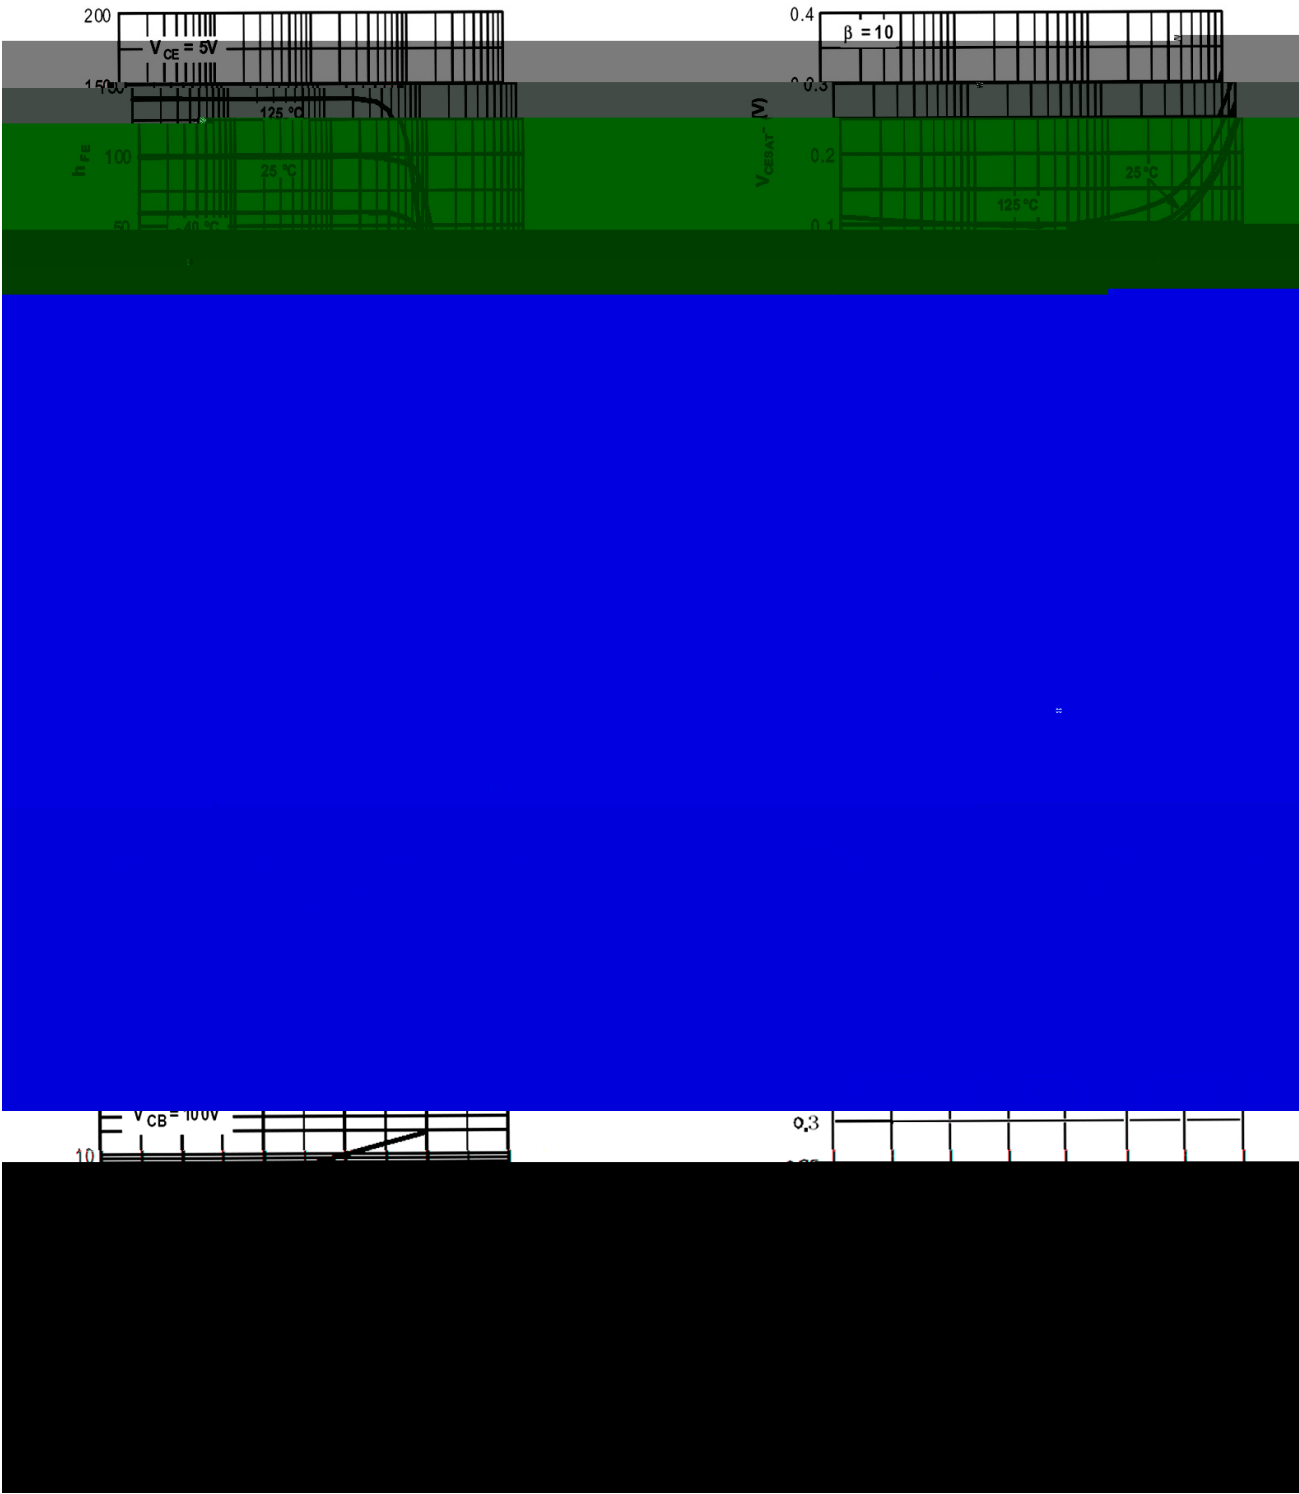


/ Package Dimensions

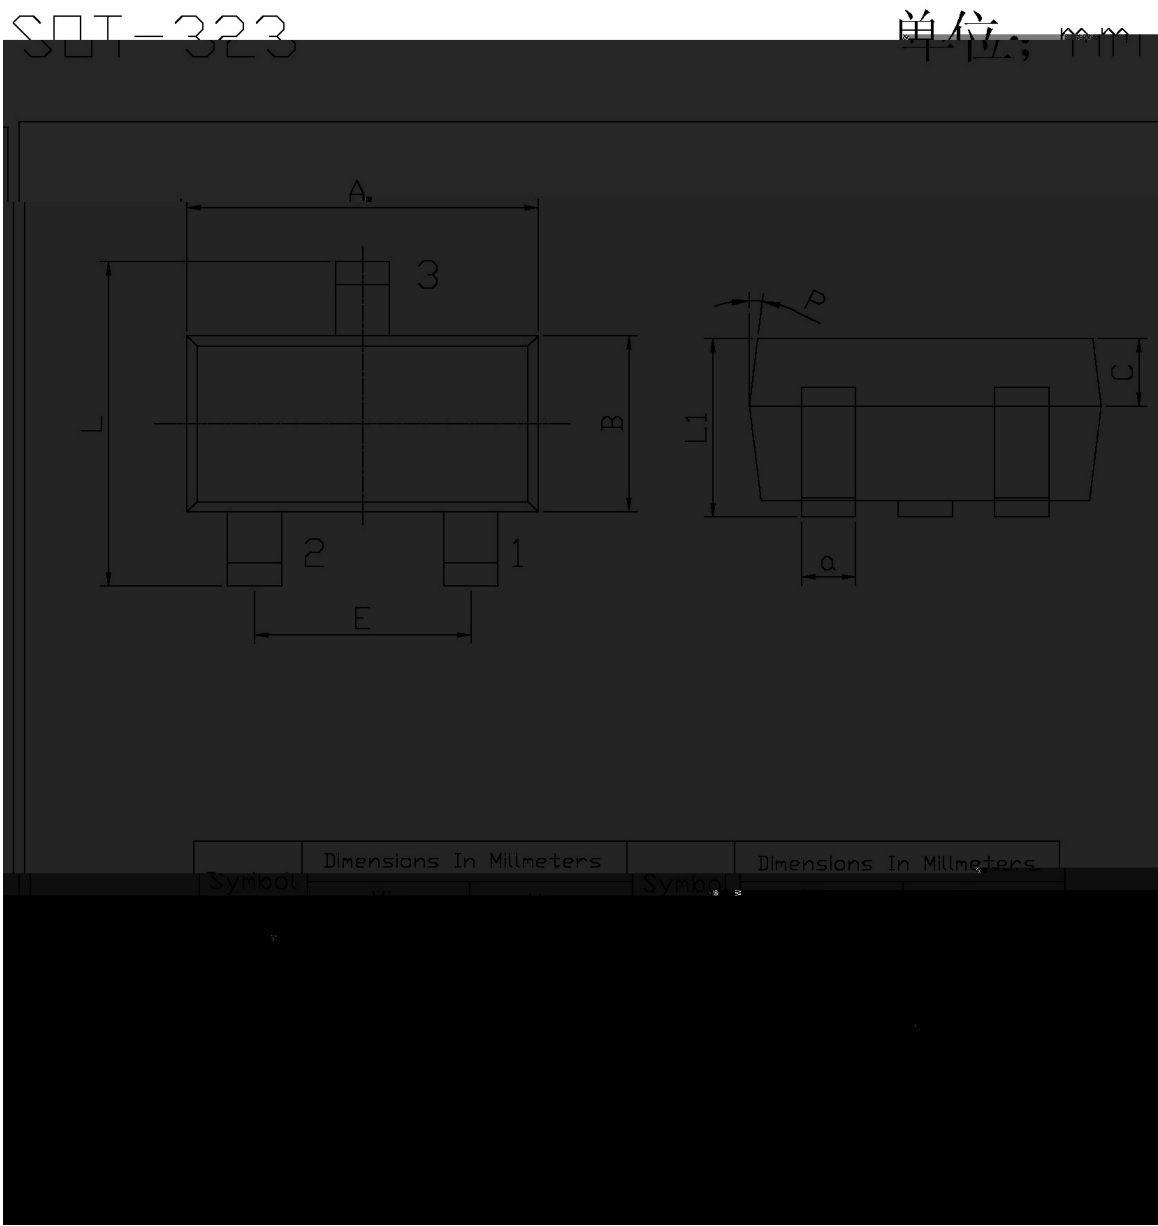

/ Marking Instructions

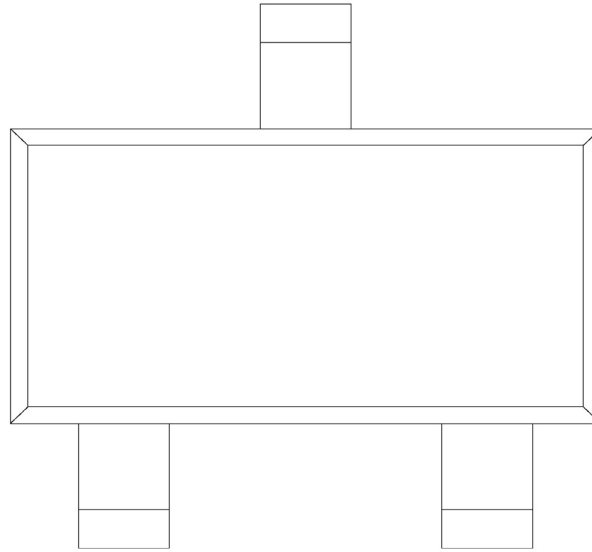

( ) /

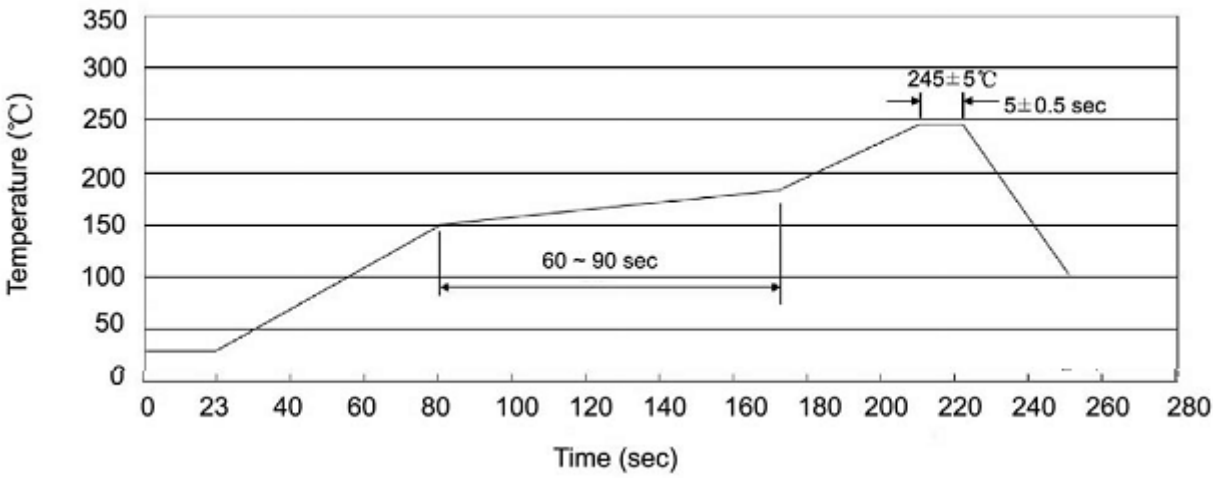

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

| 封装形式    | 包装数量               |                         |                        |                              |                        | 包装尺寸 |             |             |
|---------|--------------------|-------------------------|------------------------|------------------------------|------------------------|------|-------------|-------------|
|         | Units/Reel<br>只/卷盘 | Reels/Inner Box<br>卷盘/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |
| SOT-323 | 3,000              | 10                      | 30,000                 | 6                            | 180,000                | 7 ×8 | 180×120×180 | 390×385×205 |

/ Notices