


!"#\$%&


&



	□	□	□		
B	2018-8				
C	2021-10-26	4			

!"#\$%&

&



& & * & & , / 21.A<.3= / &

SOT-363


PNP

& & * & & 7 , : < B1 , / &


600mA

& & * & & %AA9.2 : <.3= / & &

& & * & &) CB.- : 9 , =< 8.12B.< &




& & * & & D.==.=@&



& & * & & 67)&89: / / .; .2 : <.3= / & > & : 1? .=@&

!"#\$%&

&




% %&' ())

&

!"#\$%&

&




& & * & &) 9, 2<1.2:9&86:1:2<, 1./<.2&8B1- , &



!"#\$%&

&



& & *& & D:2?:@,& .G,=/ .3=/&

SOT-363-6L




UNIT: mm


	E	1.95	2.25
	F	0.20 Typ.	

	L	0.525 Ref.	
--	---	------------	--

! " # \$ % &
&



& & * & & : 1 ? . = @ & N = / < 1 B 2 < . 3 = / &

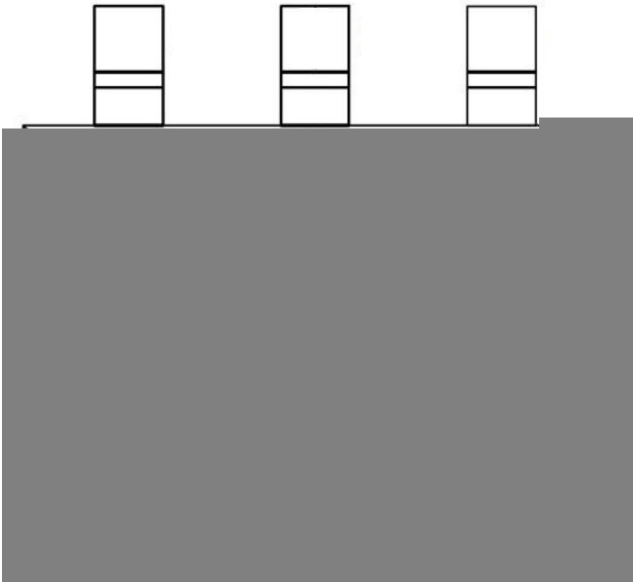


● 1
2F
***.


● "1" Pin
2F
***.

! "\$ % &

&



H K&&*&& Temperature Profile for IR Reflow Soldering(Pb-Free)

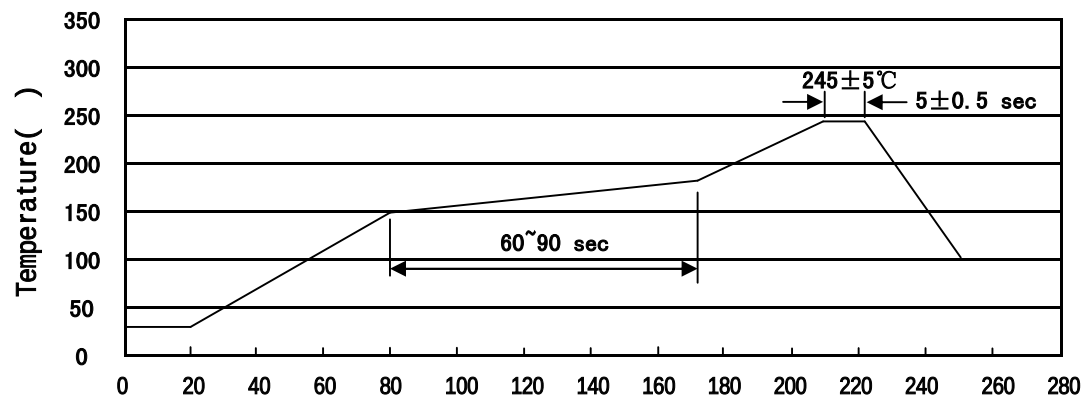

± °C ± °C ± °C ± °C
°C °C

&&*&&& + , / . / < : = 2 , &< 3 && ' 3 9 0 , 1 . = @ && (, : < && , / < && 8 3 = 0 . < . 3 = / &&

± °C ± °C °C

&&*&&& D : 2 ? : @ . = @ && ' D) 8 0 &&

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-363	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

&&*&&& P3<.2 , / &&