


/ Descriptions

TO-220F

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)






	θ		

/ Electrical Characteristics(Ta=25)


						μ
						μ

1.


/ Electrical Characteristic Curve

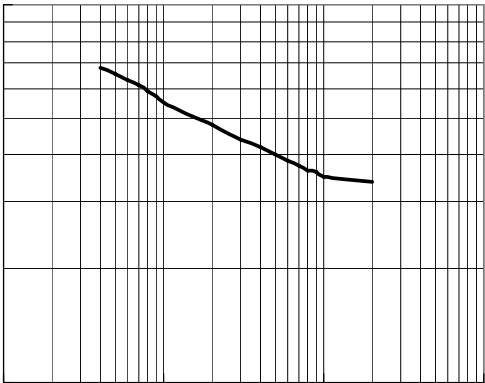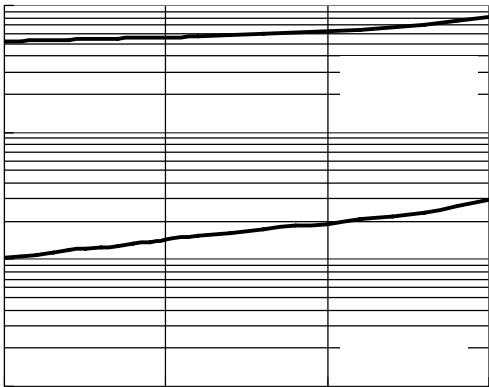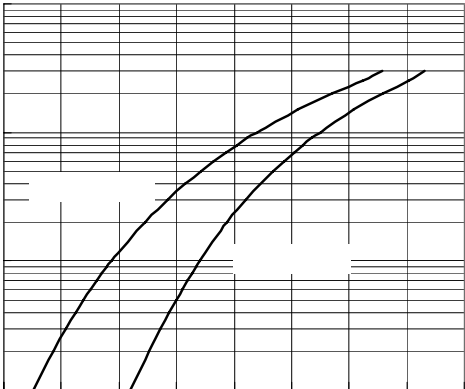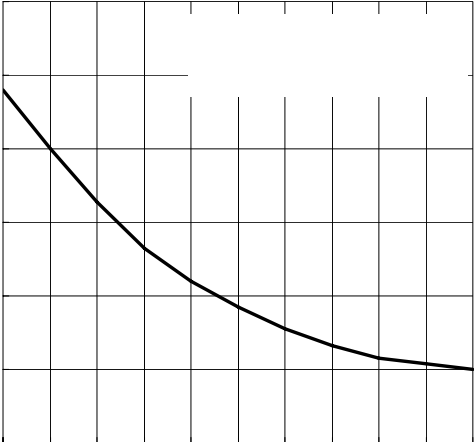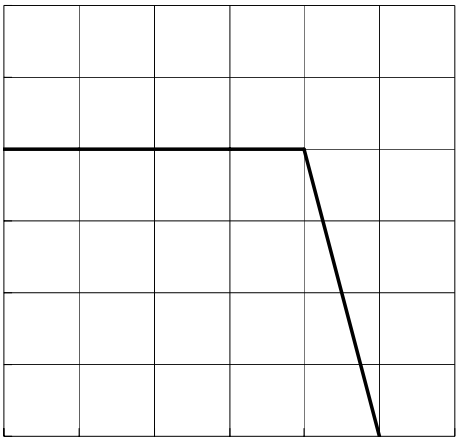

/ Package Dimensions

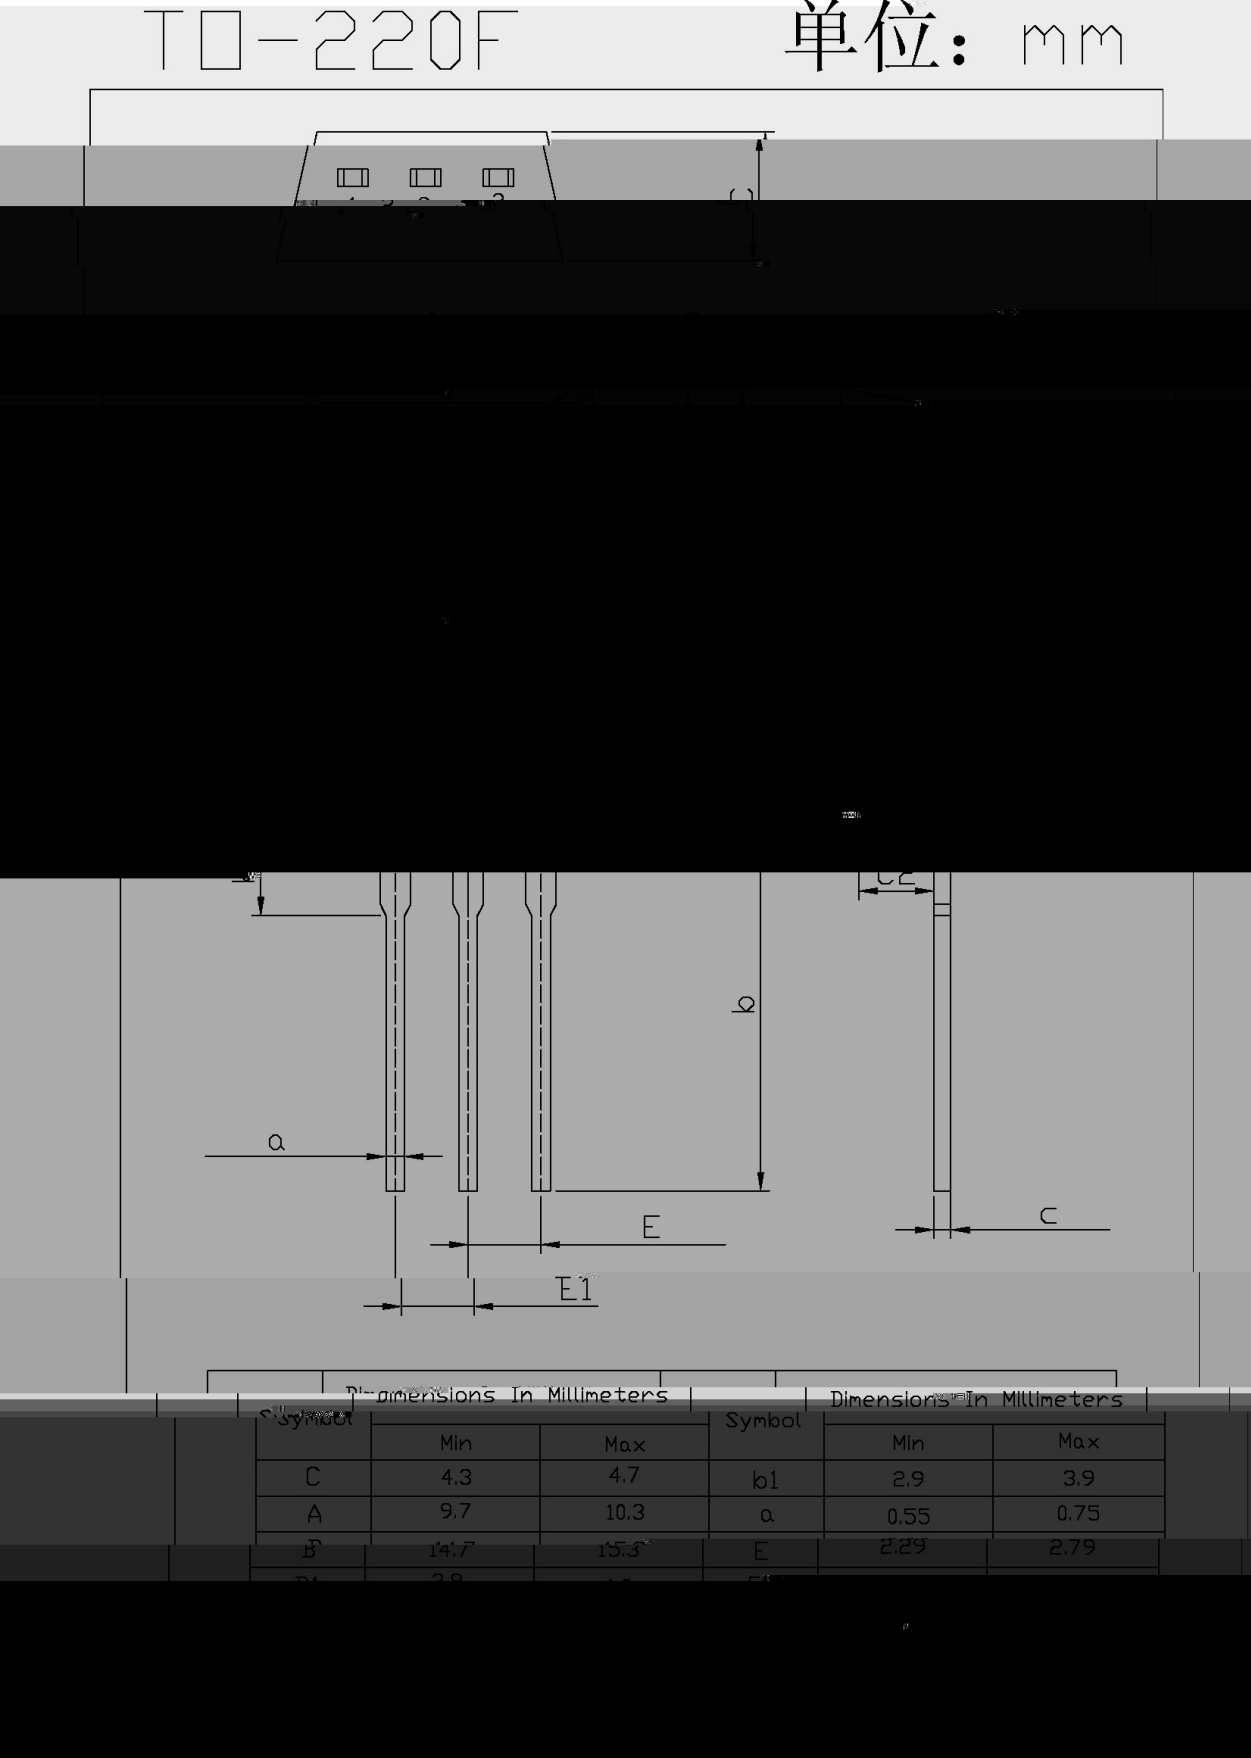

/ Marking Instructions

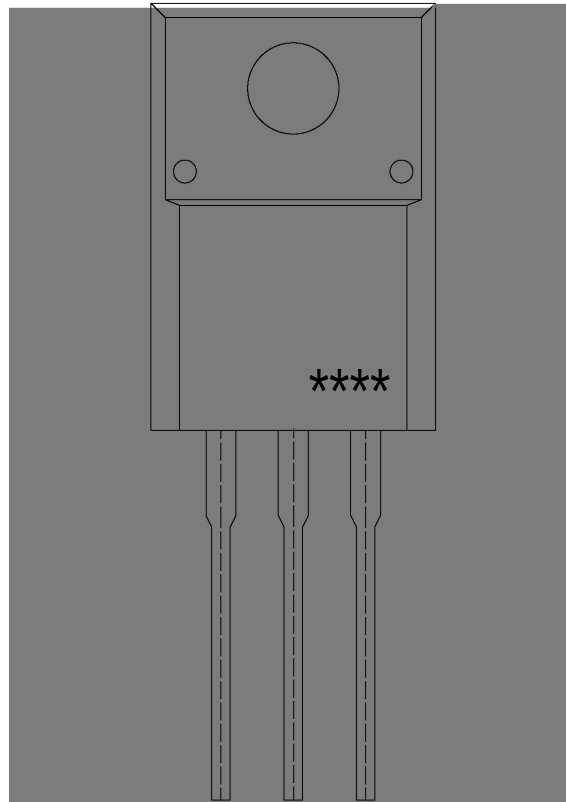

BR

MURF1620

CT:

Initiator Concentration (mol/L)	Polymerization Rate (mol/L·h)
0.0001	0.00005
0.0002	0.00010
0.0003	0.00015
0.0004	0.00020
0.0005	0.00035
0.0006	0.00030
0.0007	0.00025
0.0008	0.00020
0.0009	0.00015
0.0010	0.00010

 $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195