
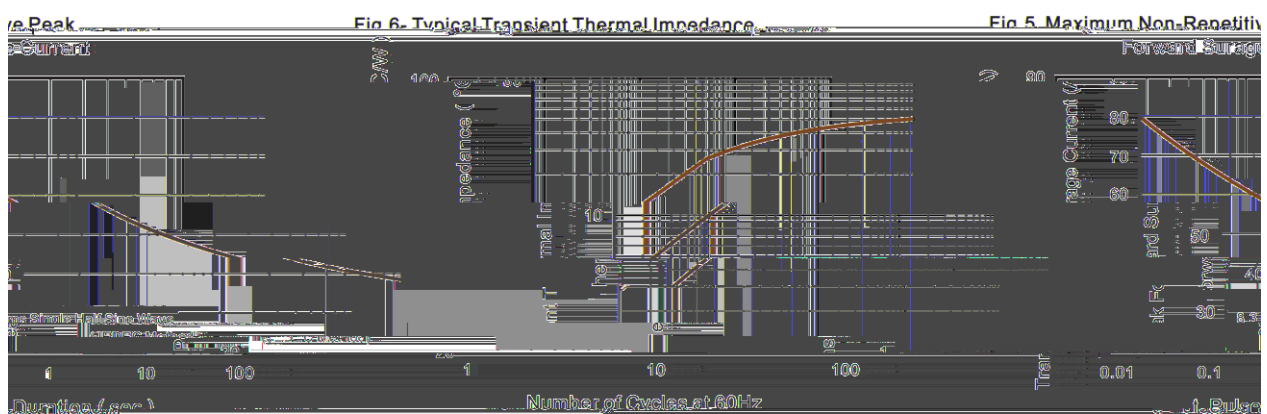
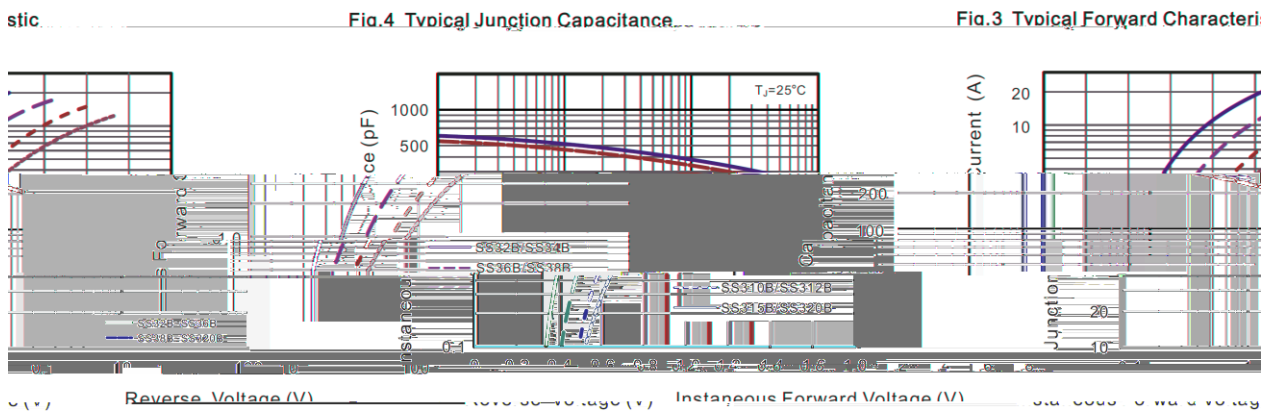


/ Descriptions

SS32B~SS320B


Rev. B Dec.-2023

/ Electrical Characteristic Curve

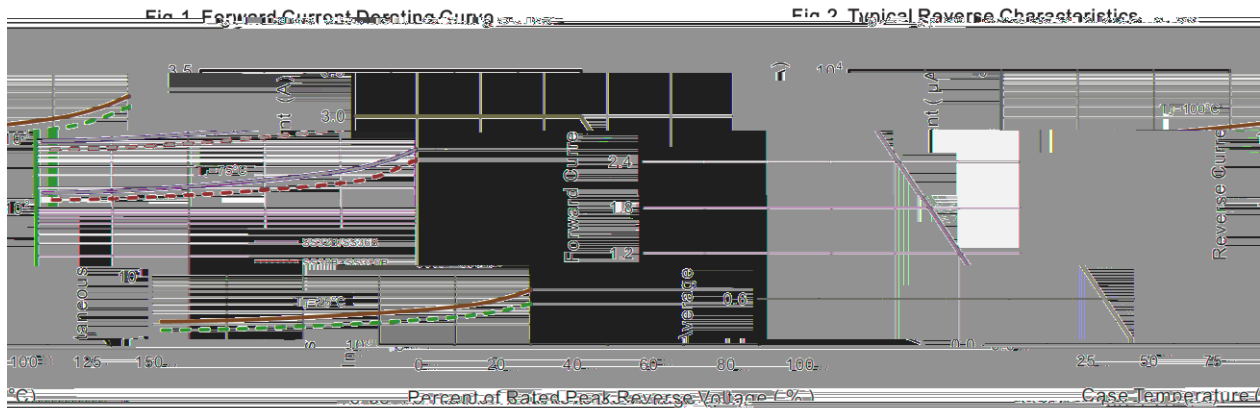

/ Package Dimensions


SMB

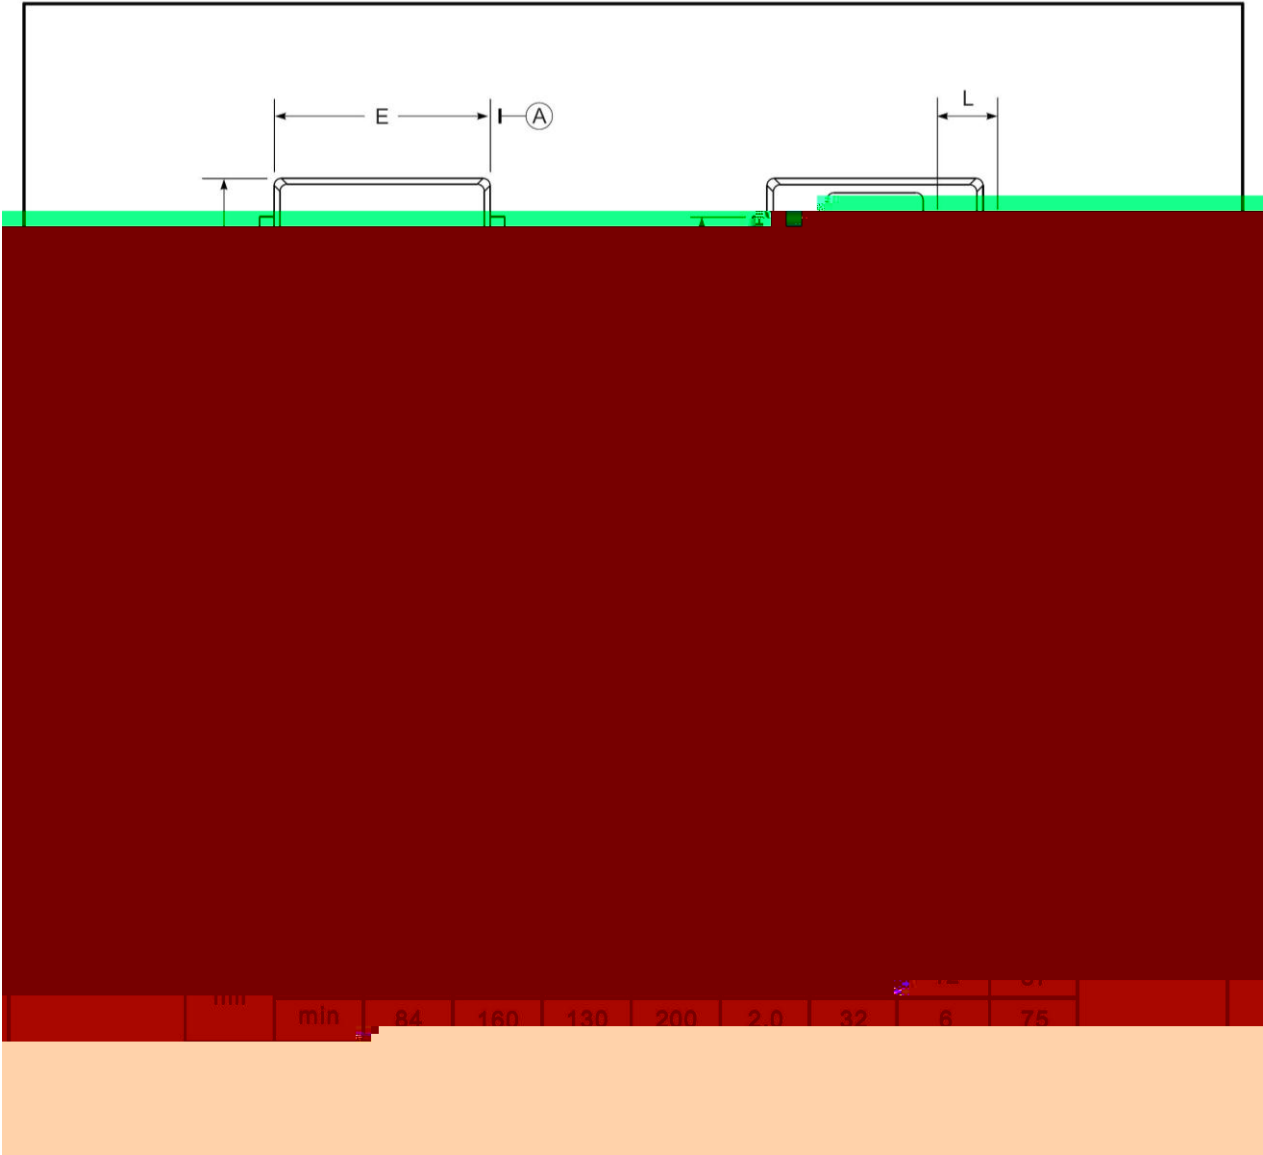

Marking

Type number	Marking	Marking
2	SS32B	SS32
4	SS34B	SS34
6	SS36B	SS36
8	SS38B	SS38
	SS310B	SS310
	SS312B	SS312
	SS315B	SS315
	SS320B	SS320

/ Marking Instructions

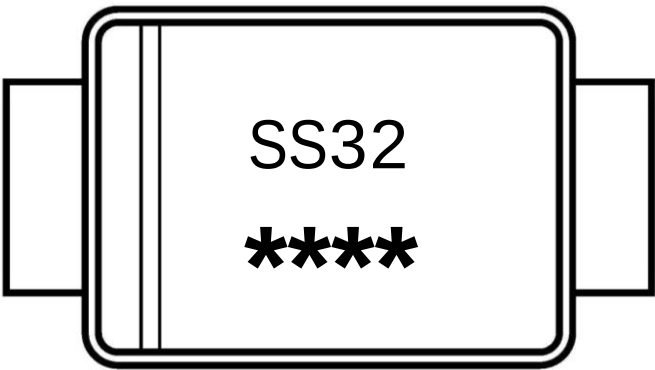

SS32

1


3

Note:

SS32 Product Type Code

**** Lot No. Code The 1st means:YM Code The last 3 means:little Lot No
Code

() /

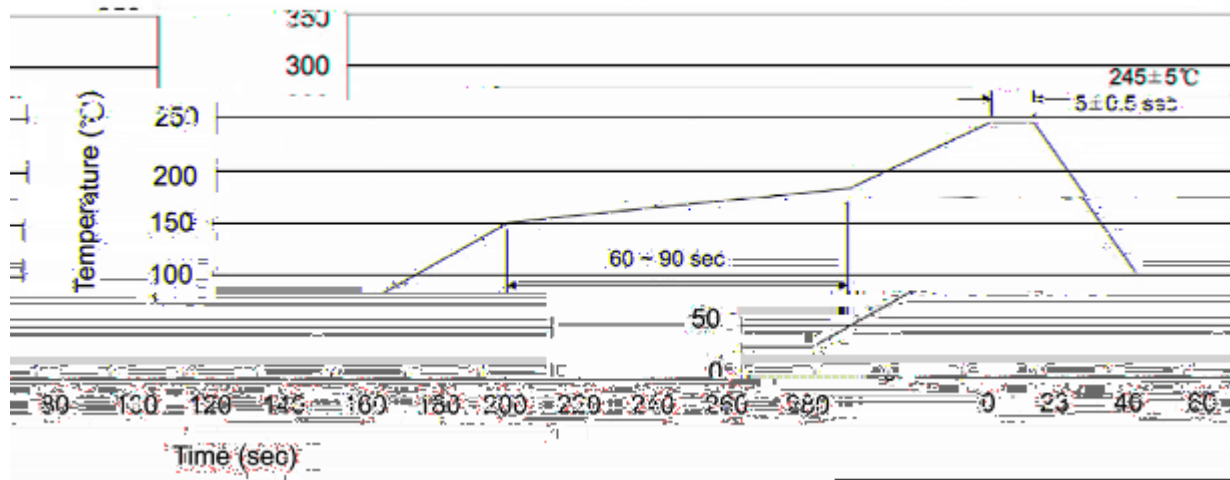

Note:

- 1

25 150

60 90sec;
- 2

245±5

5±0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:245±5

, Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SMB	3,000	2	6,000	7	42,000	13 ×12	336X336X40	380X335X366

/ Notices