



/ Revised record

[illegible]



/ Descriptions

100V 3.0A



/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

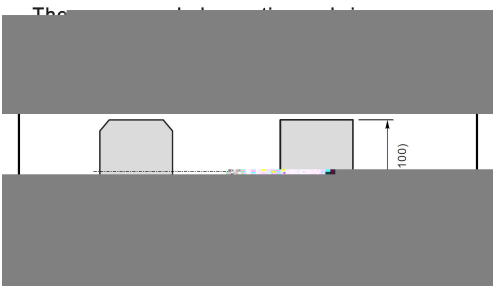

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	()		
)			
)			℃
			℃
			℃

)




)

/ Electrical Characteristics(Ta=25)

		℃ ℃		



/ Electrical Characteristic Curve

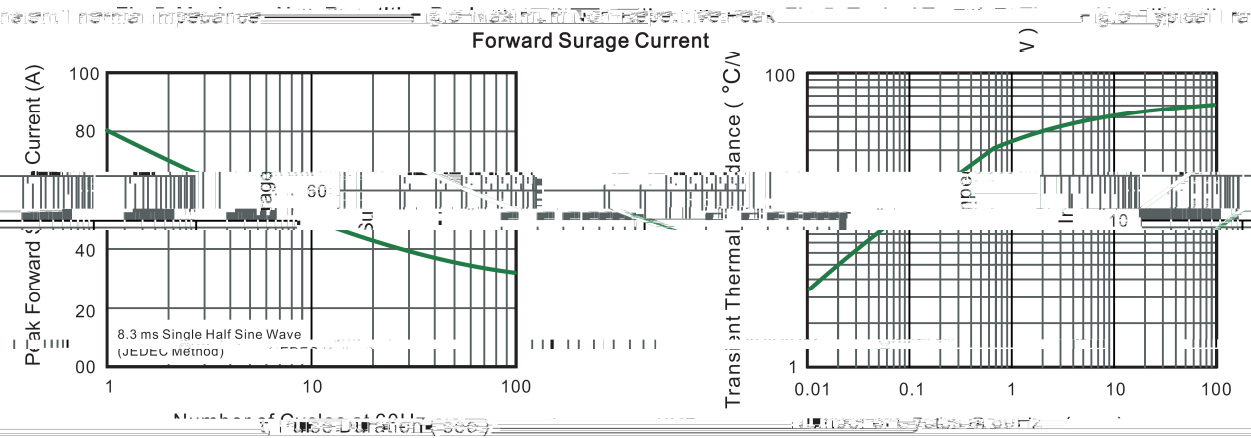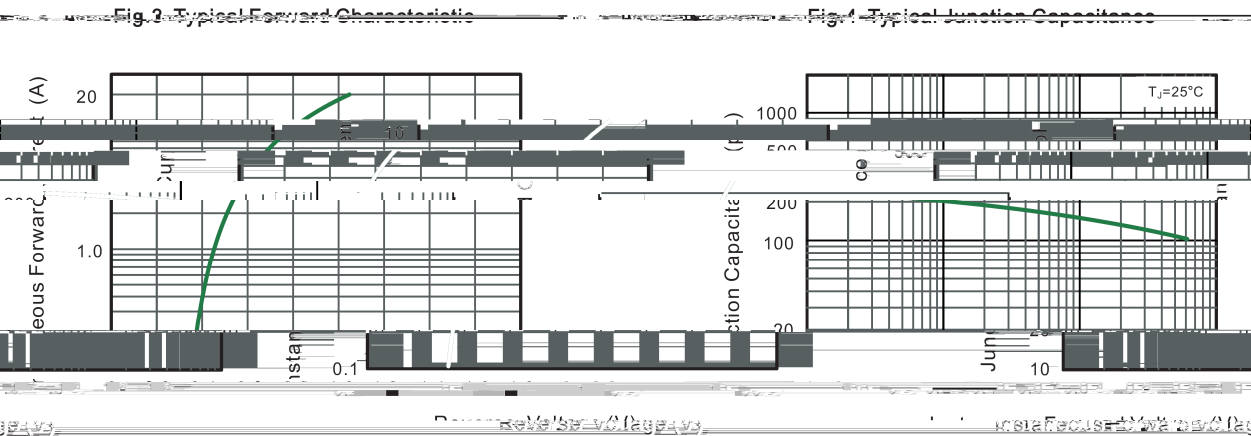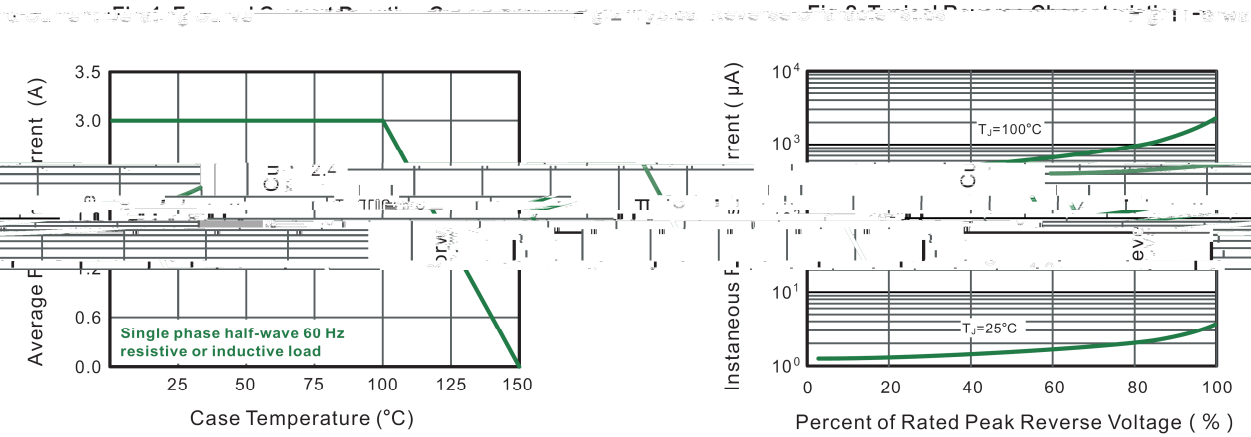




/ Package Dimensions

SMBF




/ Marking Instructions

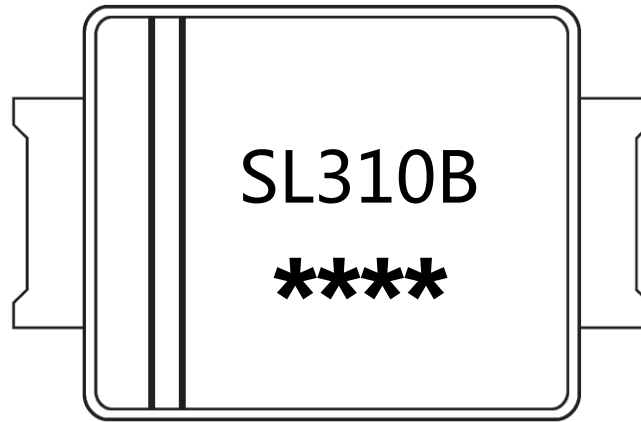



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

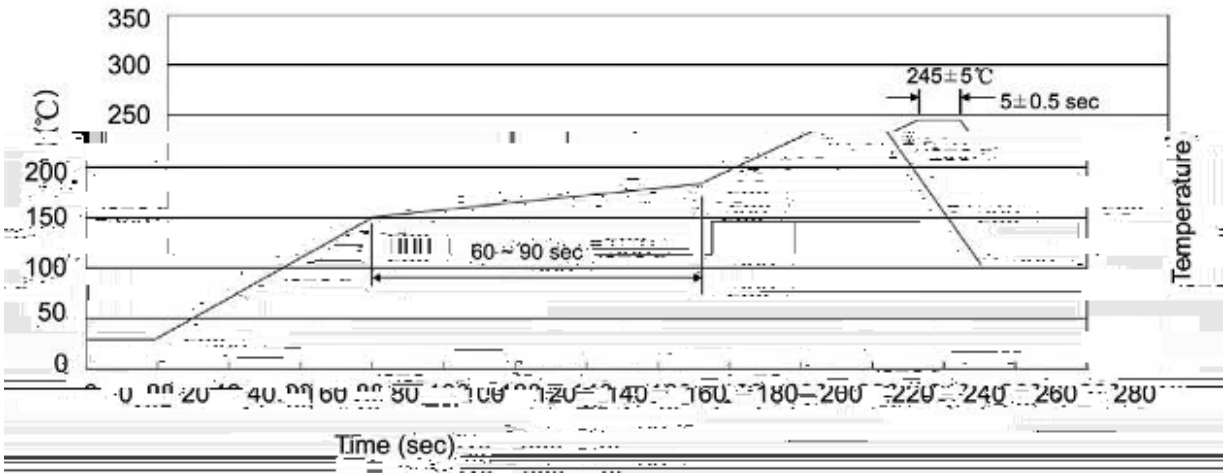

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱	"		

/ Notices